

Projector-E27

SLT-1127



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI

Color Temperature : 3000K

Life Time : 15,000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum and extruded Aluminum body


Mounting : Surface Wall light

Lens : Clear Glass


Finish : Gray RAL 7016

Protection Class : IP 65


Mechanical resistance : IK 08

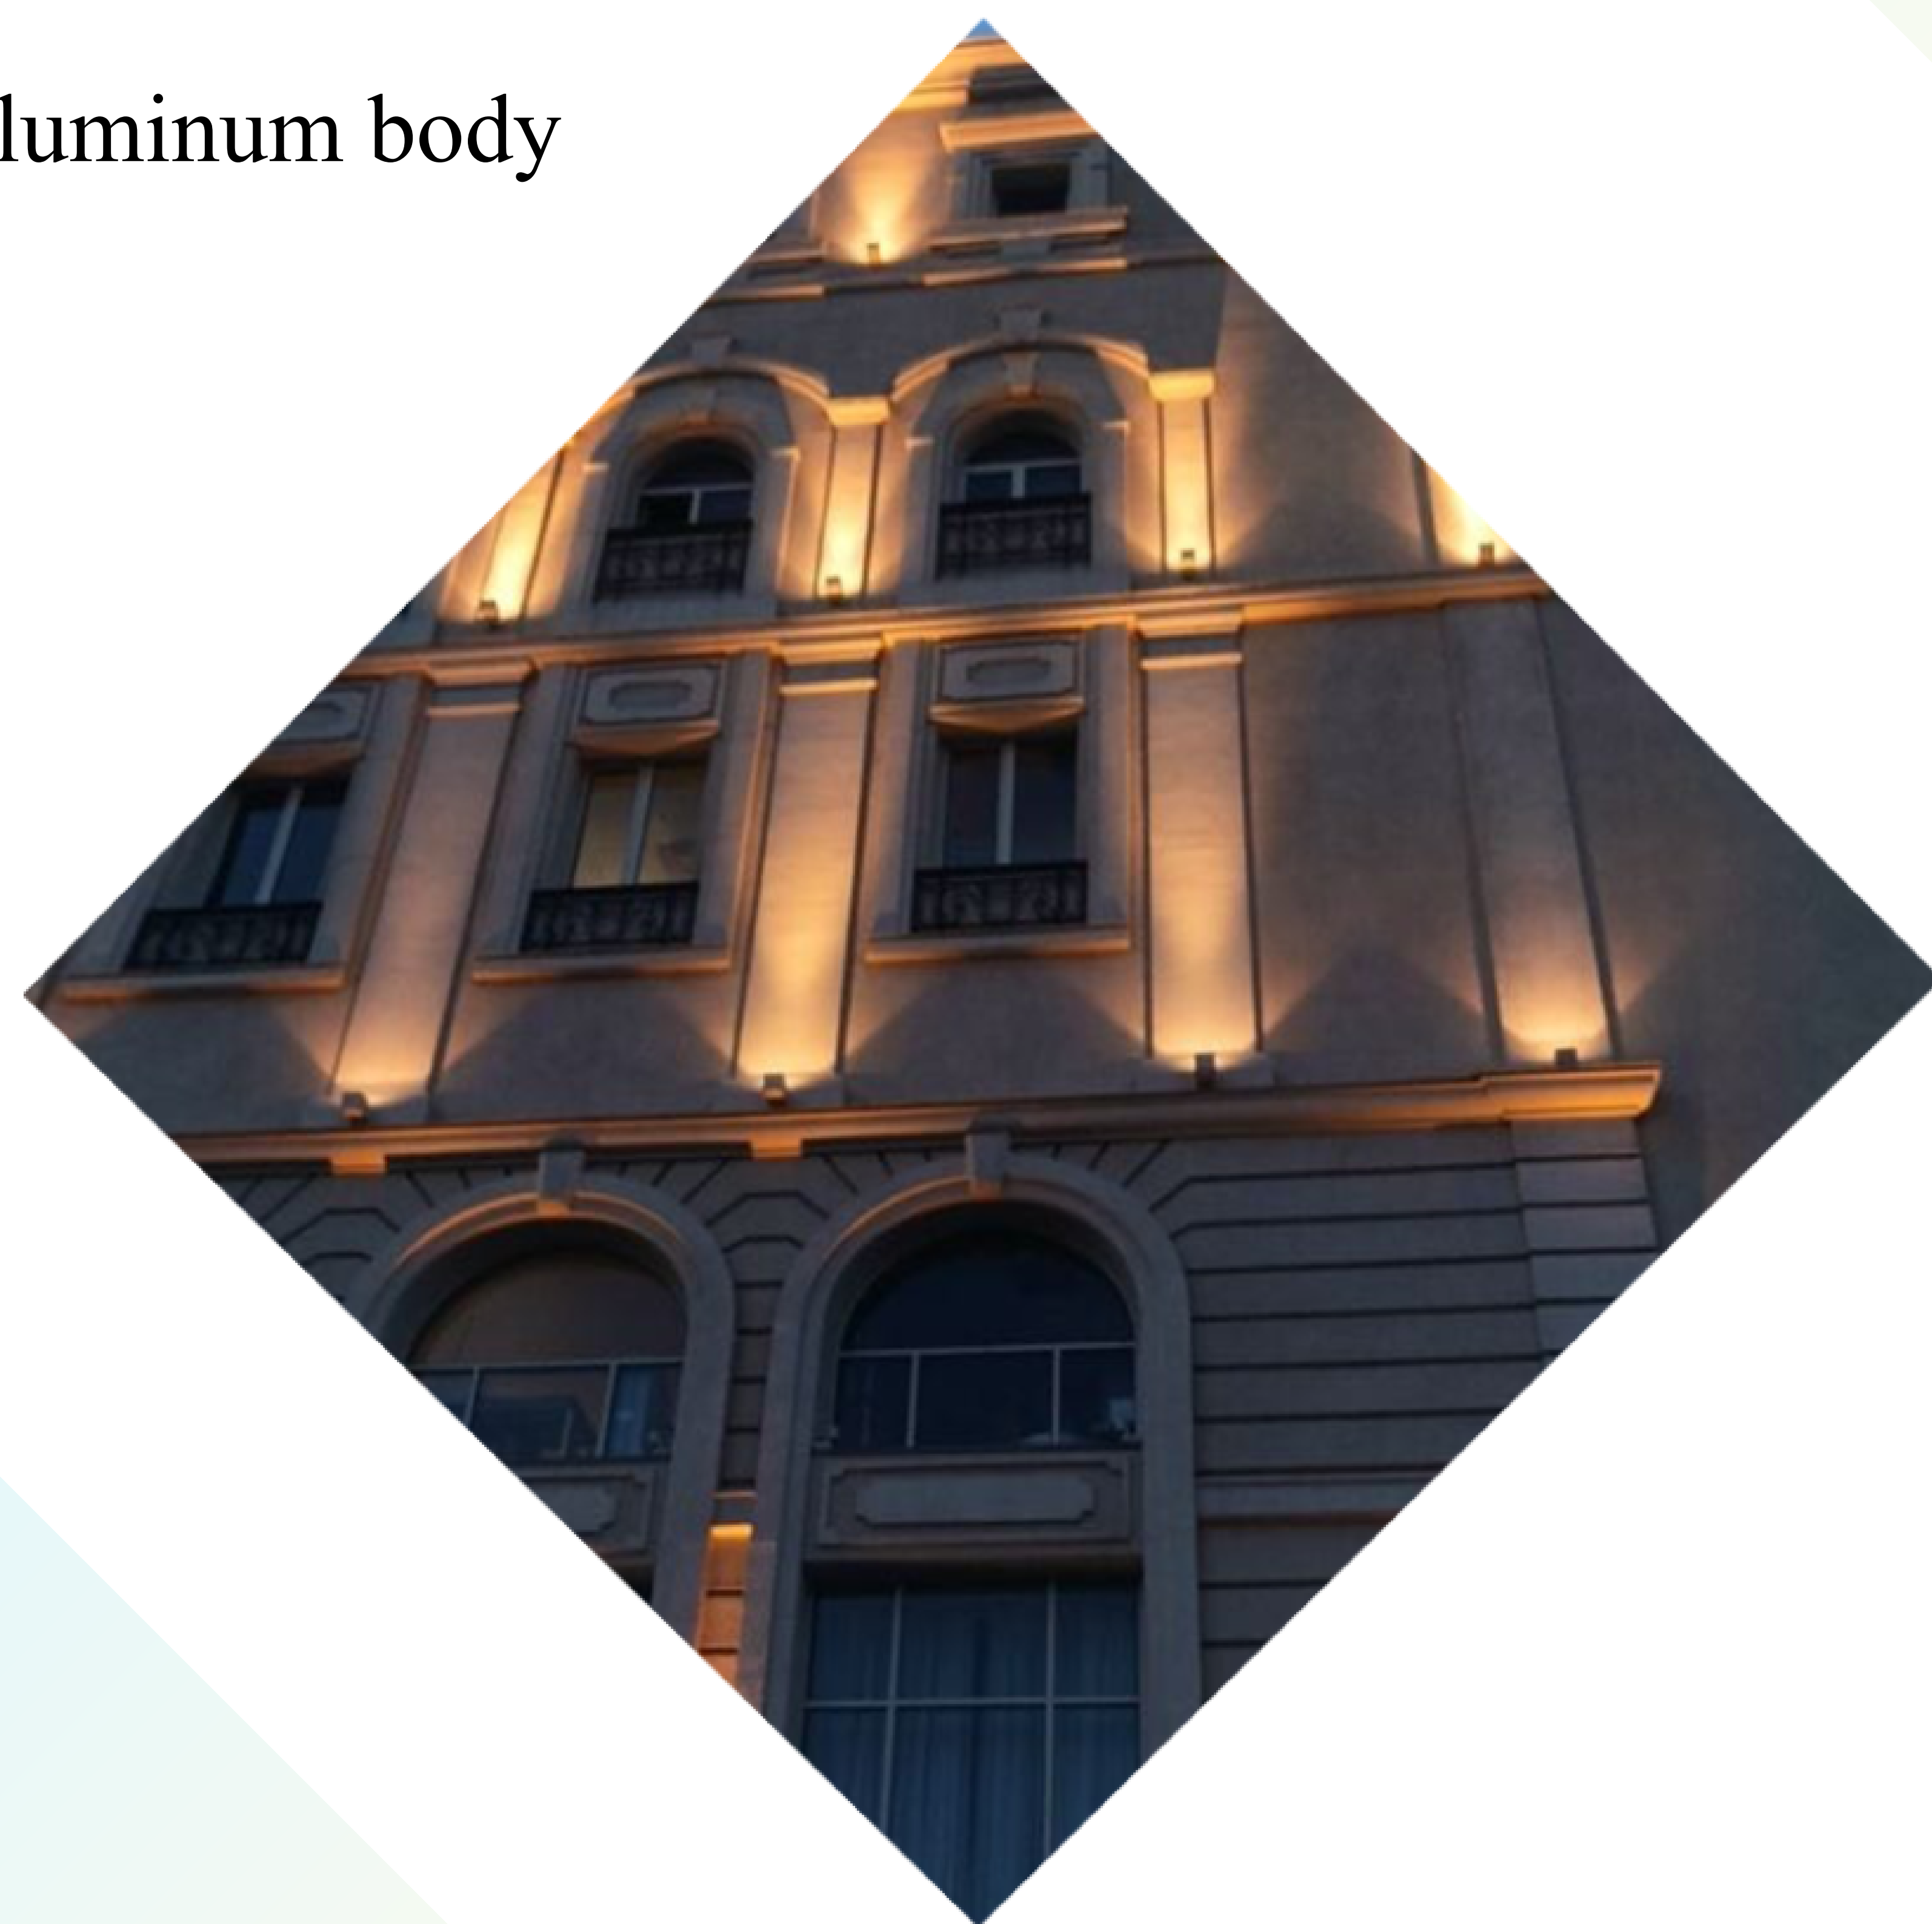

OPTICS

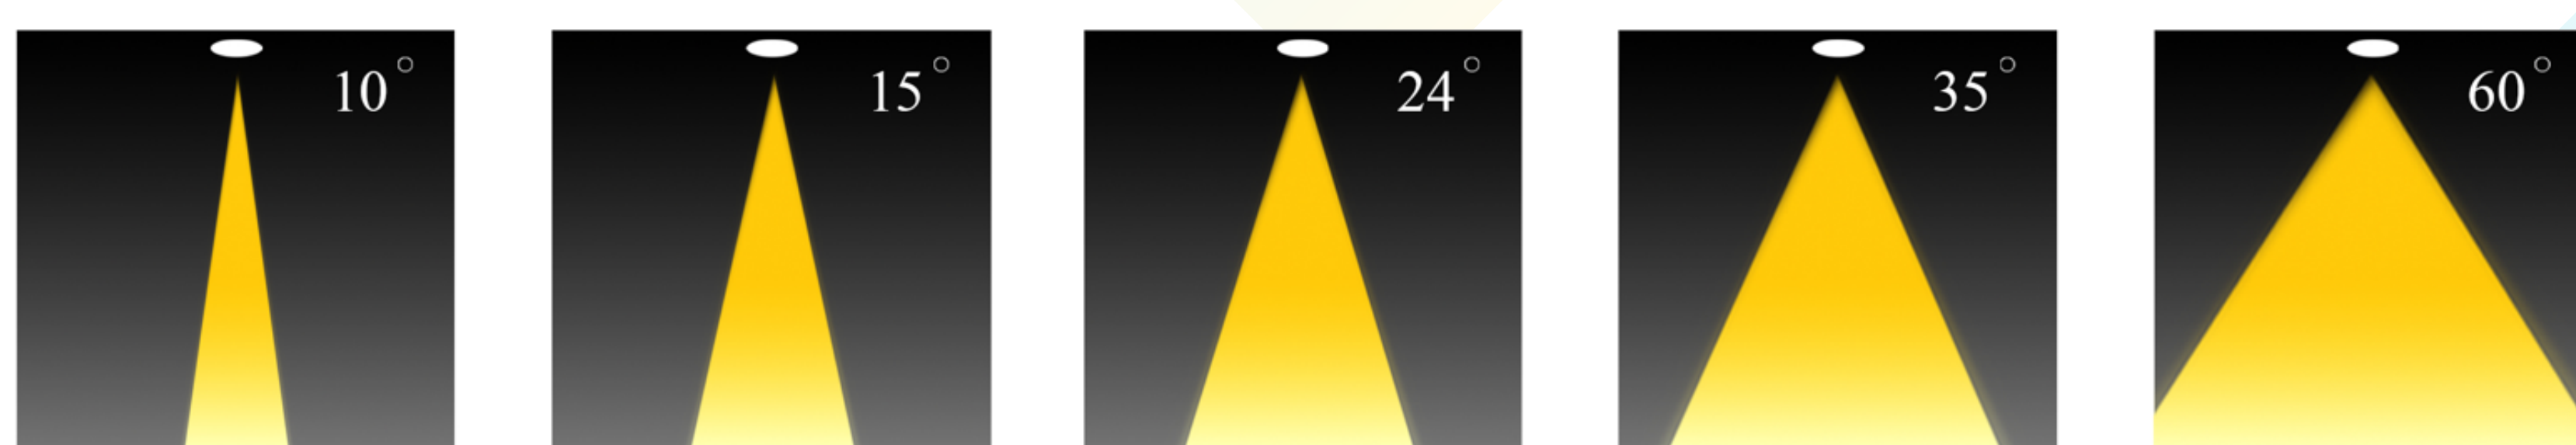

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	Lamp Base	Weight Kg
11273E27	9 12 15	90	3000 4000 6000	120x190x217 mm	N/A	E27	1.110

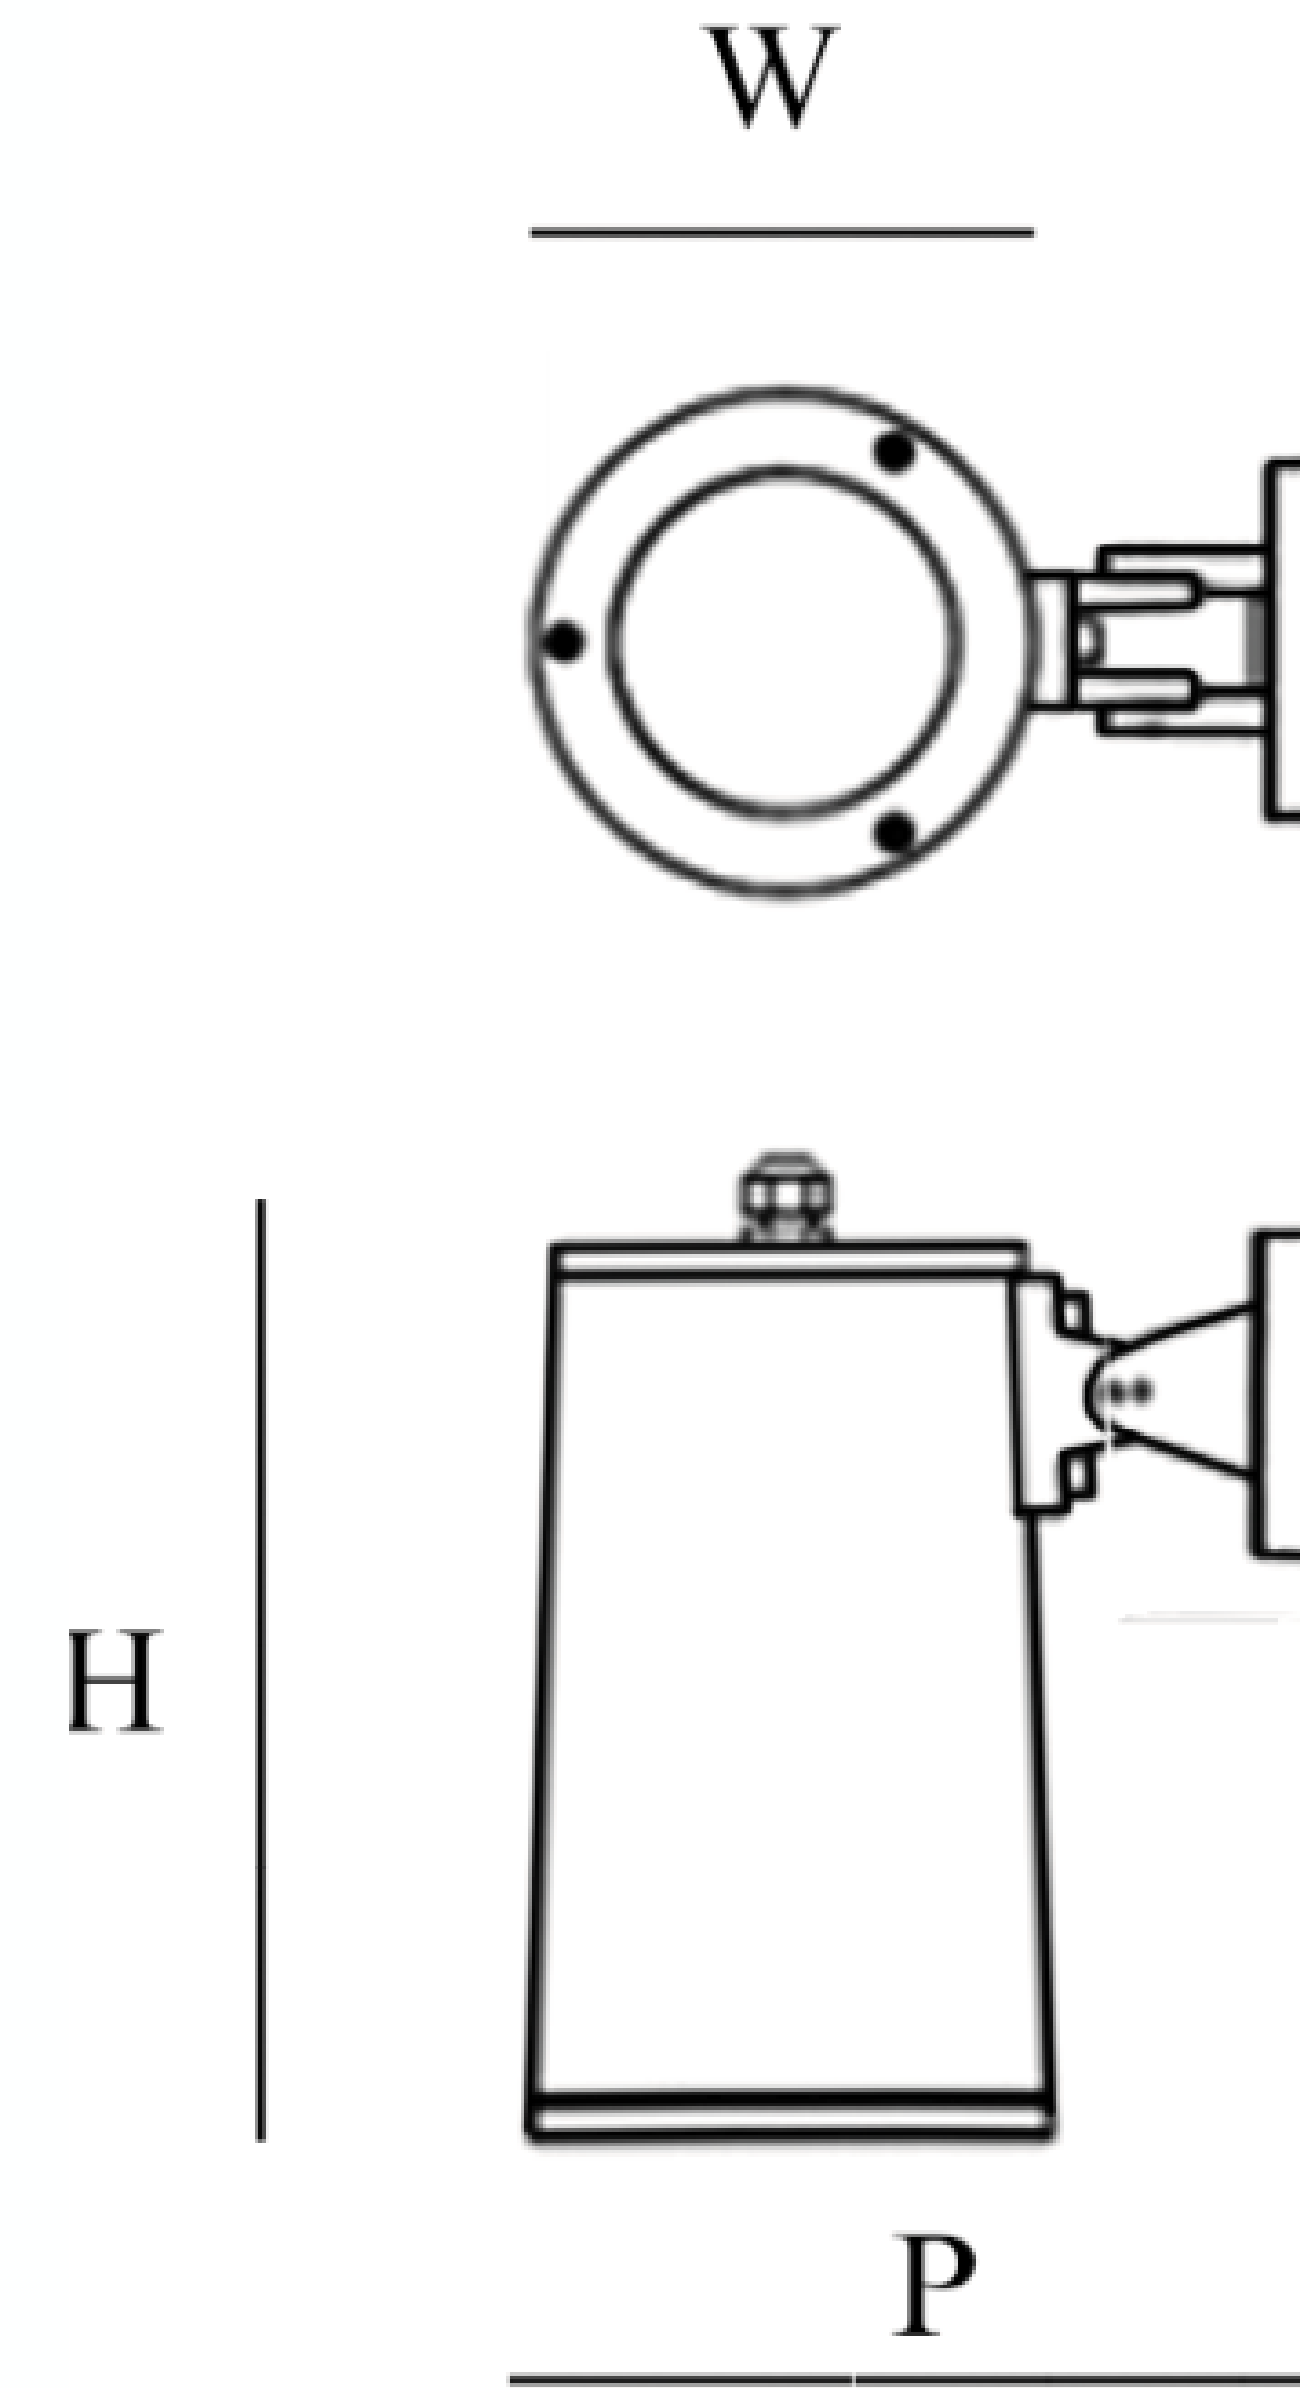

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

POLAR CURVE

