

Projector

SLT-1128



PERFORMANCE DATA

Efficacy : 79.8 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Optic : 24°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum and extruded Aluminum body


Mounting : Surface Wall light

Lens : Clear glass


Finish : Black

Protection Class : IP 65


Mechanical resistance : IK 08

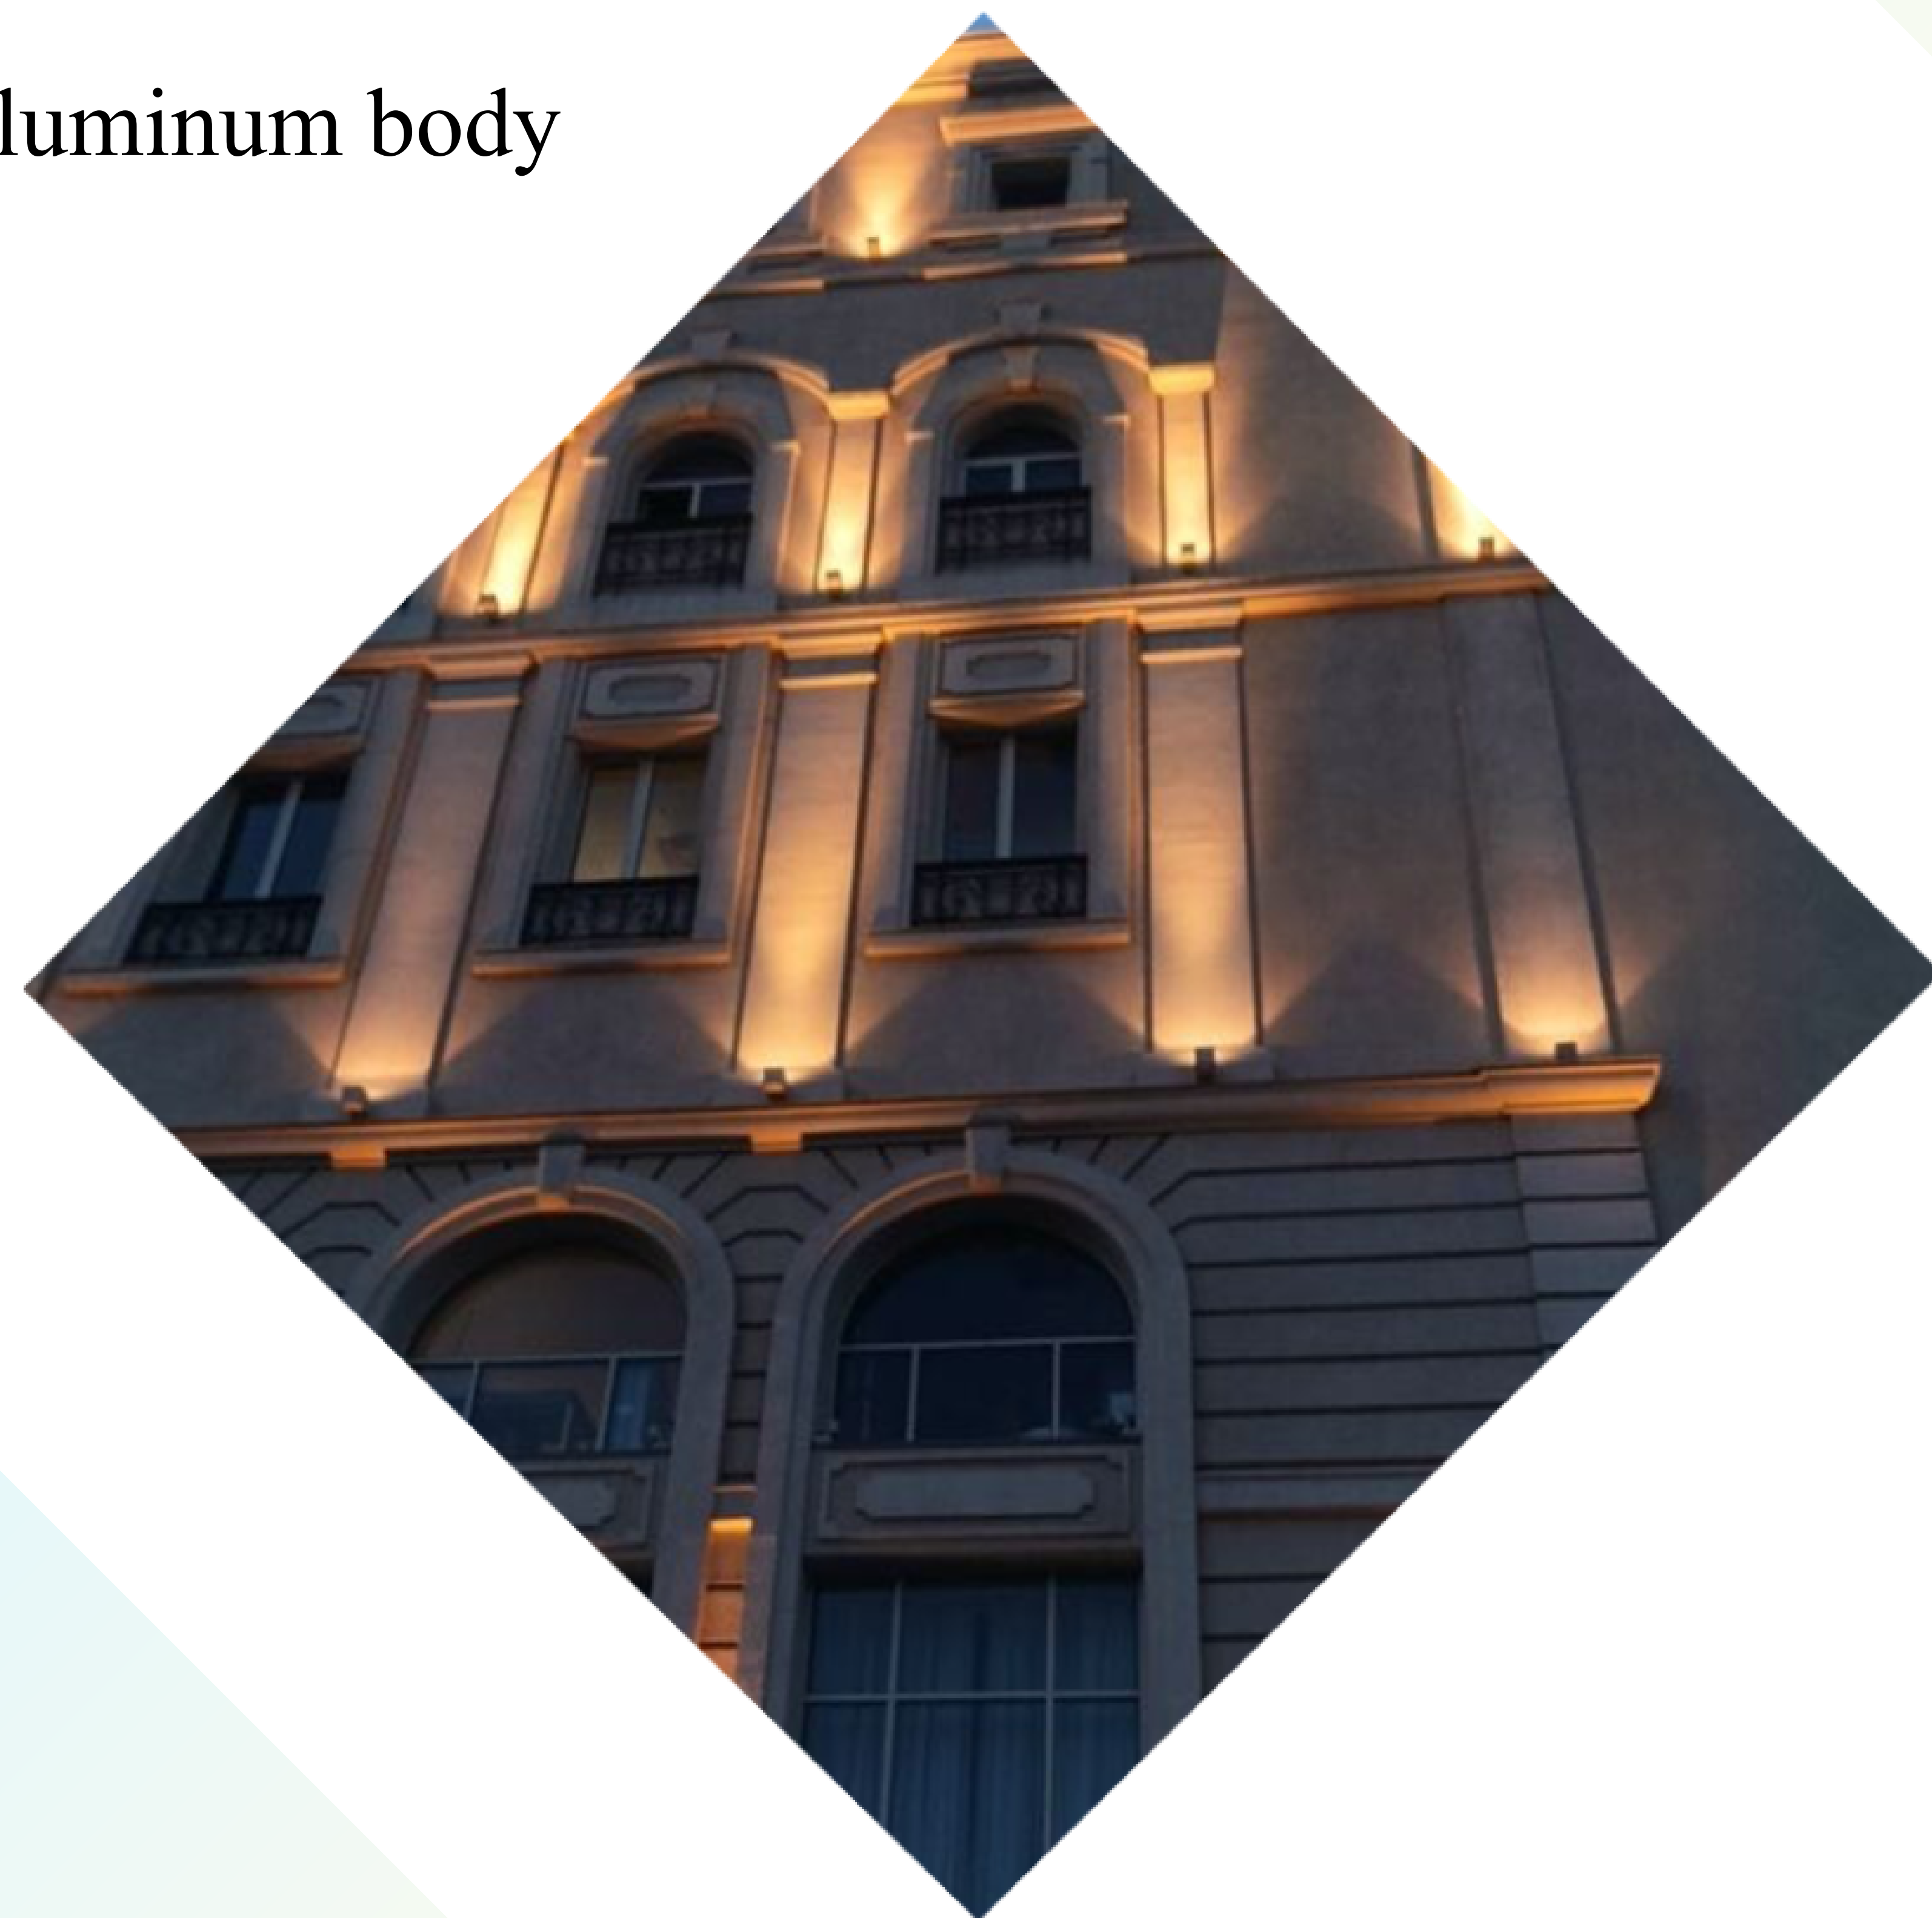

OPTICS

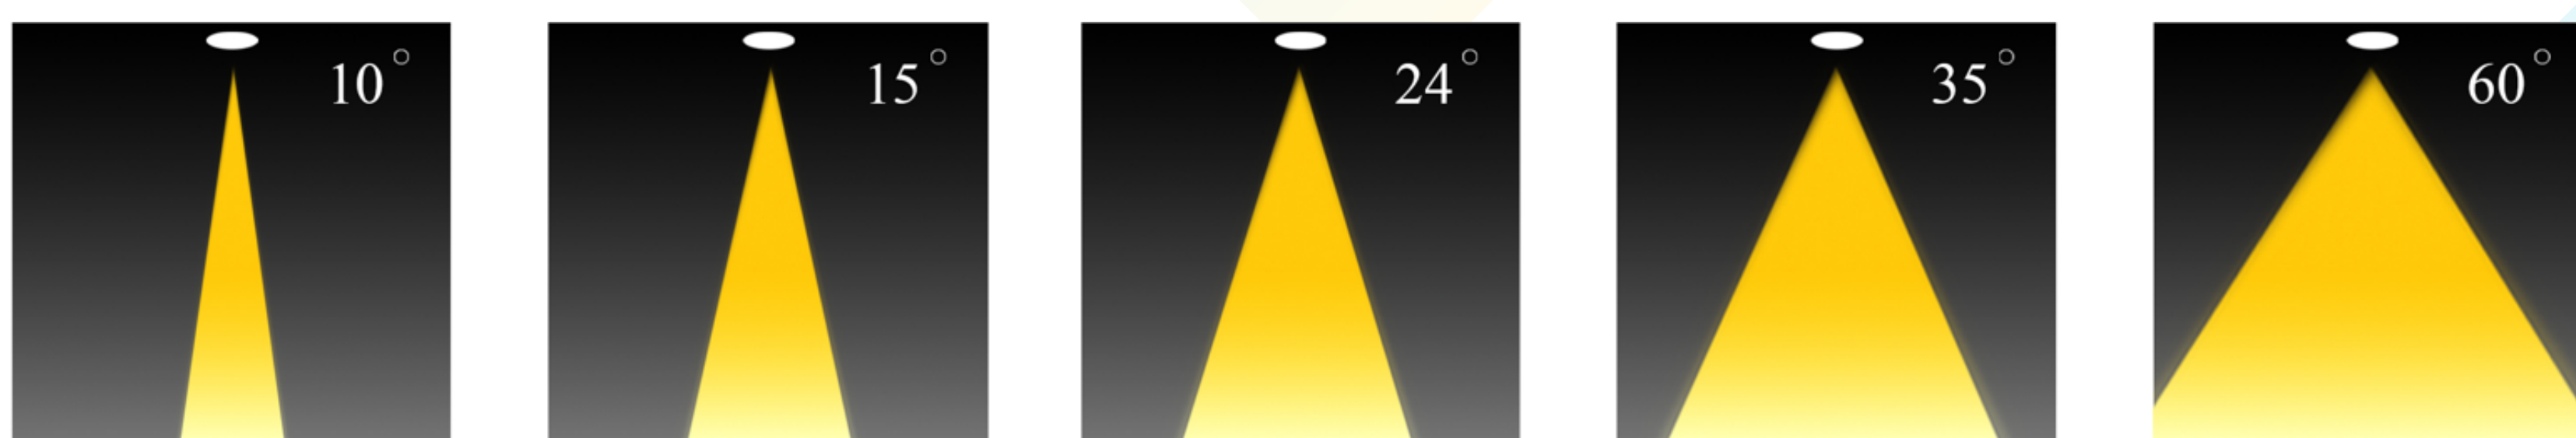

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
1128330X024CD015	15	79.8	3000	120x190x217 mm	Done	Cree	1.405

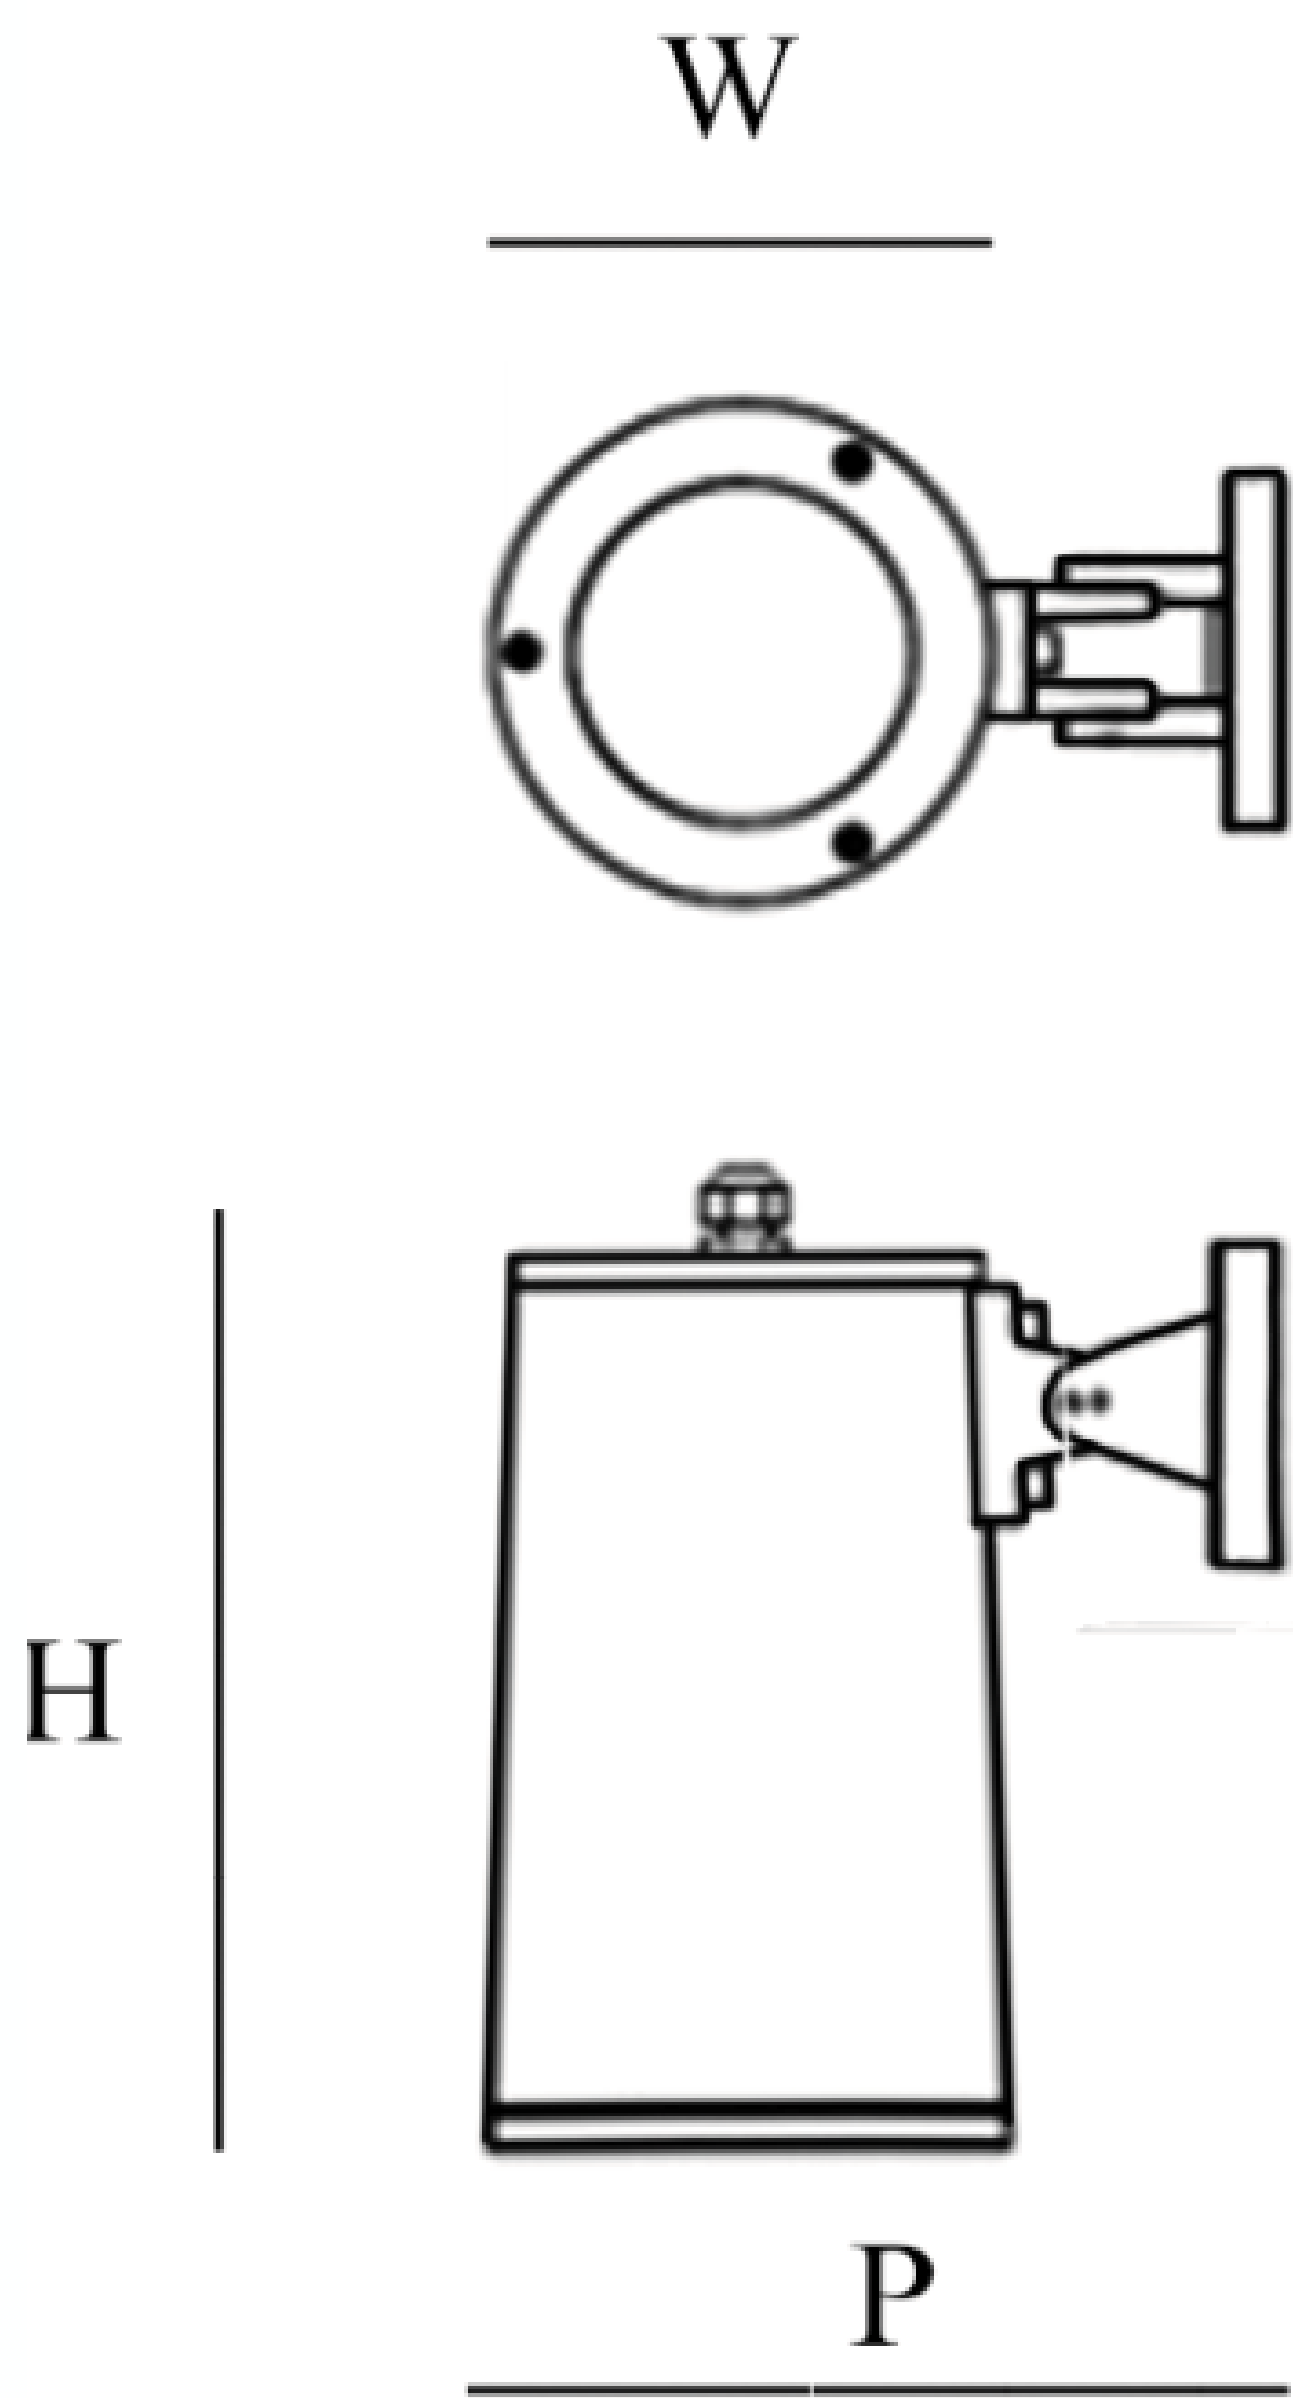

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

