

Wall Decortive

SLT-1130



PERFORMANCE DATA

Efficacy : 79.8Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Optic : 36°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum and extruded Aluminum body

Mounting : Surface mounted

Lens : Clear glass






Finish : Gray RAL 7016

Protection Class : IP 65


Mechanical resistance : IK 08



OPTICS

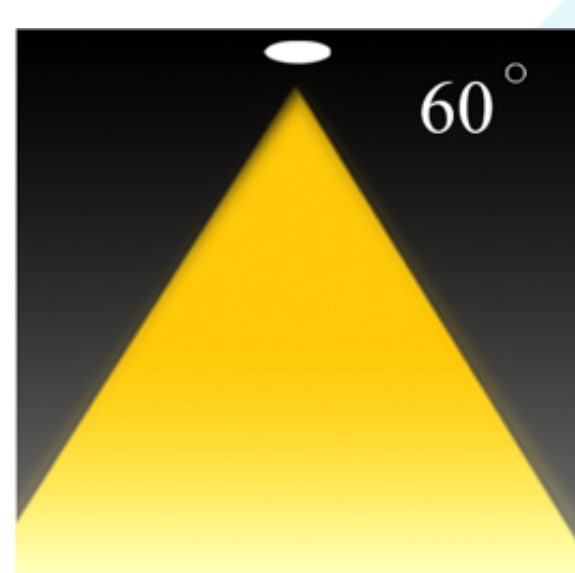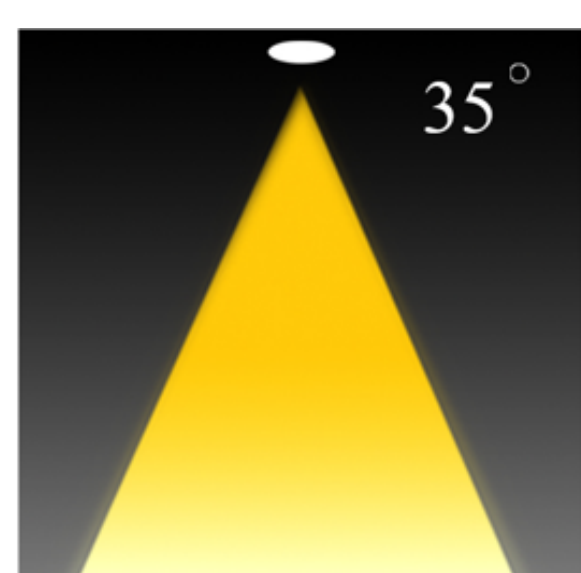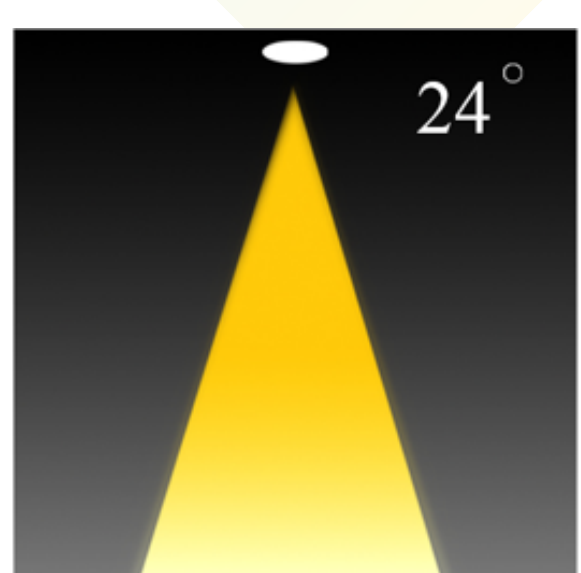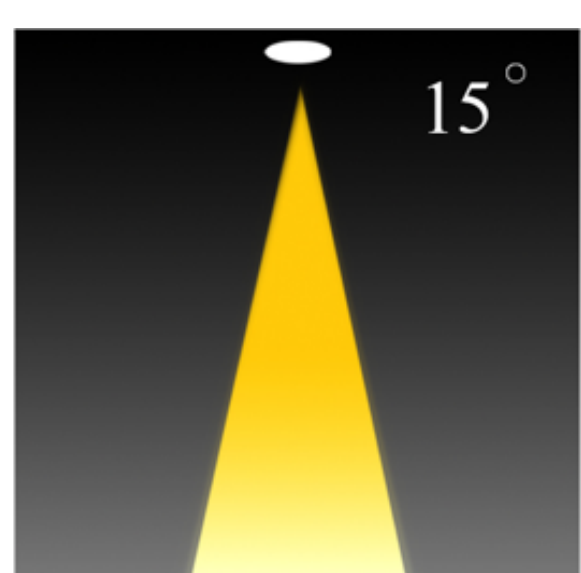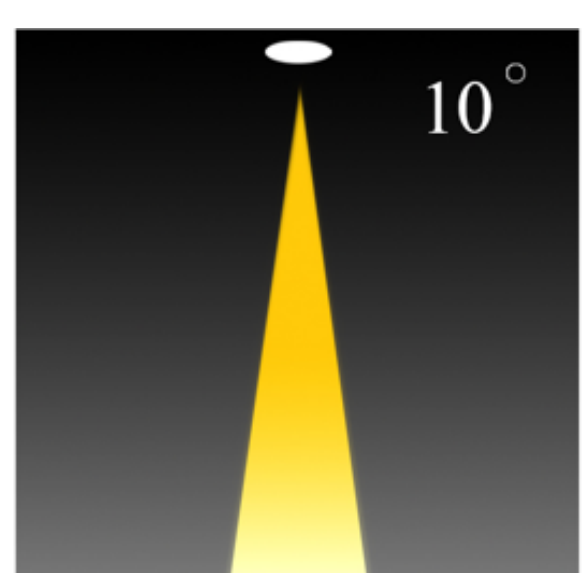

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
1130330X036CD015	15	79.8	3000	110x157x218 mm	Done	Cree	1.500

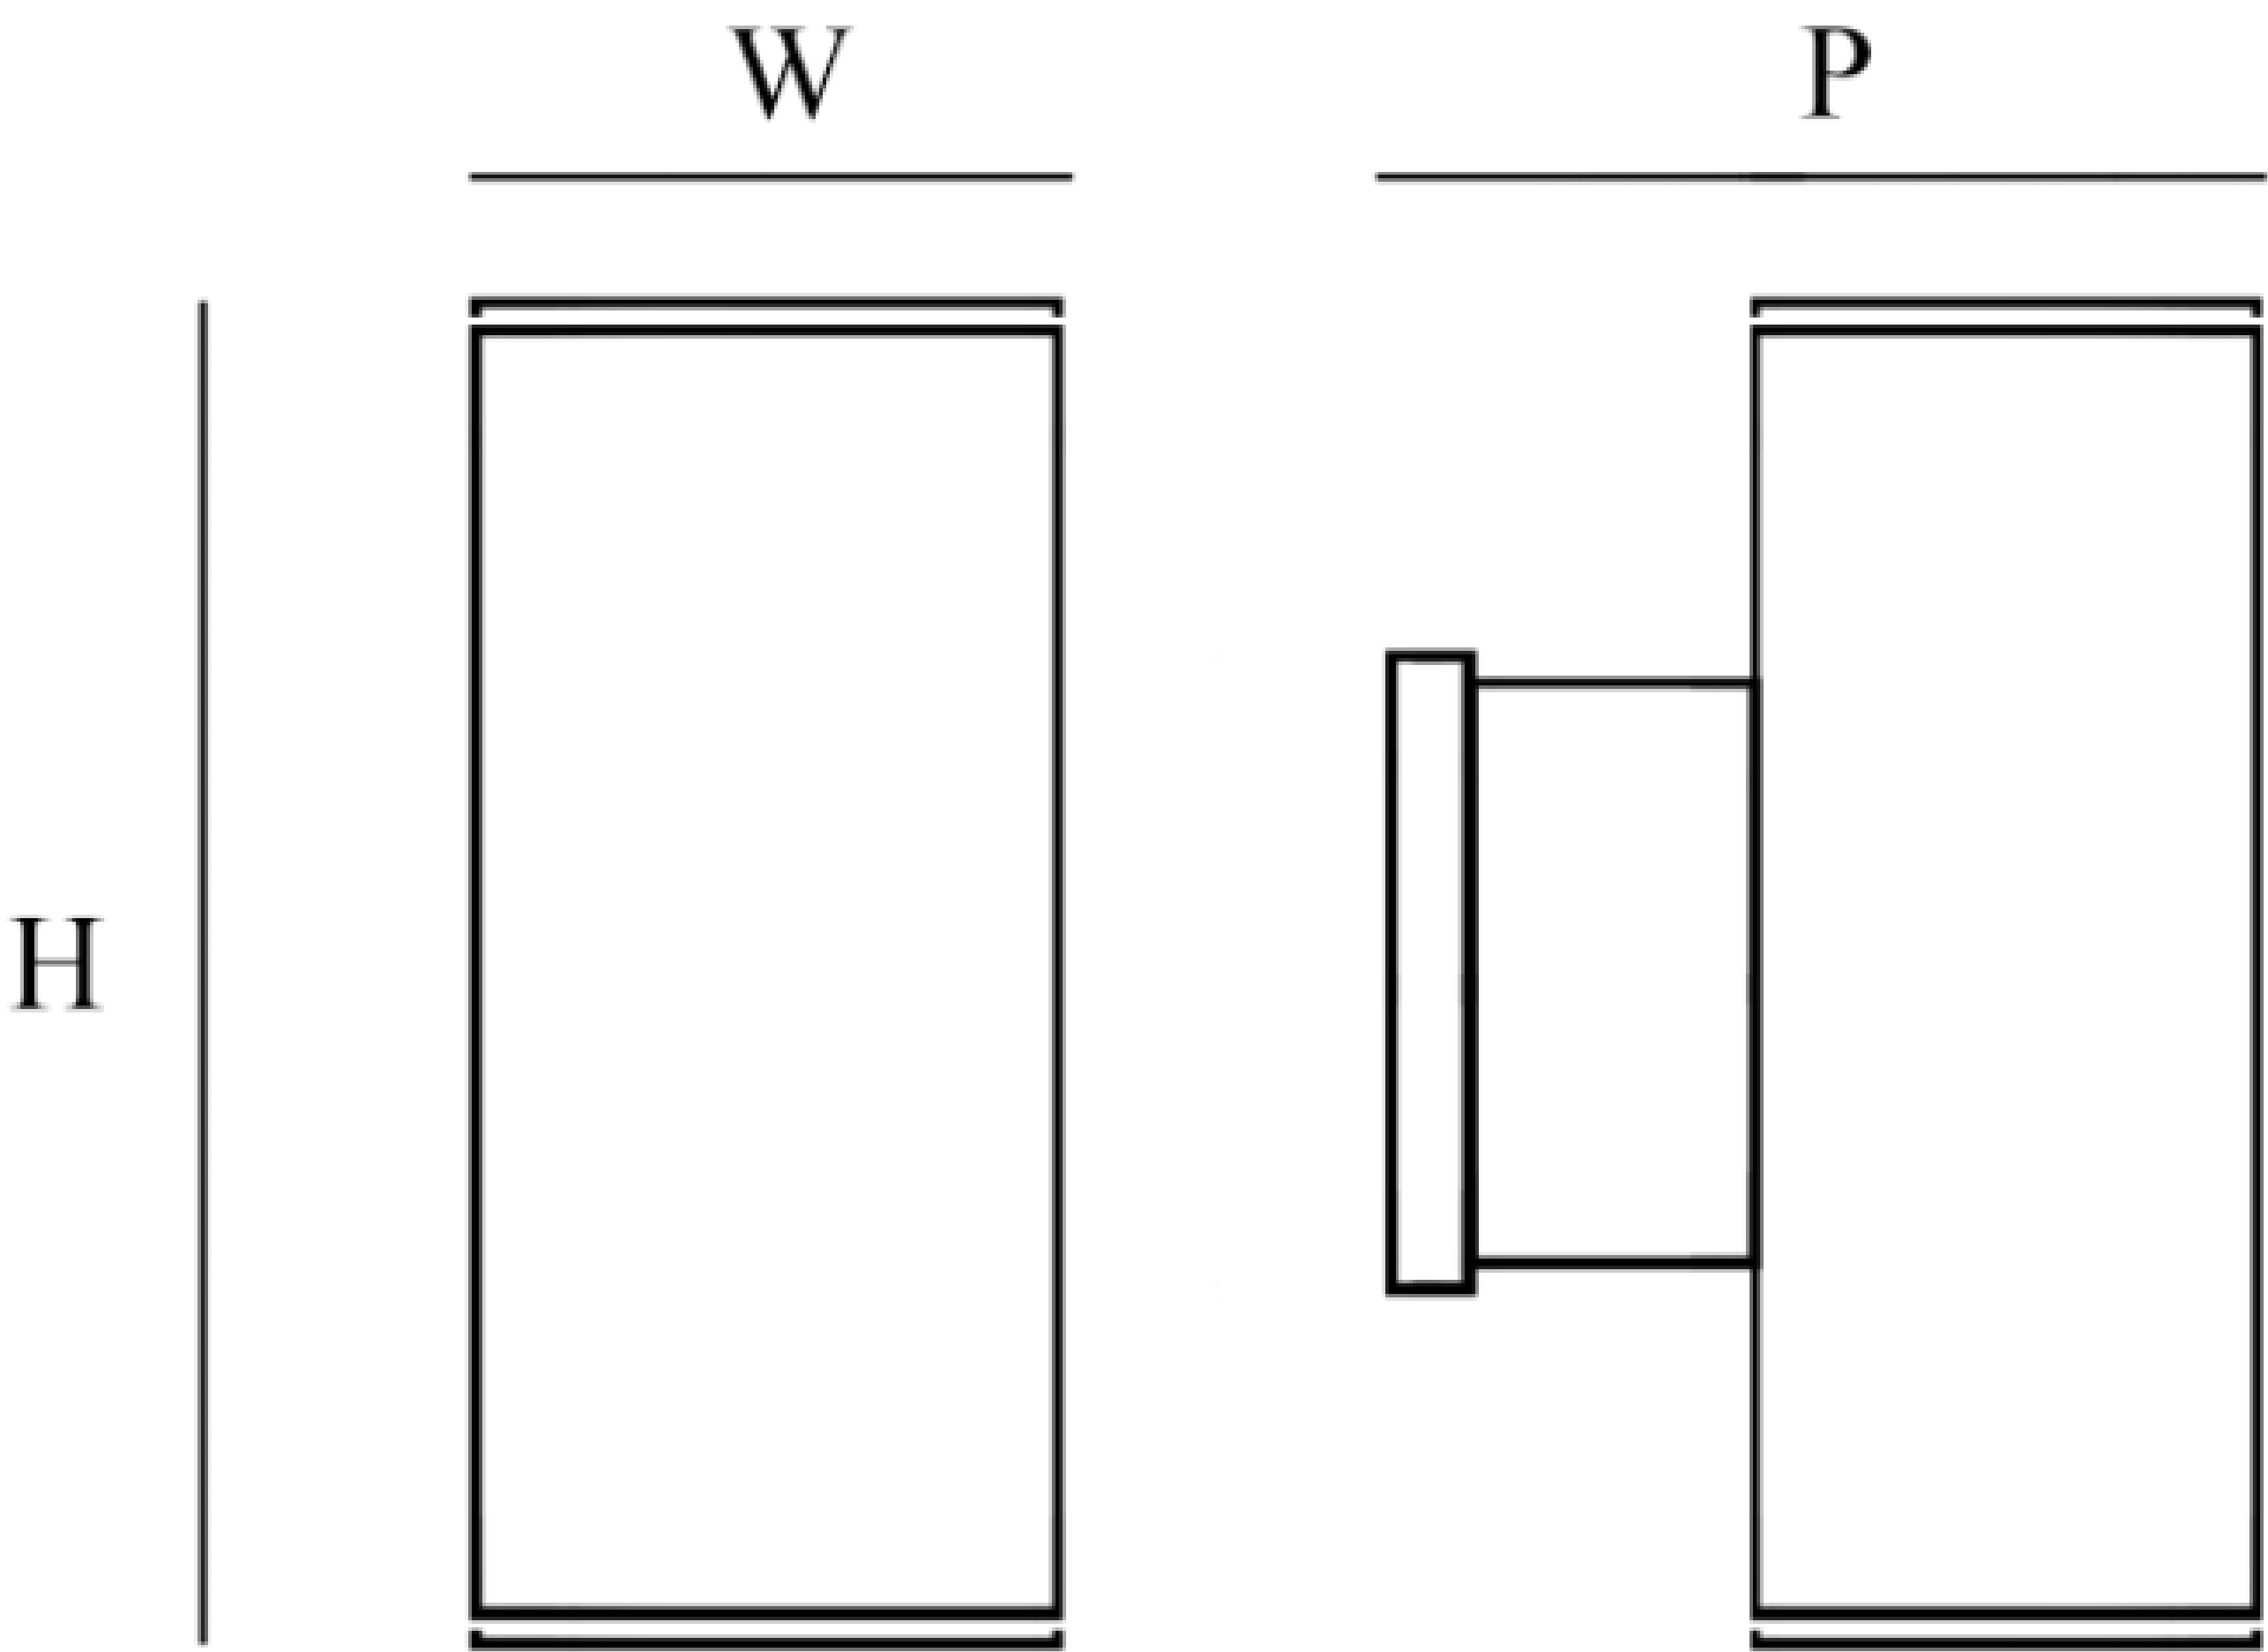

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

POLAR CURVE

