


linear Aluminum profile

SLT-1206

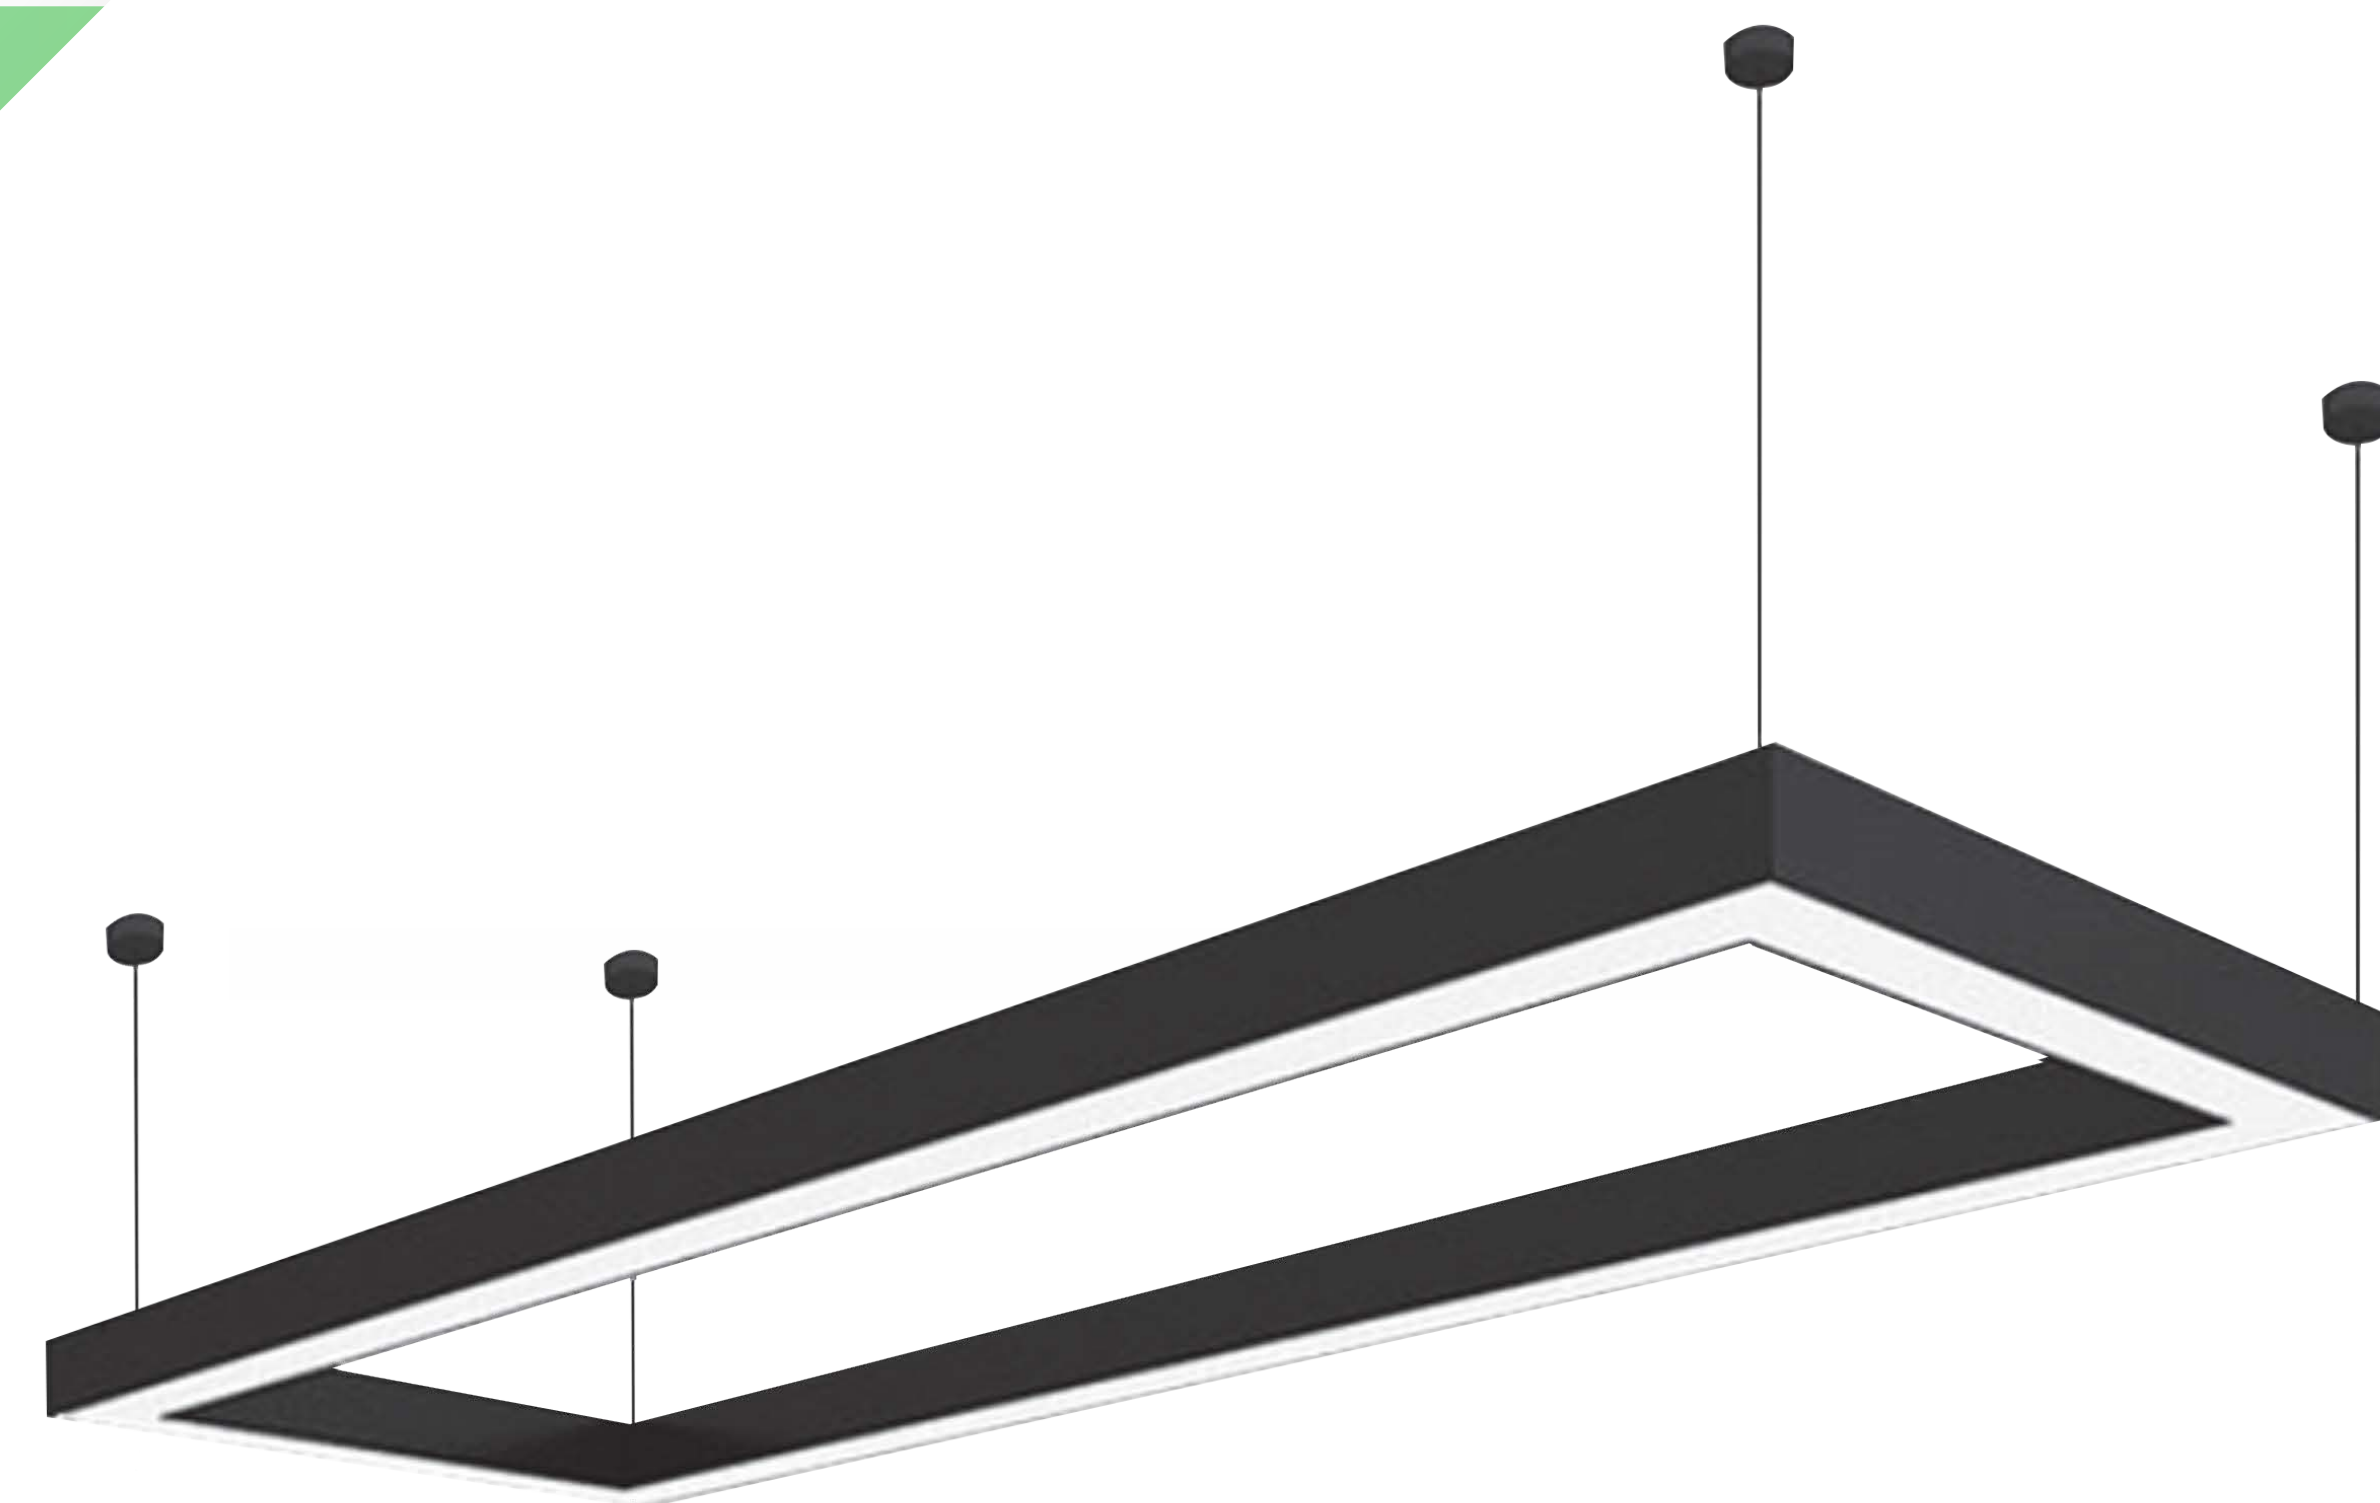

PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : AC85-265V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : suspended,surface

Lens : Polycarbonate


Finish : White / Black

Protection Class : IP 40



Mechanical Resistance : IK 03



OPTICS

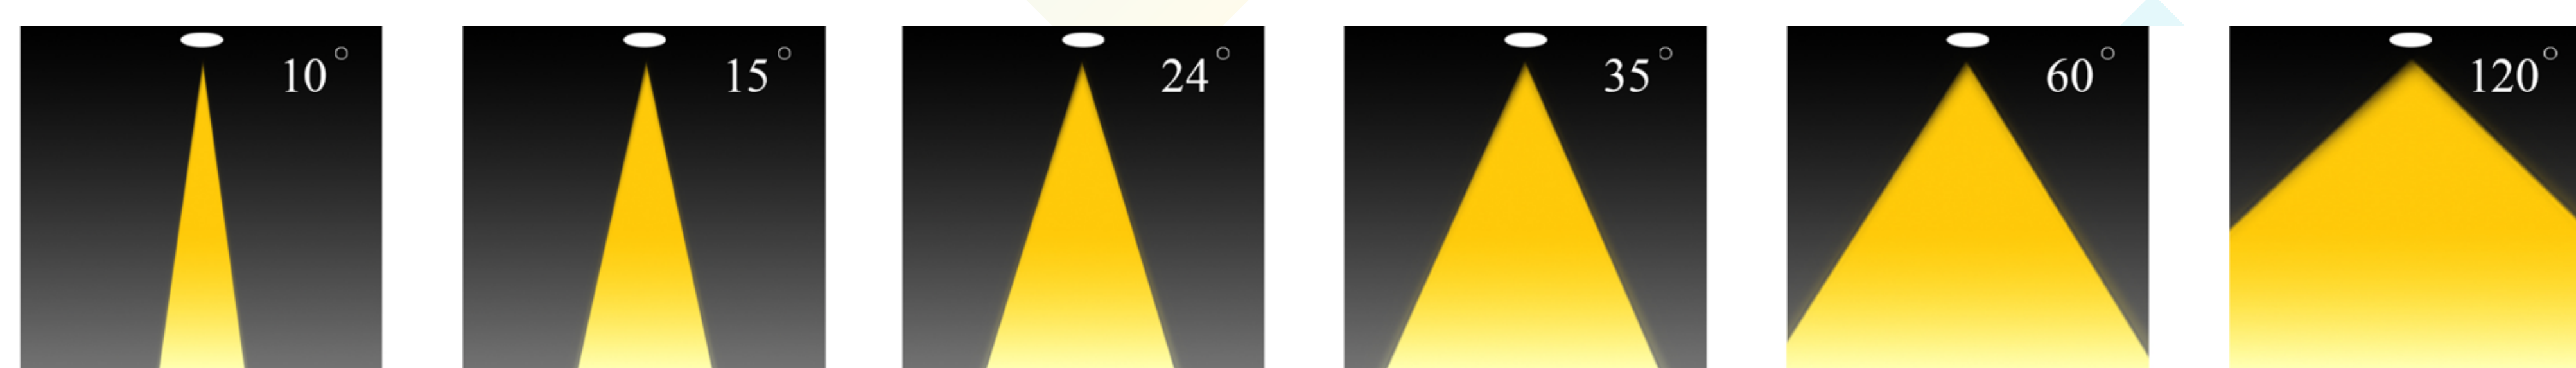

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxB mm	Driver	LED Chip	Weight
1206X408120OD120	120	130	4000	1200x600 mm	Done	Osram	

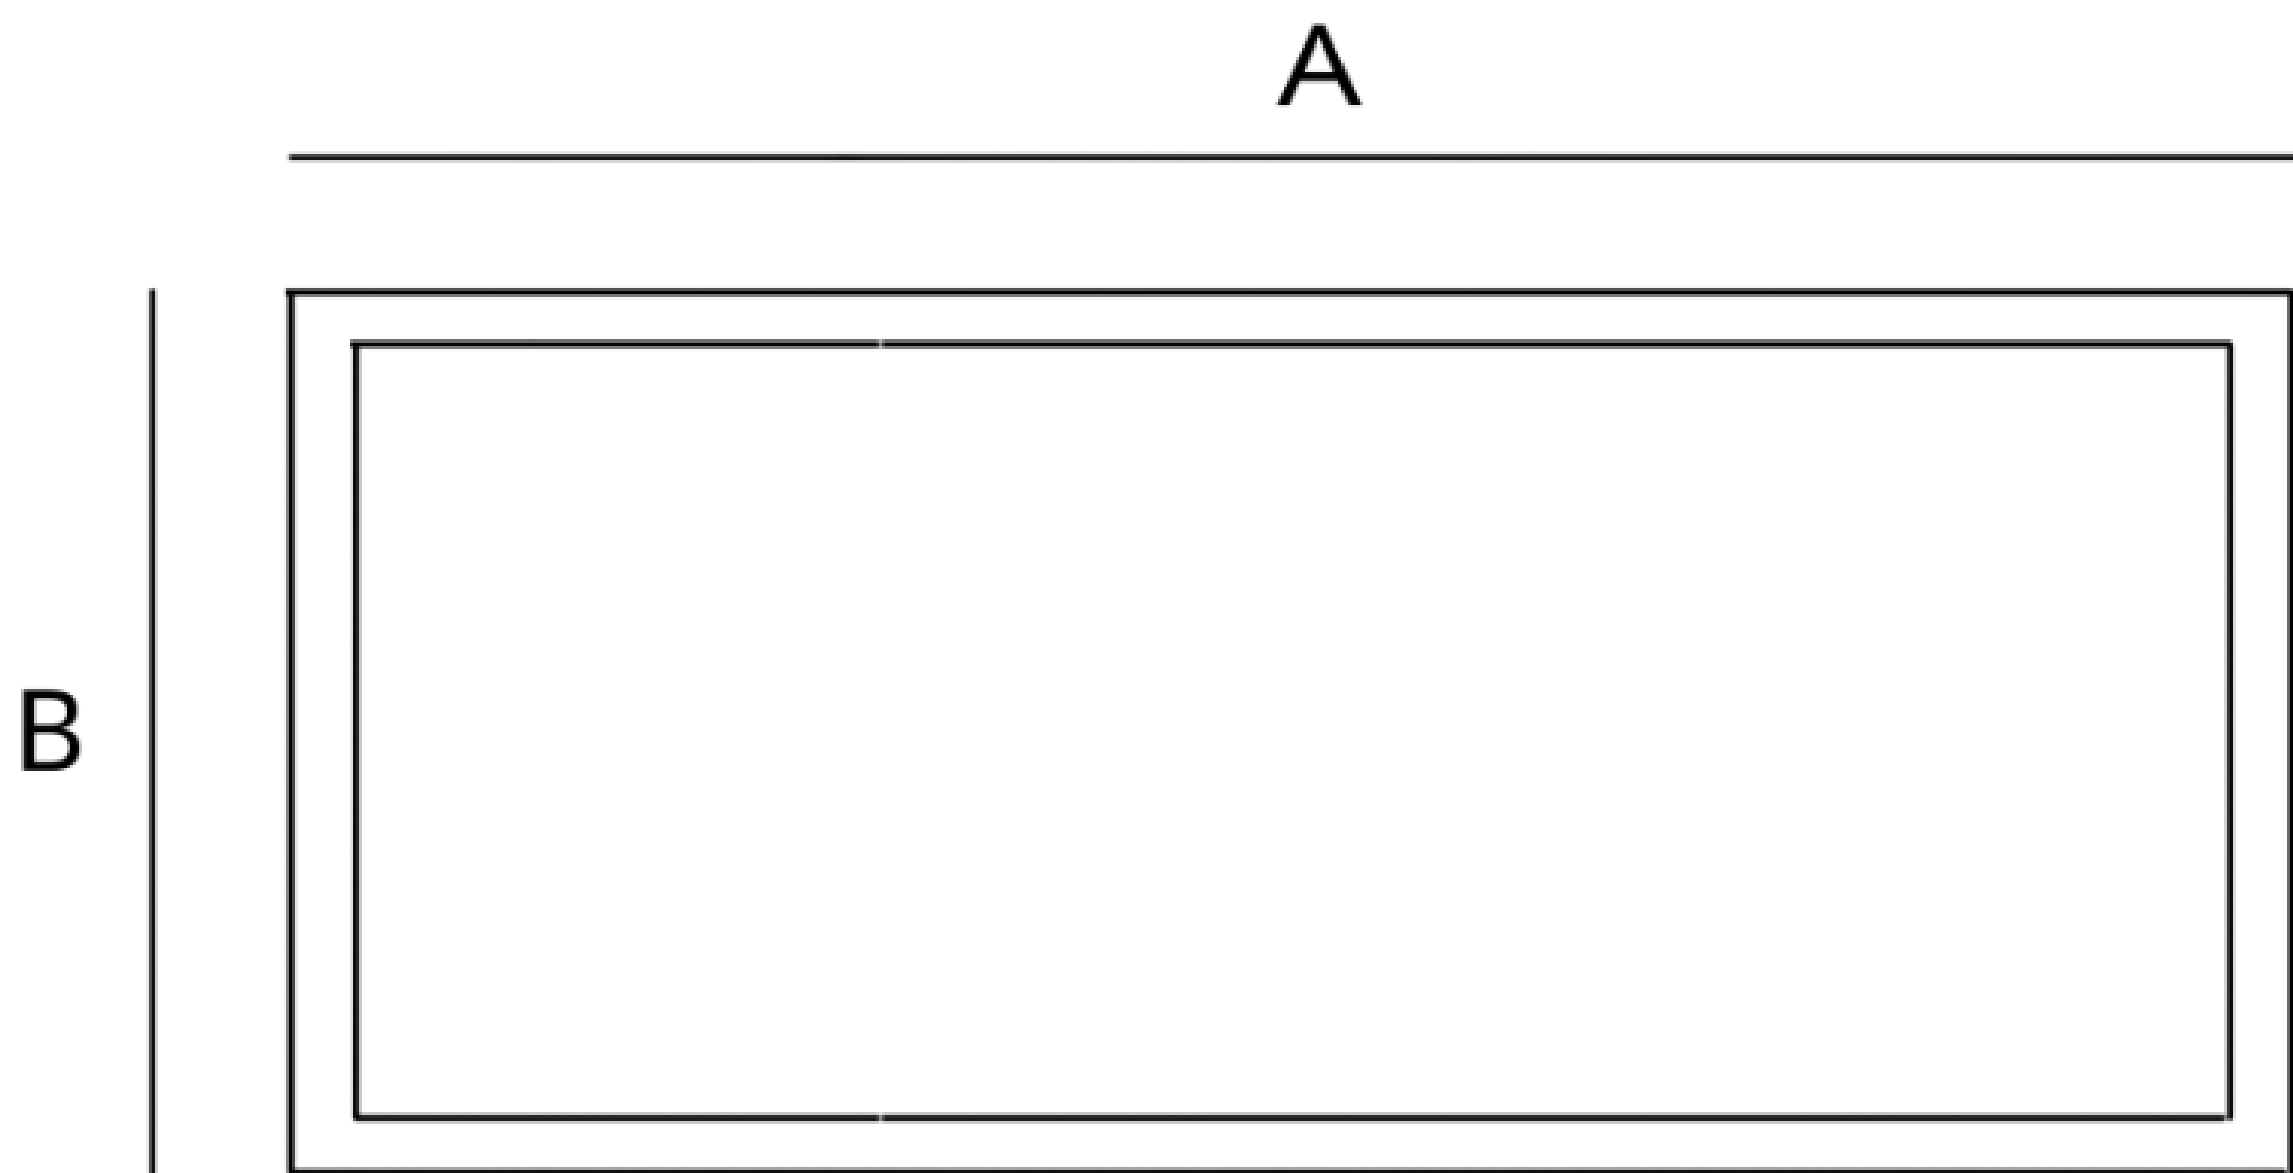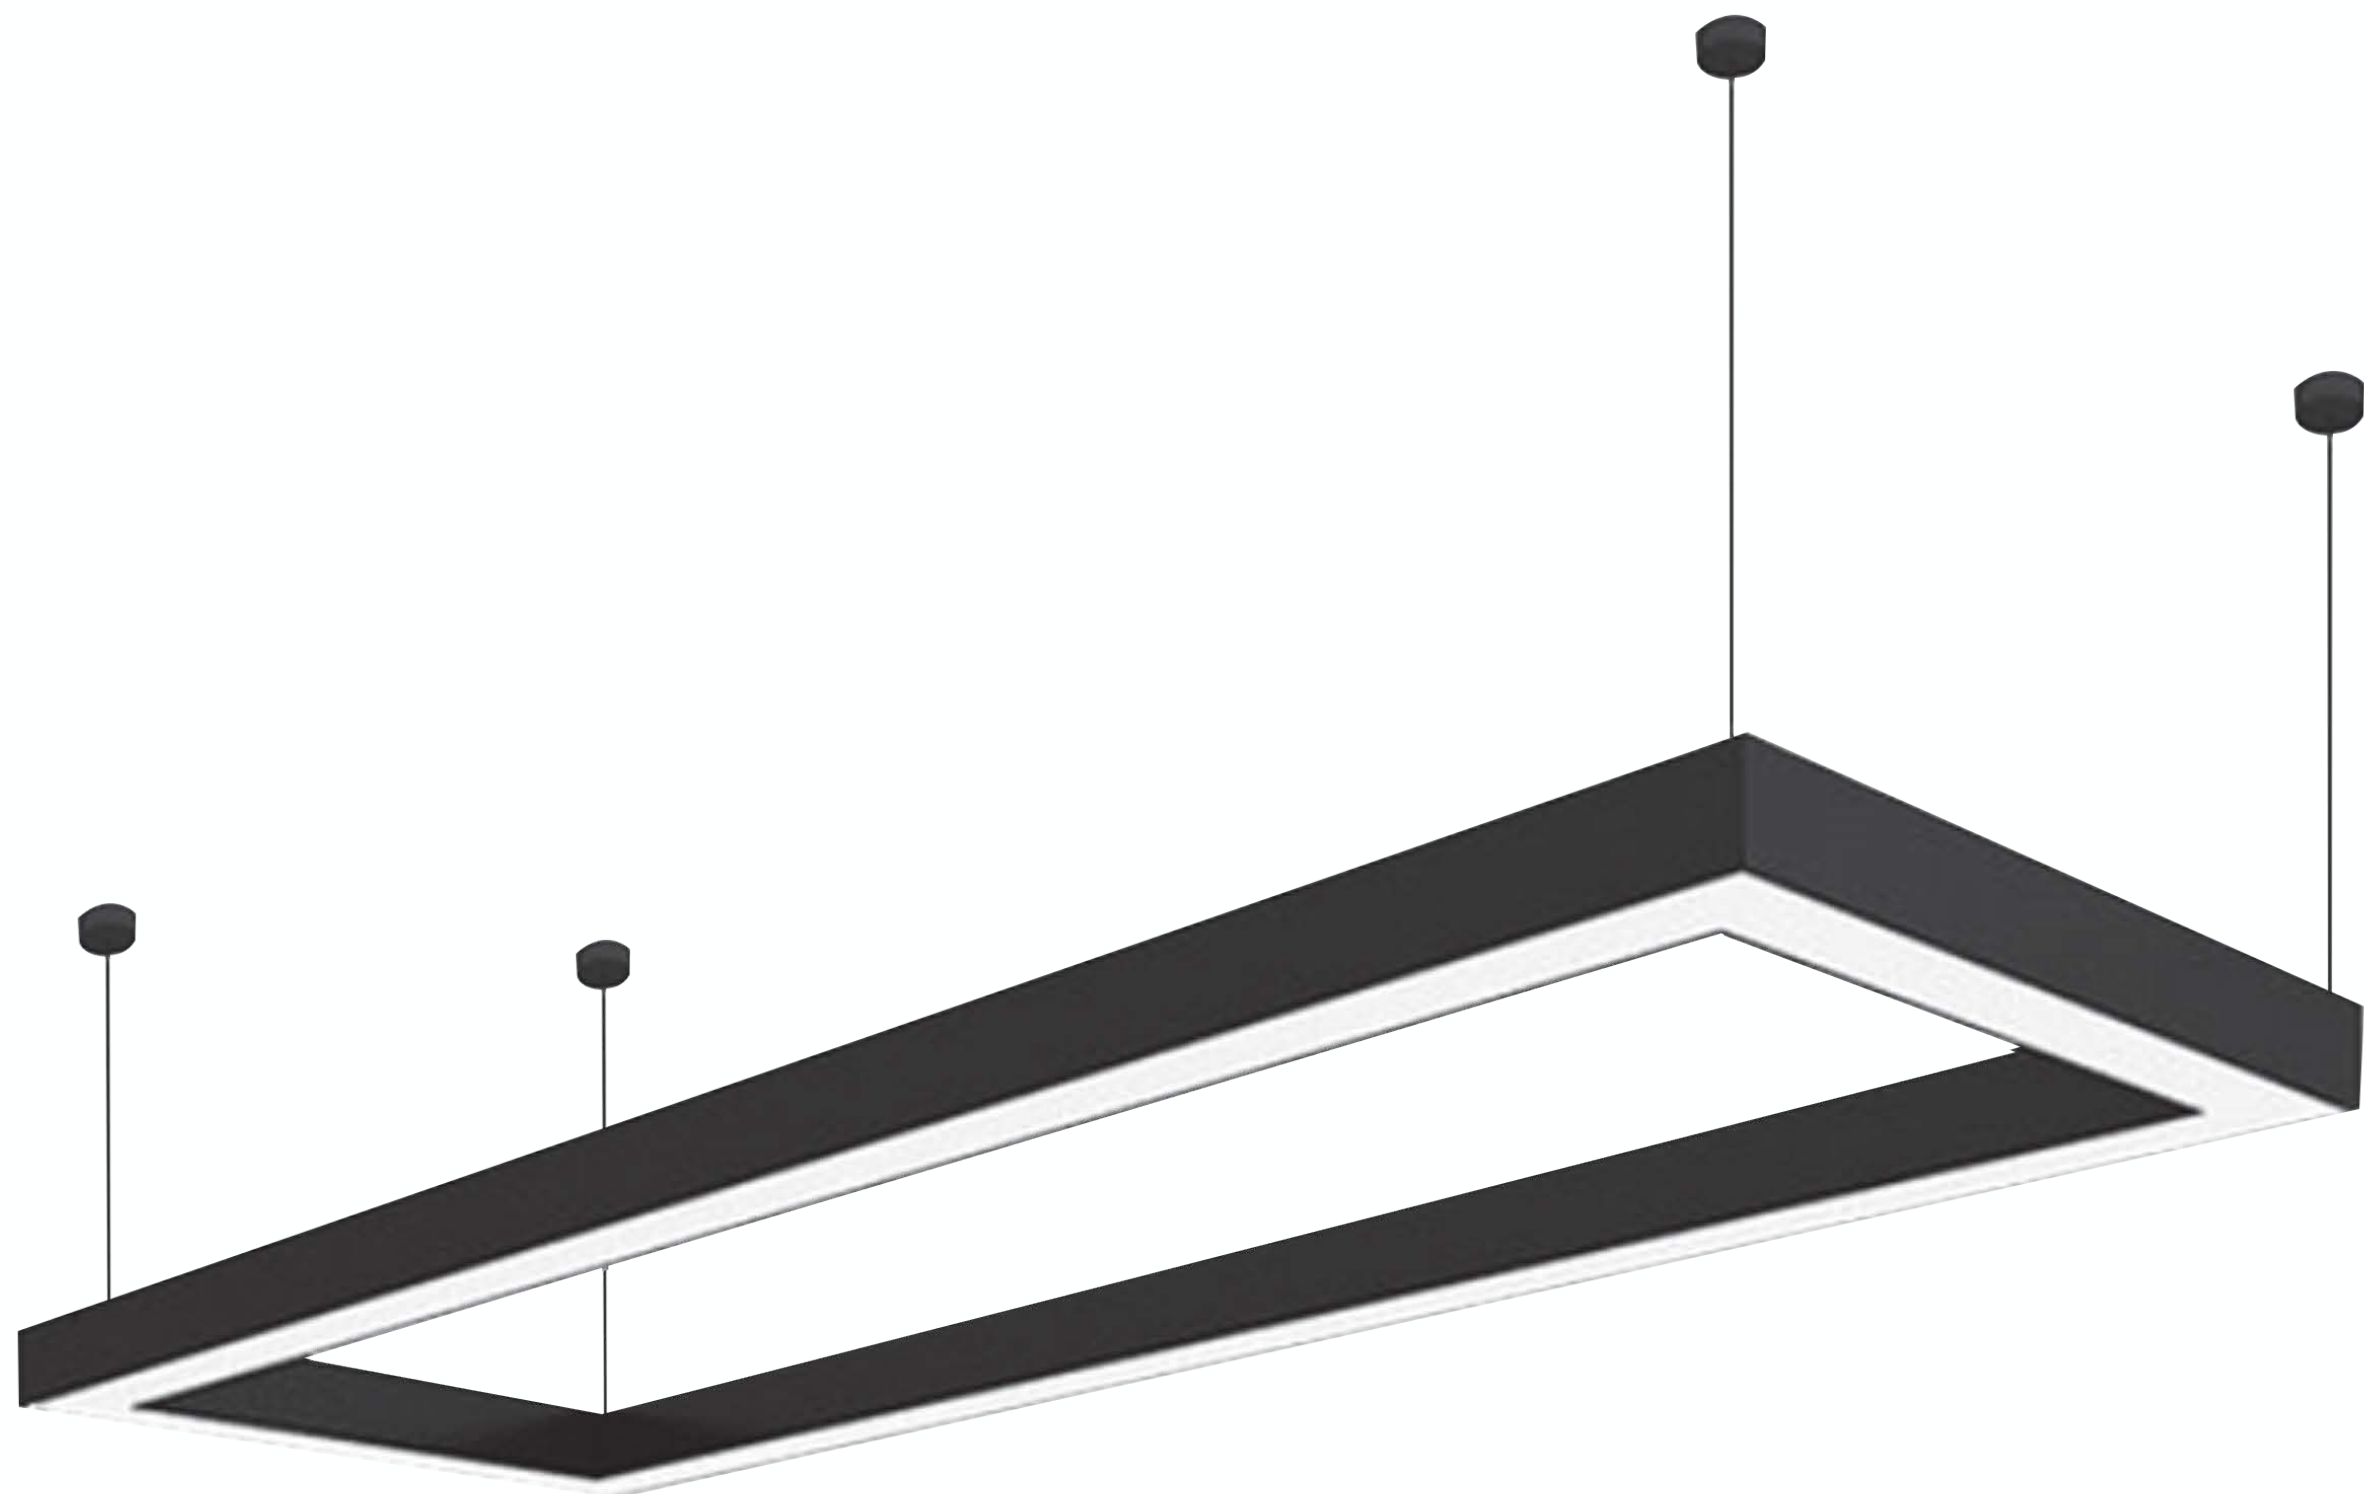

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

FINISH

White Gray

DALI

POLAR CURVE

