

# Plafonira

SLT-2415



## PERFORMANCE DATA

**Efficacy :** 95 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 4000K

**Life Time :** 50.000 hrs

**Optic :** 110 °

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Polycarbonate Body & Opal diffuser

**Mounting :** Surface / Wall Mounted

**Lens :** Opal


**Finish :** White

**Protection Class :** IP 66


**Mechanical Resistance :** IK 08



## OPTICS

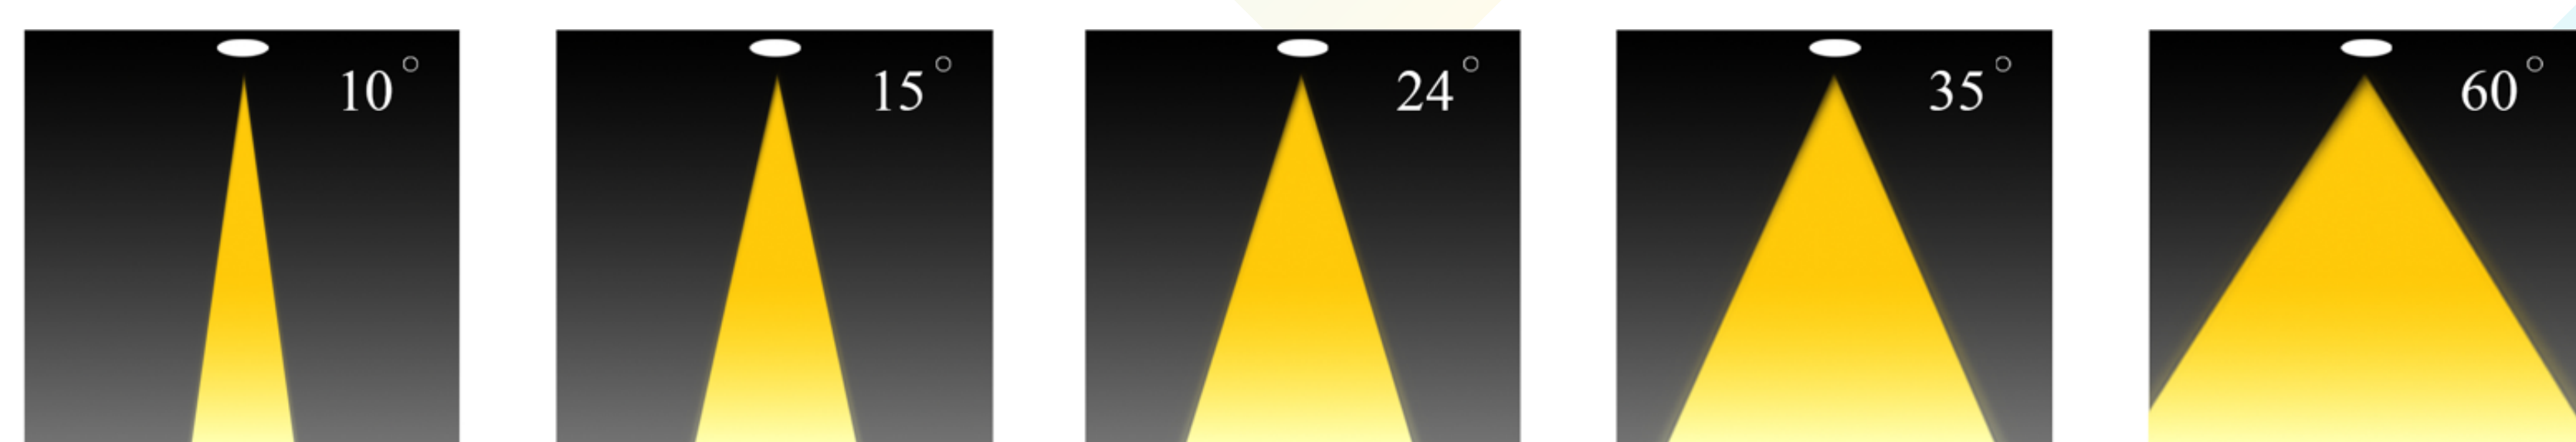

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxP mm	Driver	LED Chip	Weight
24151XXXXXXOTXXX	10 15 20 24	95	3000 4000	260x87 mm	Osram	Tridonic	

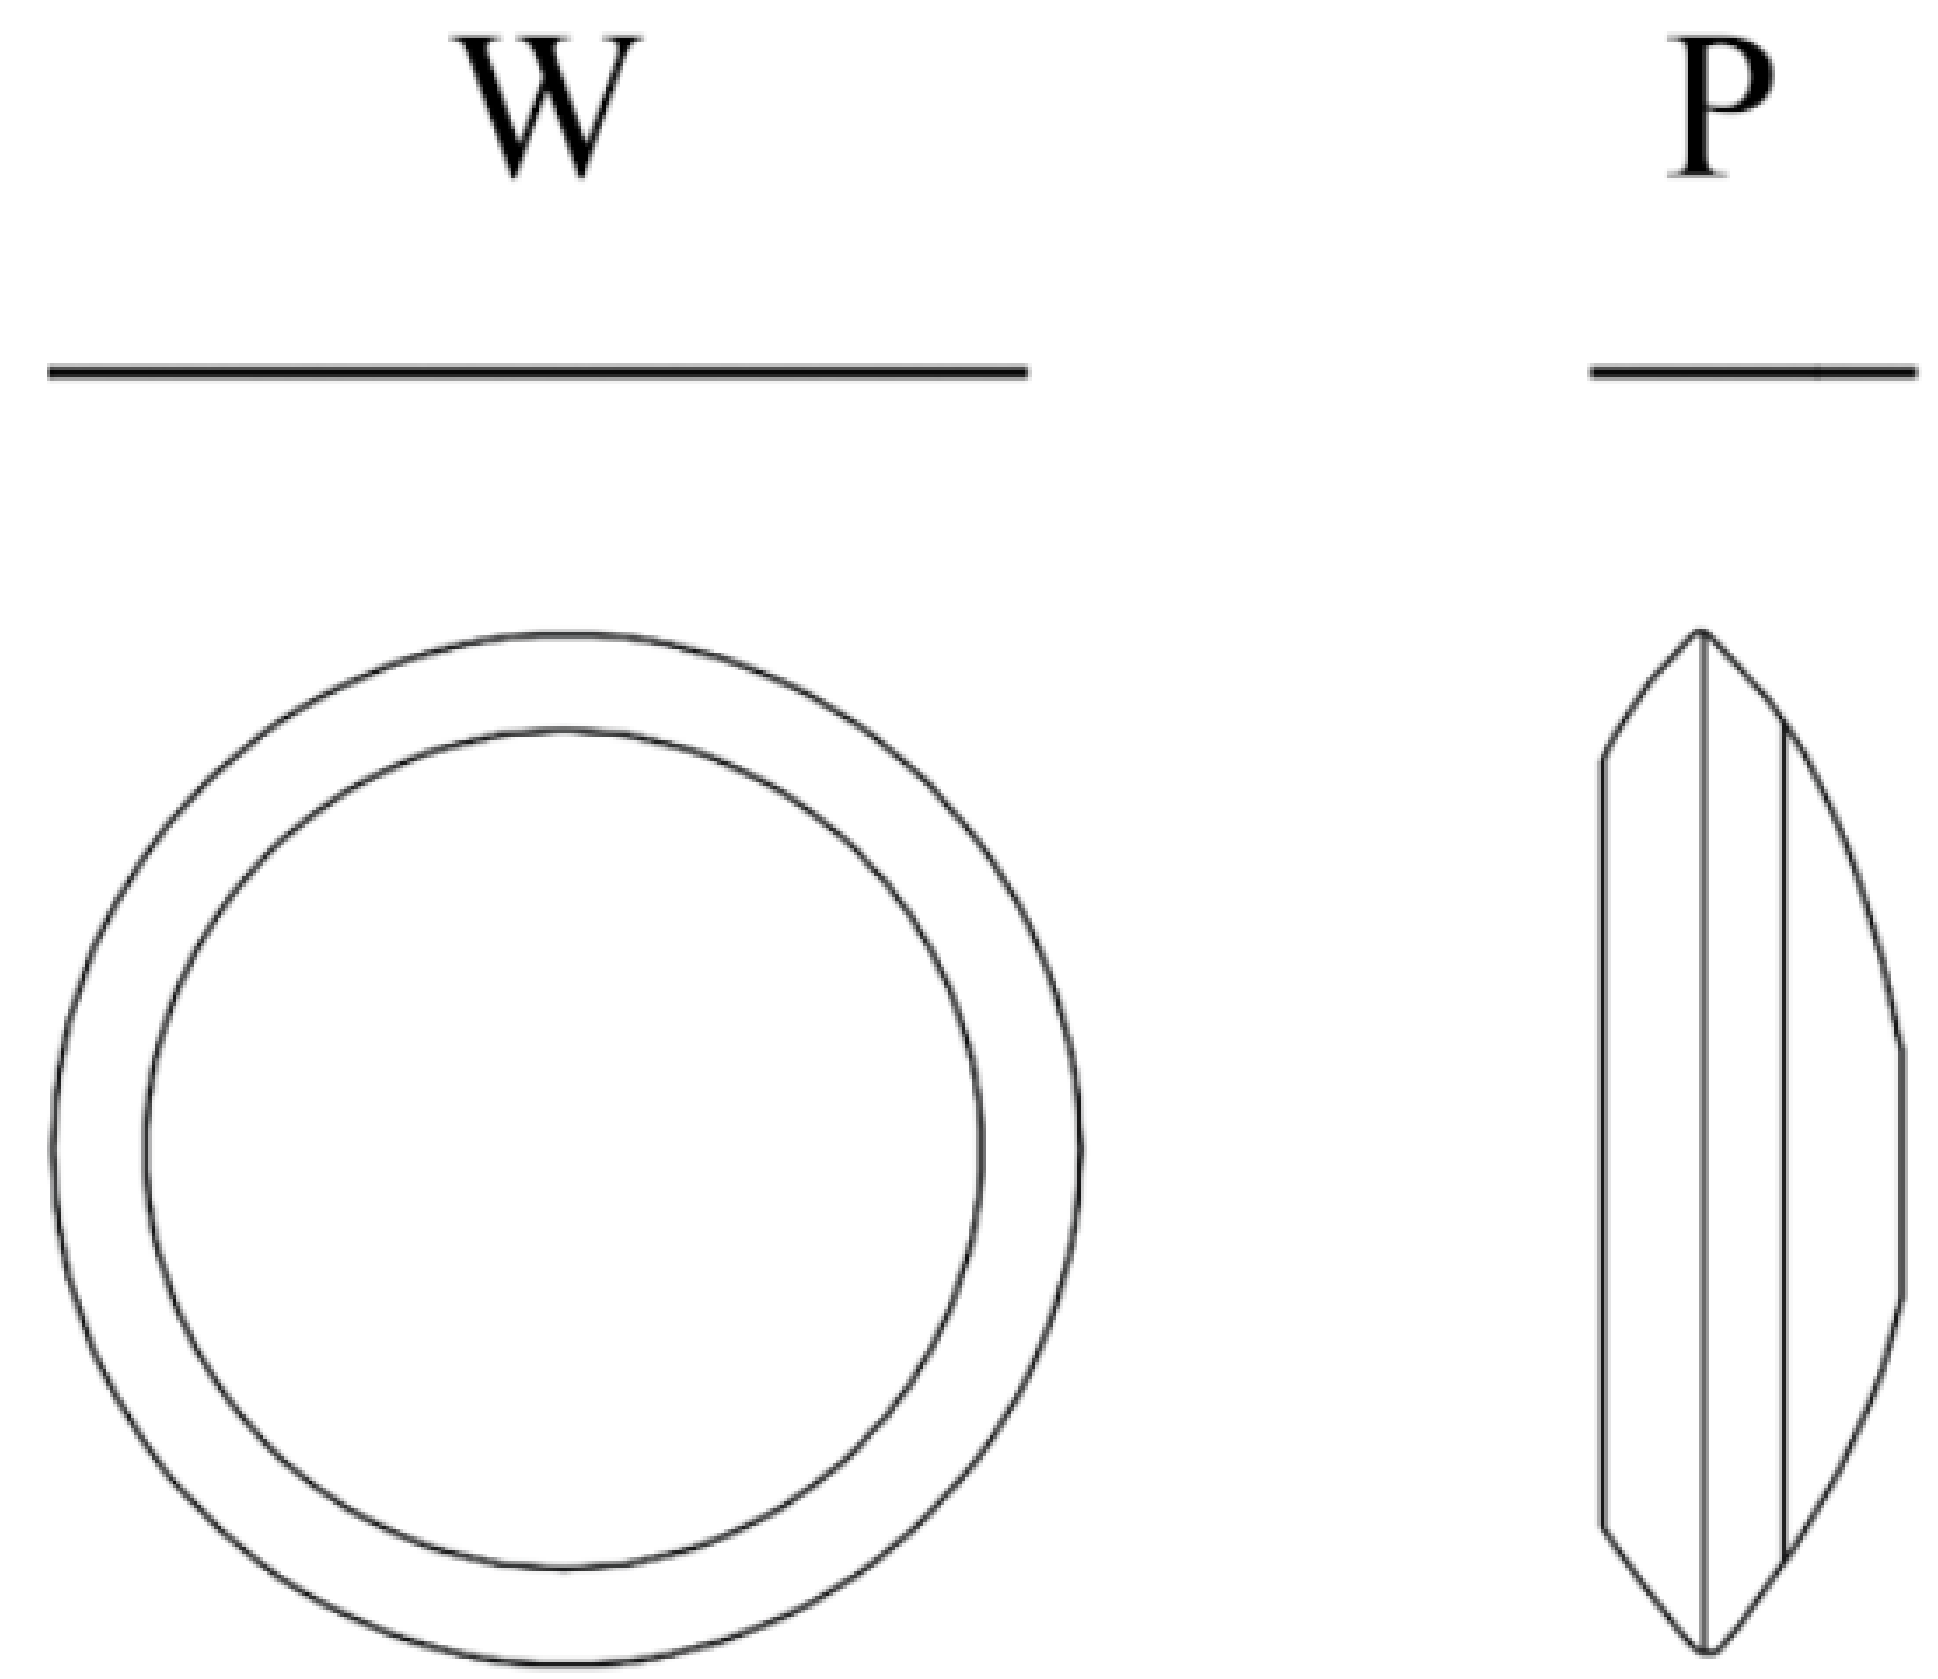

## CUSTOMISZE OPTIONS

## POLAR CURVE

<b>3K</b>	<b>4K</b>	<b>6.5K</b>	<b>CRI &gt;80</b>	<b>DALI</b>
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80	

