

Panel 60x60

SLT-3015



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500K

Life Time : 50.000 hrs

Optic : 110 °

Class : II

MECHANICAL SPECIFICATIONS

Material : Cold rolled steel housing with extruded aluminum profile

Mounting : Recessed mounted







Lens : Opal

Finish : White



Protection Class : IP 40

Mechanical Resistance : IK 06

OPTICS

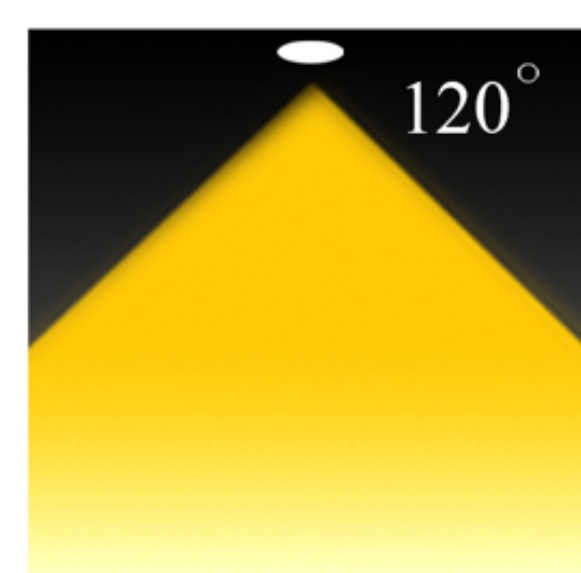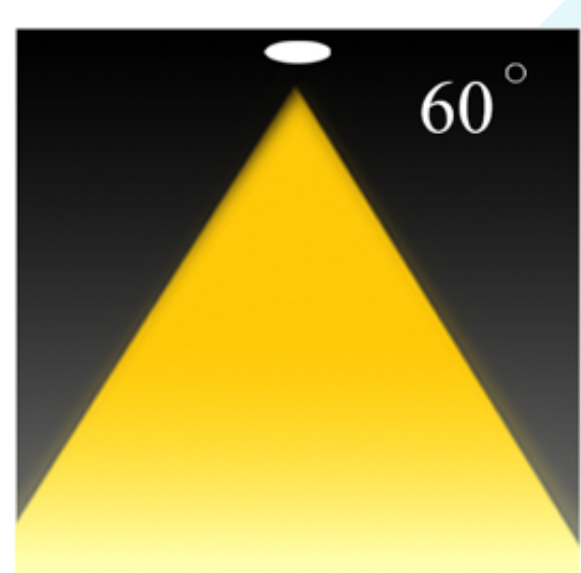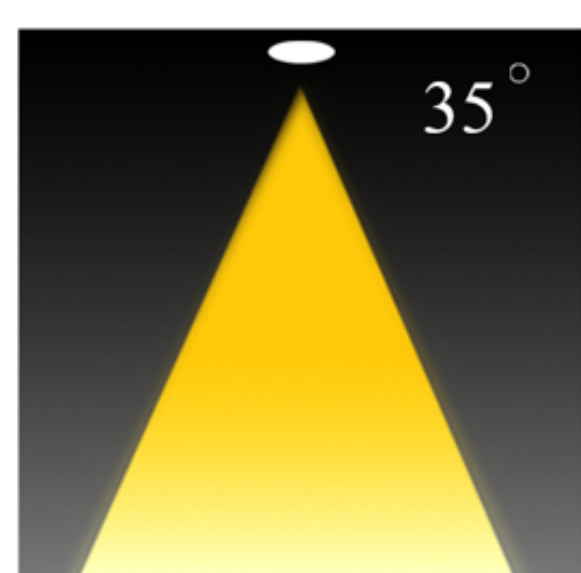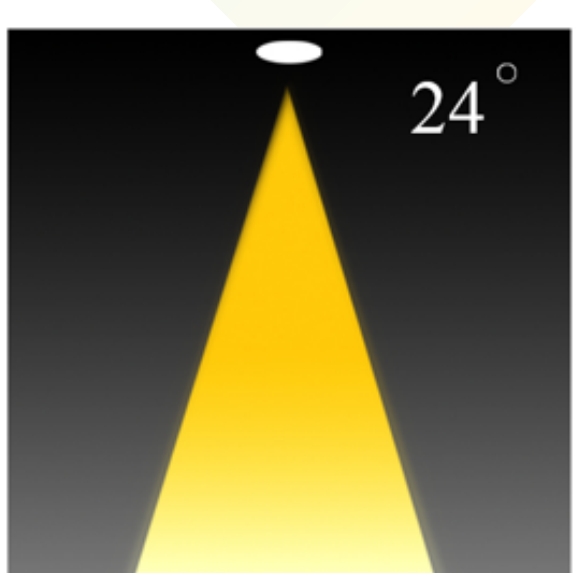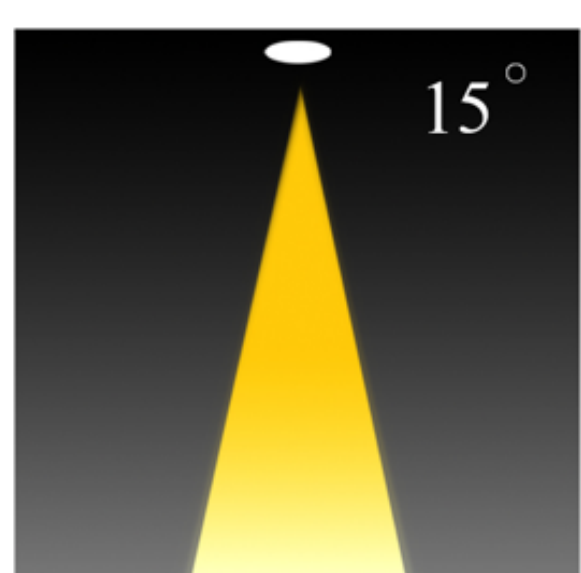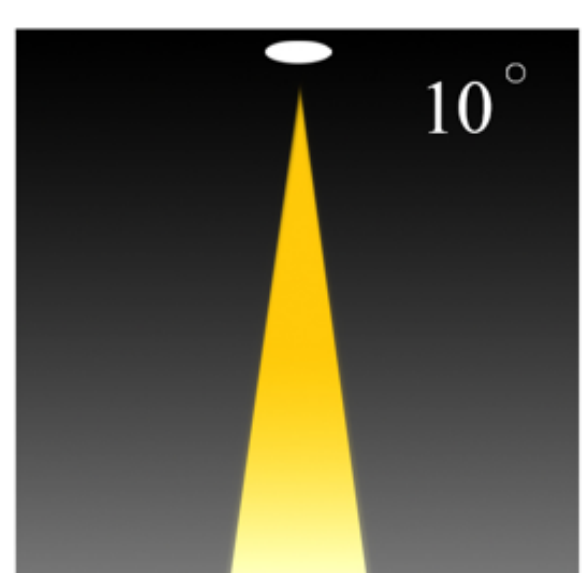

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A x B mm	Driver	LED Chip	Weight
30151408XXXLP040	34 36 40	100	3000 4000 6500	600 x 600 mm	Tridonic Philips Lifud	Osram Lumiled	

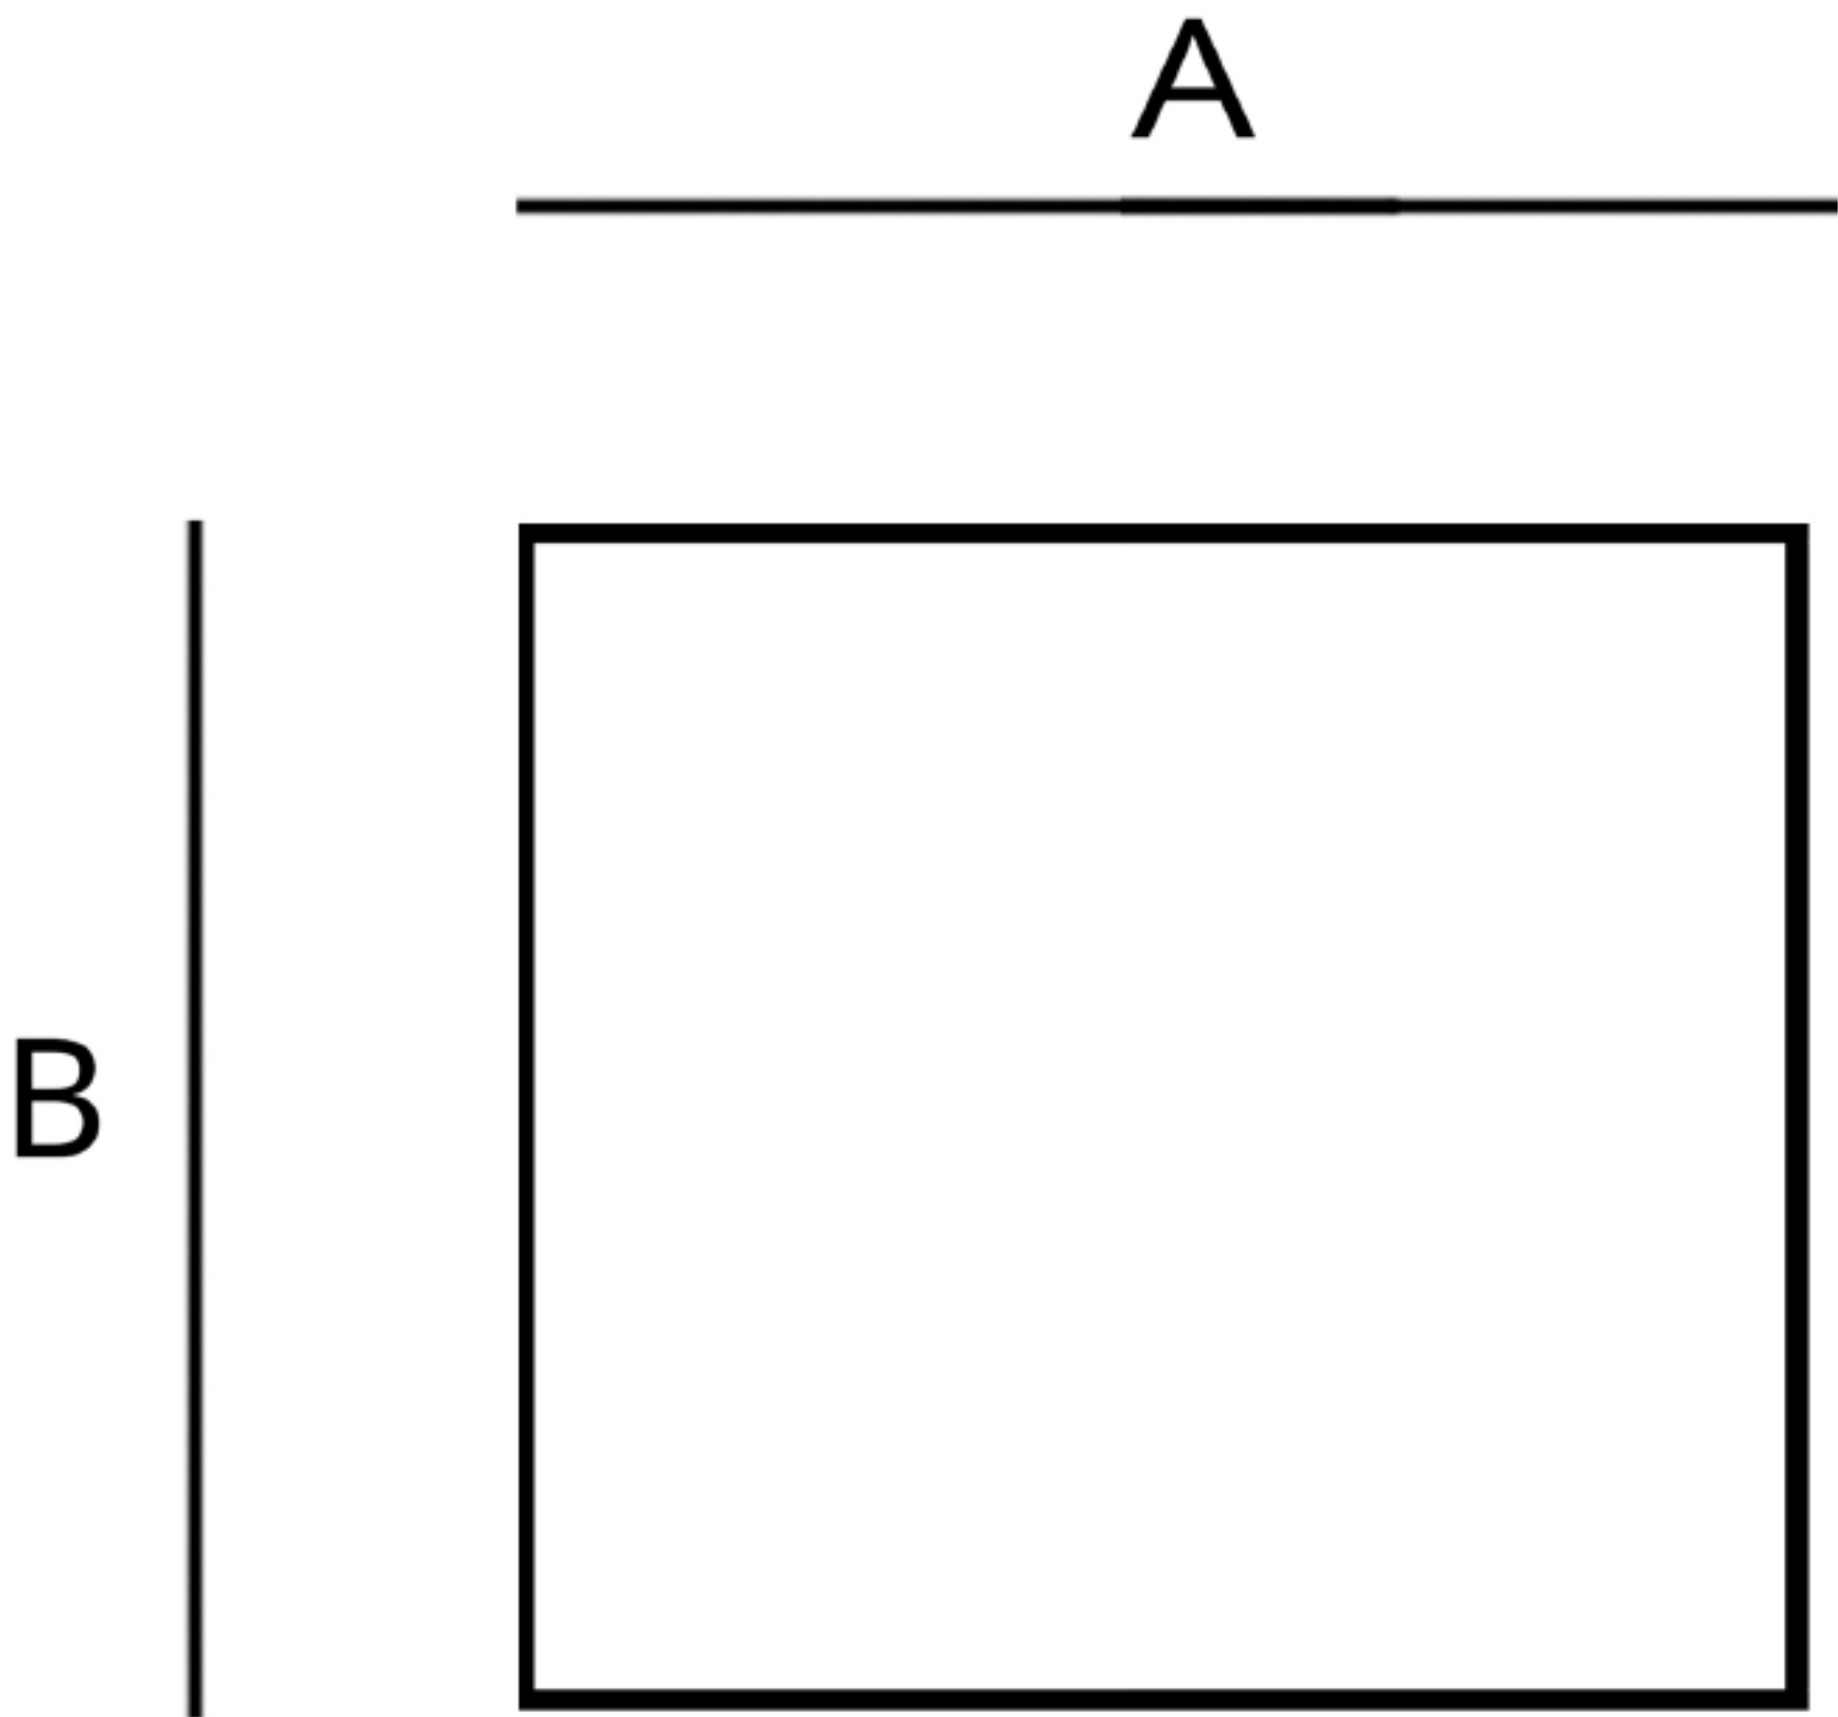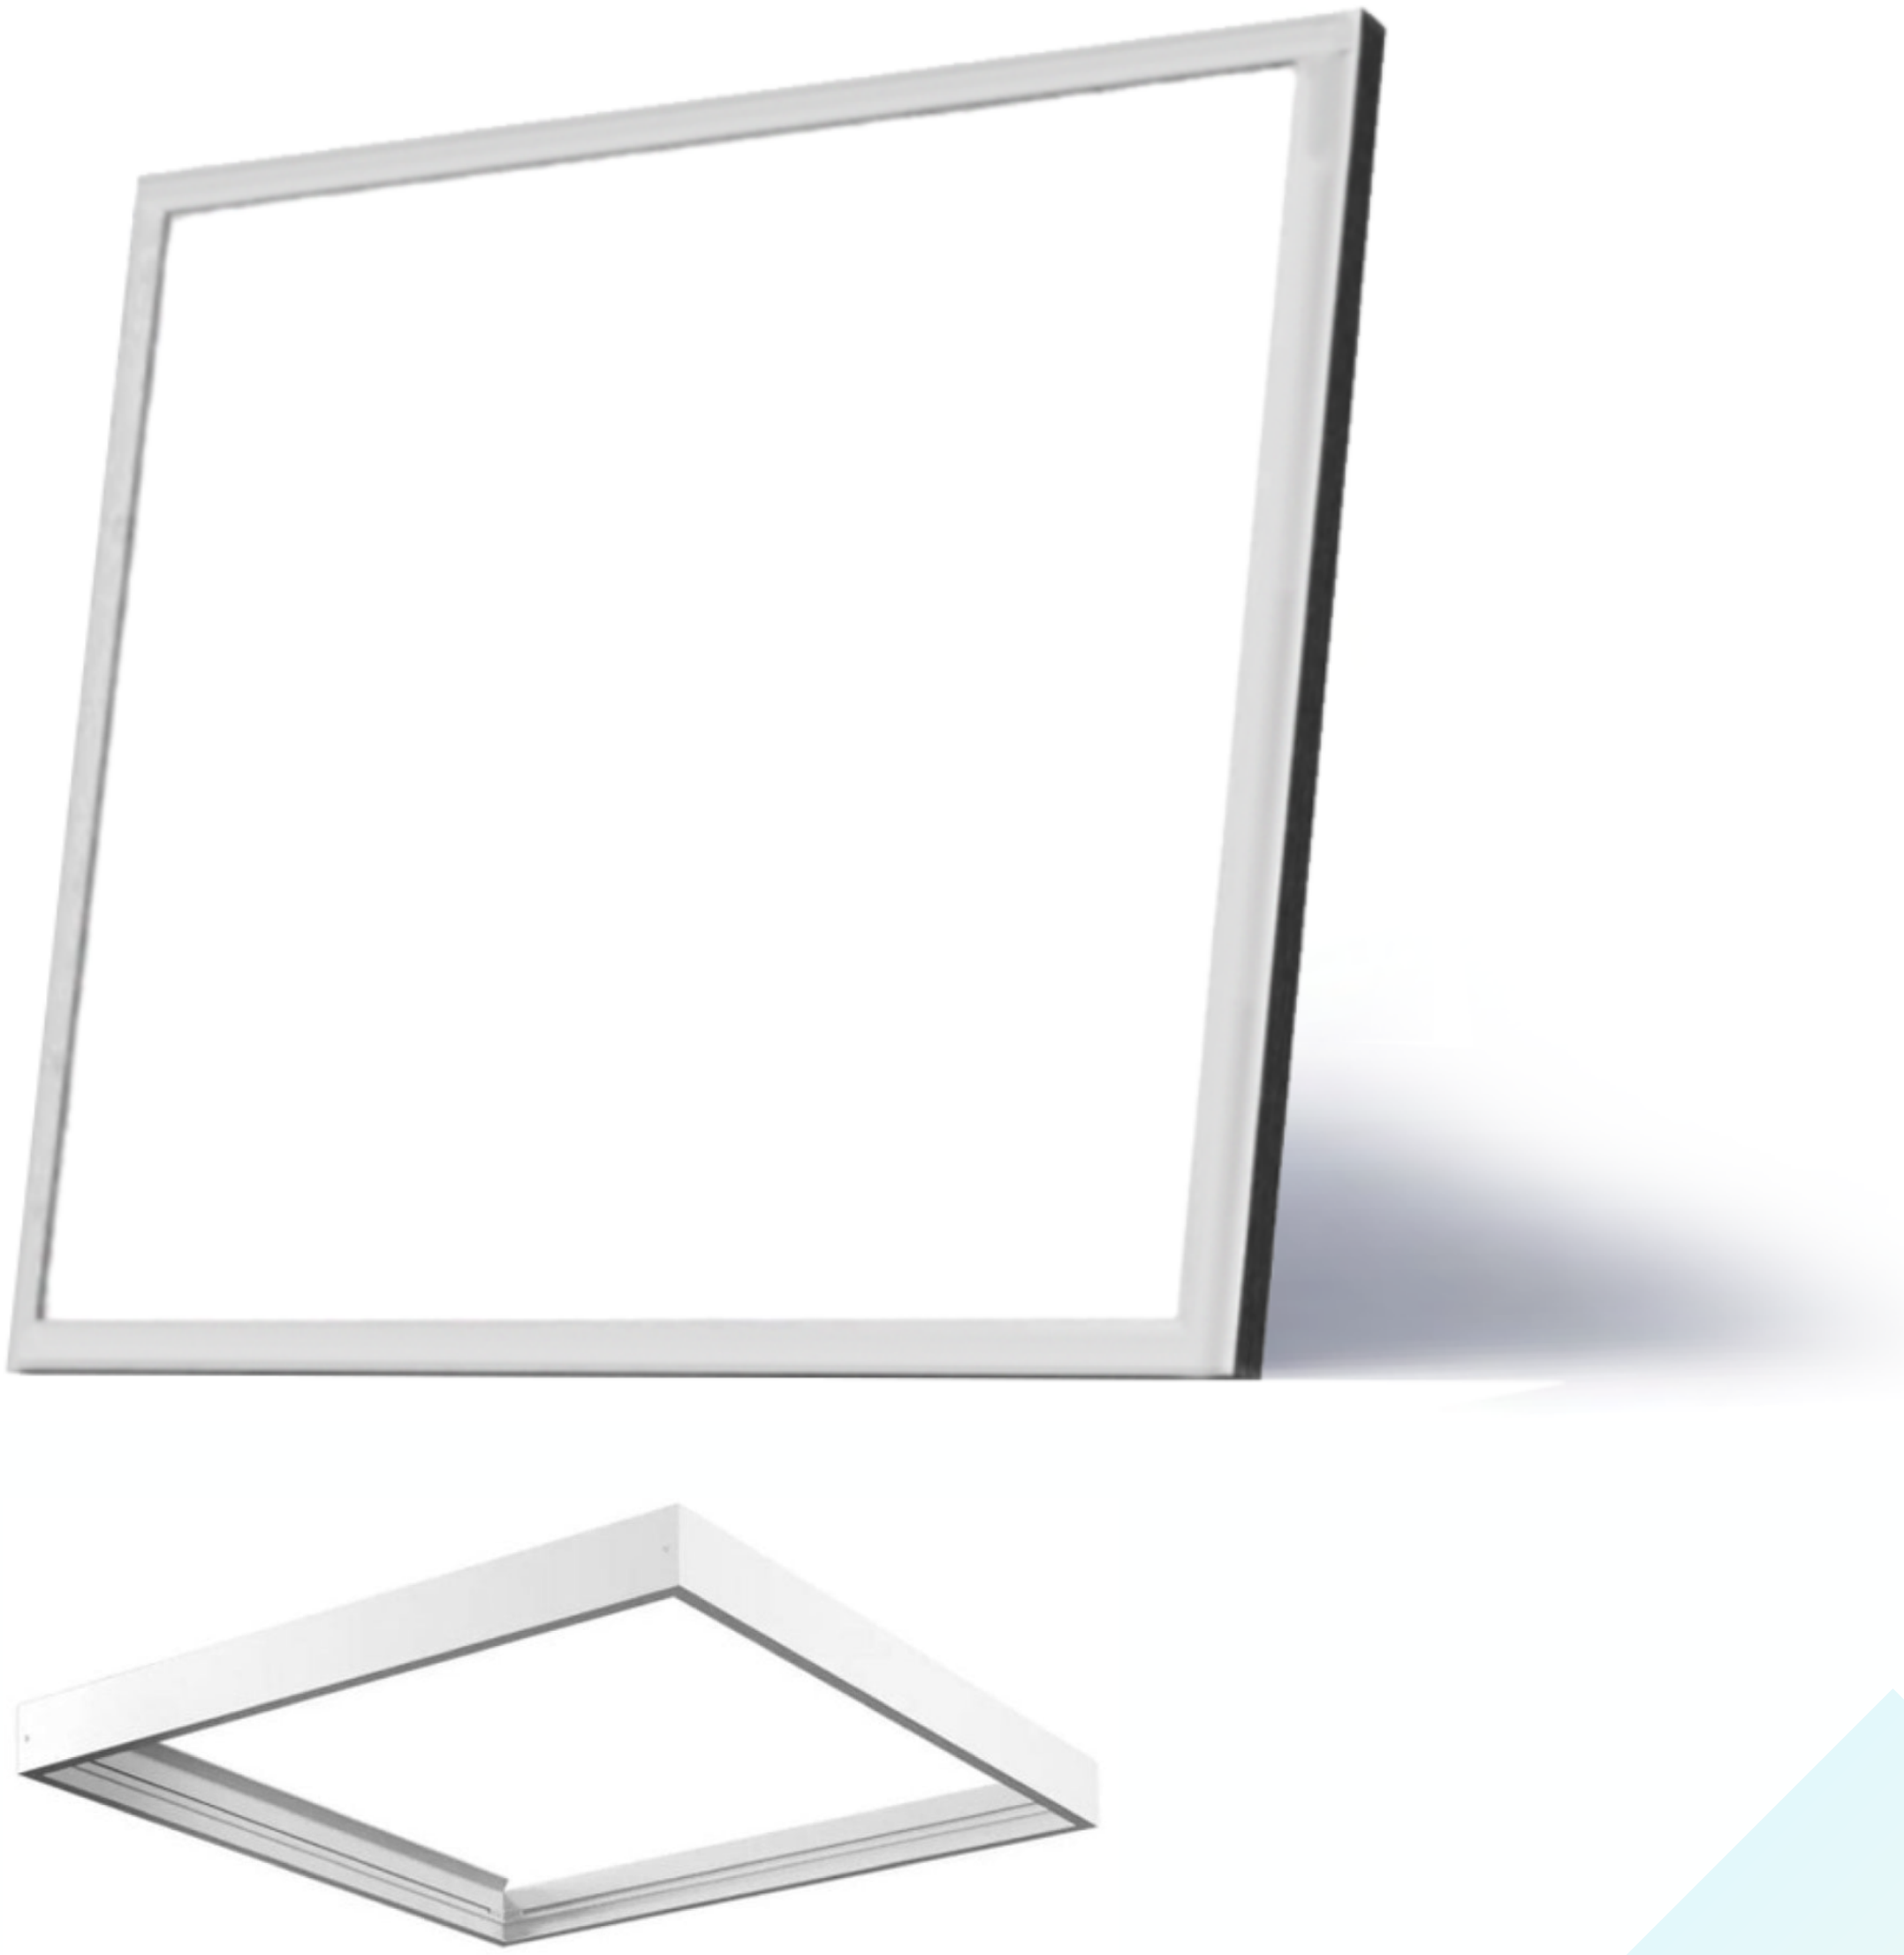

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI >80

Color Rendering Index >80

DALI

Mounting Surface

POLAR CURVE

