

Panel 120x30

SLT-3016



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500K

Life Time : 50.000 hrs

Optic : 110 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Cold rolled steel housing with extruded aluminum profile

Mounting : Recessed mounted


Lens : Opal

Finish : White


Protection Class : IP 40

Mechanical Resistance : IK 06

OPTICS

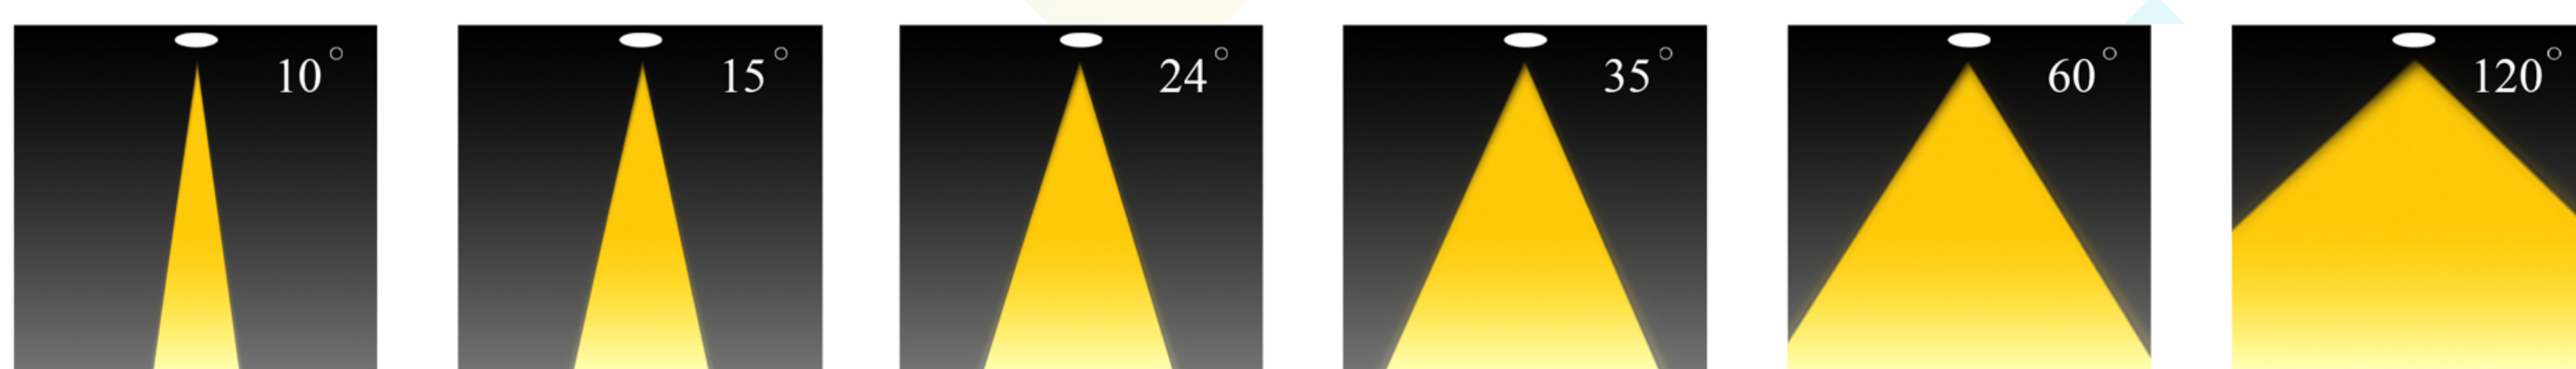

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A x B mm	Driver	LED Chip	Weight
30161658XXXOT040	40	100	6500	1200 x 300 mm	Tridonic	Osram	



CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI
>80

Color Rendering Index >80

DALI

Mounting
Surface

POLAR CURVE

