

Double Downlight

SLT-3205



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 35°

Class : II

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminum

Mounting : Recessed Double Spot






Lens : Glass

Finish : White & Black


Protection Class : IP 54

Mechanical Resistance : IK 07

OPTICS

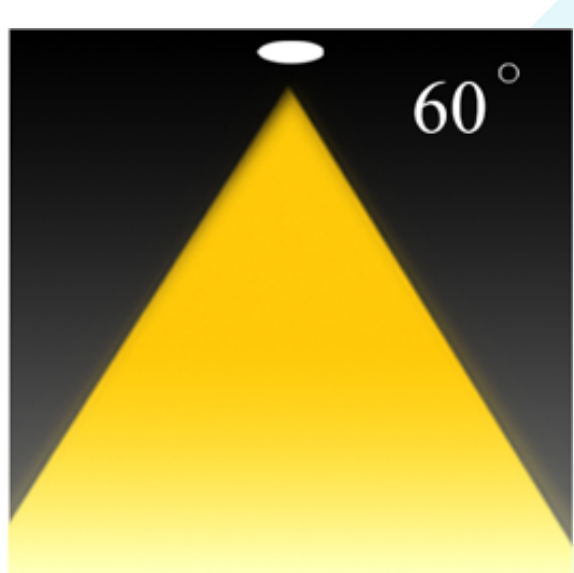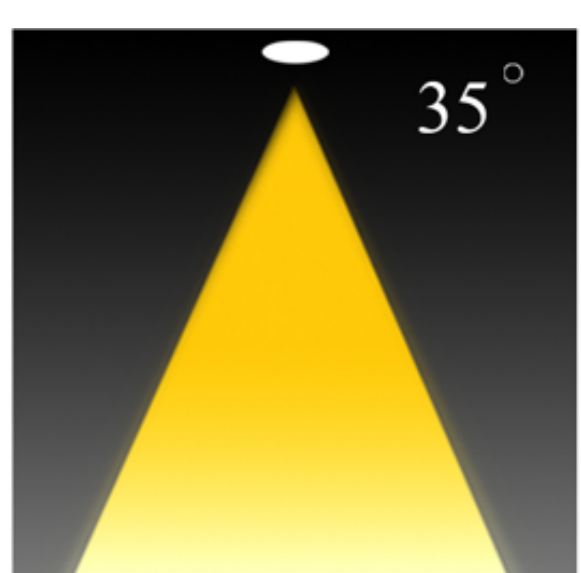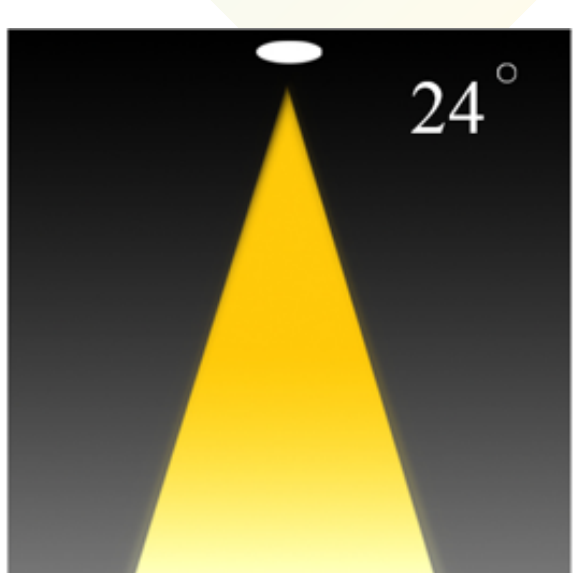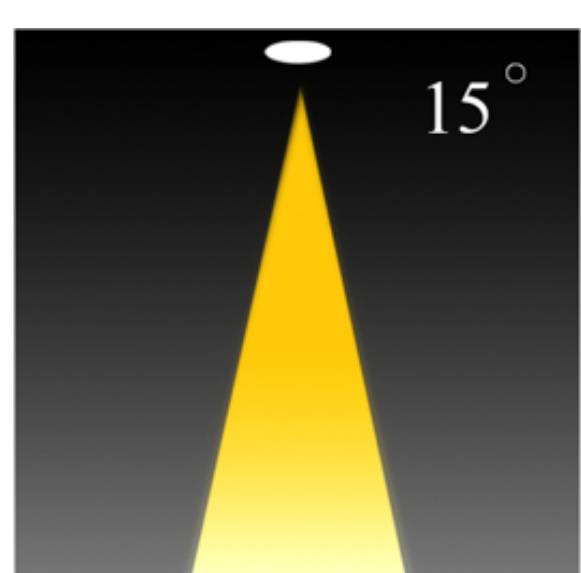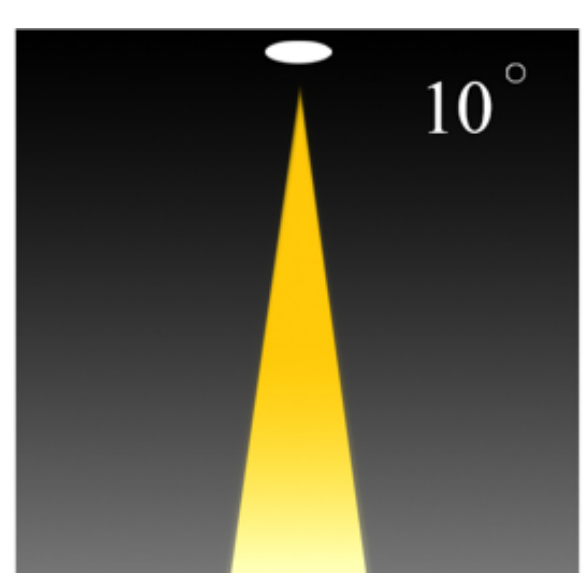

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A - B mm	Driver	LED Chip	Weight
32051XXXXXXOT0XX	2 x 9 2x10 2x12	100	3000 4000 6500		Tridonic Lifud	Osram	

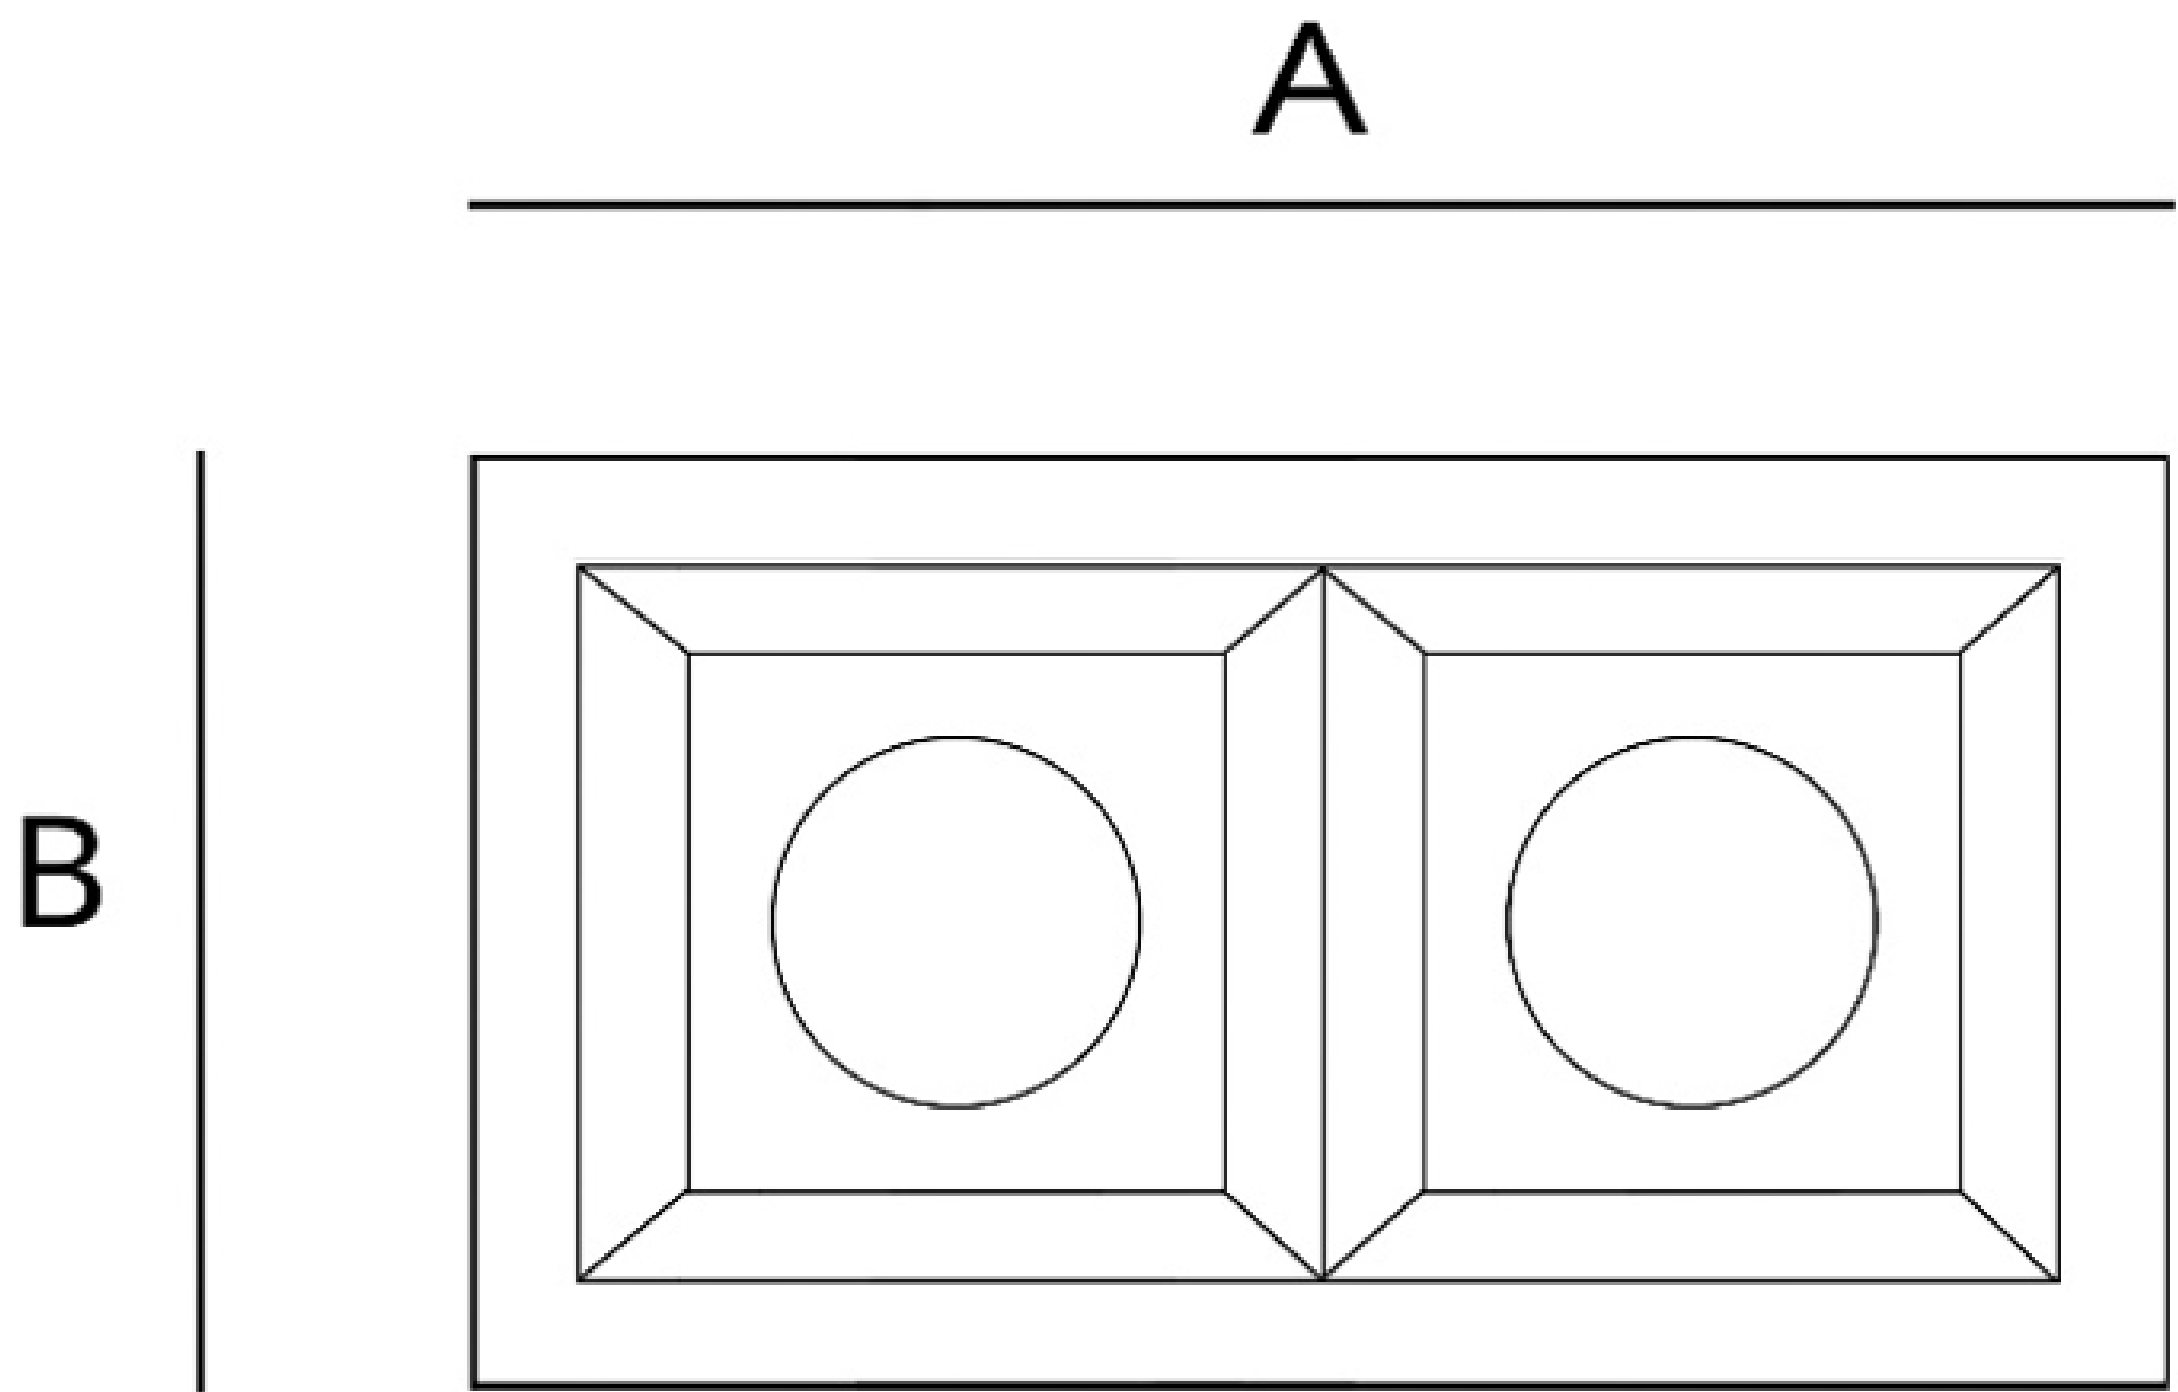

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

