

Double Downlight

SLT-3206



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 35°

Class : II

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminum

Mounting : Recessed mounted


Lens : Glass

Finish : White


Protection Class : IP 54

Mechanical Resistance : IK 07

OPTICS

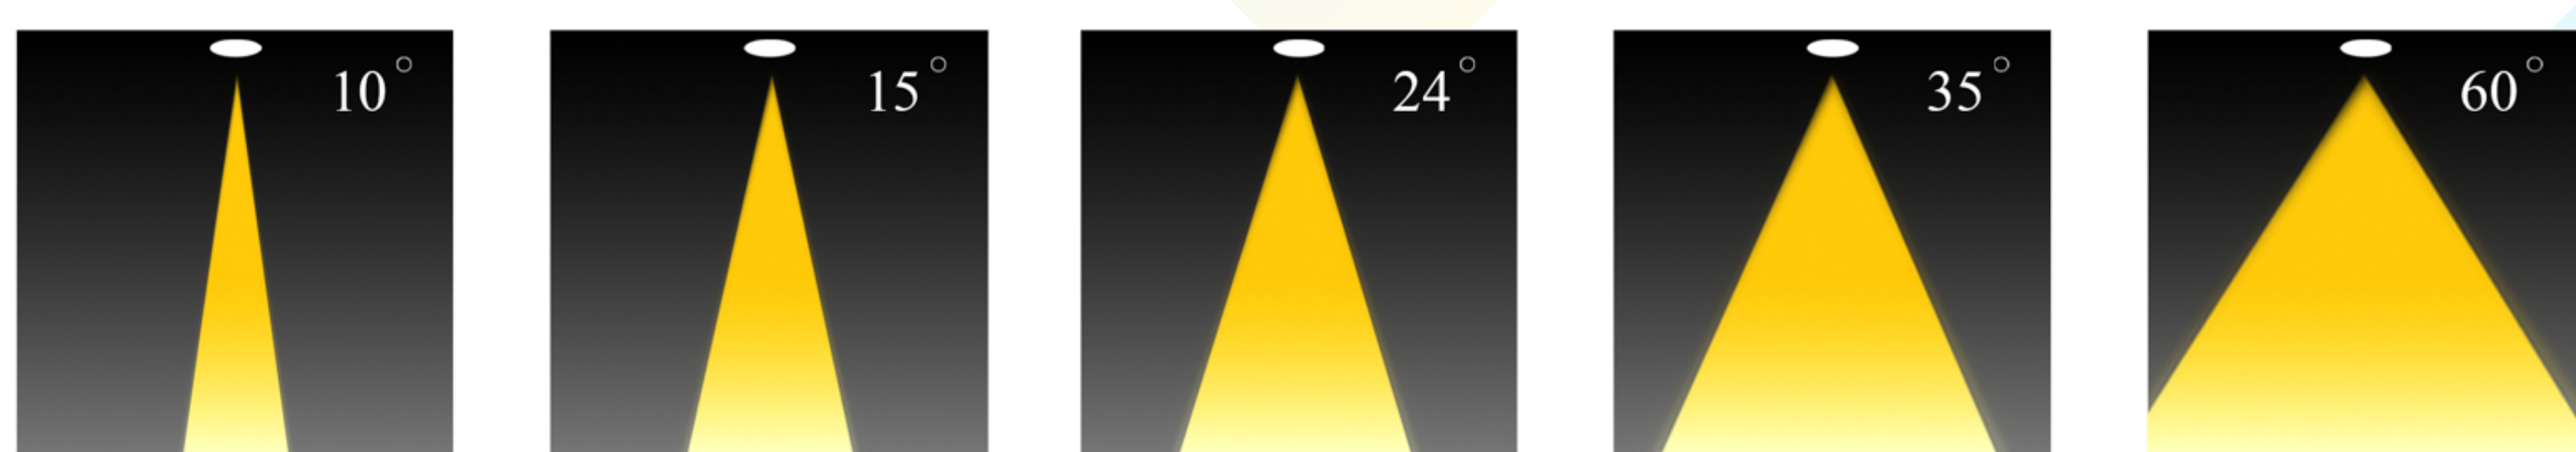

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A - B mm	Driver	LED Chip	Weight
32061XX8XXXOXXXX	2*9 2*10 2*12 2*15	100	3000 4000 6500		Tridonic Done	Osram	

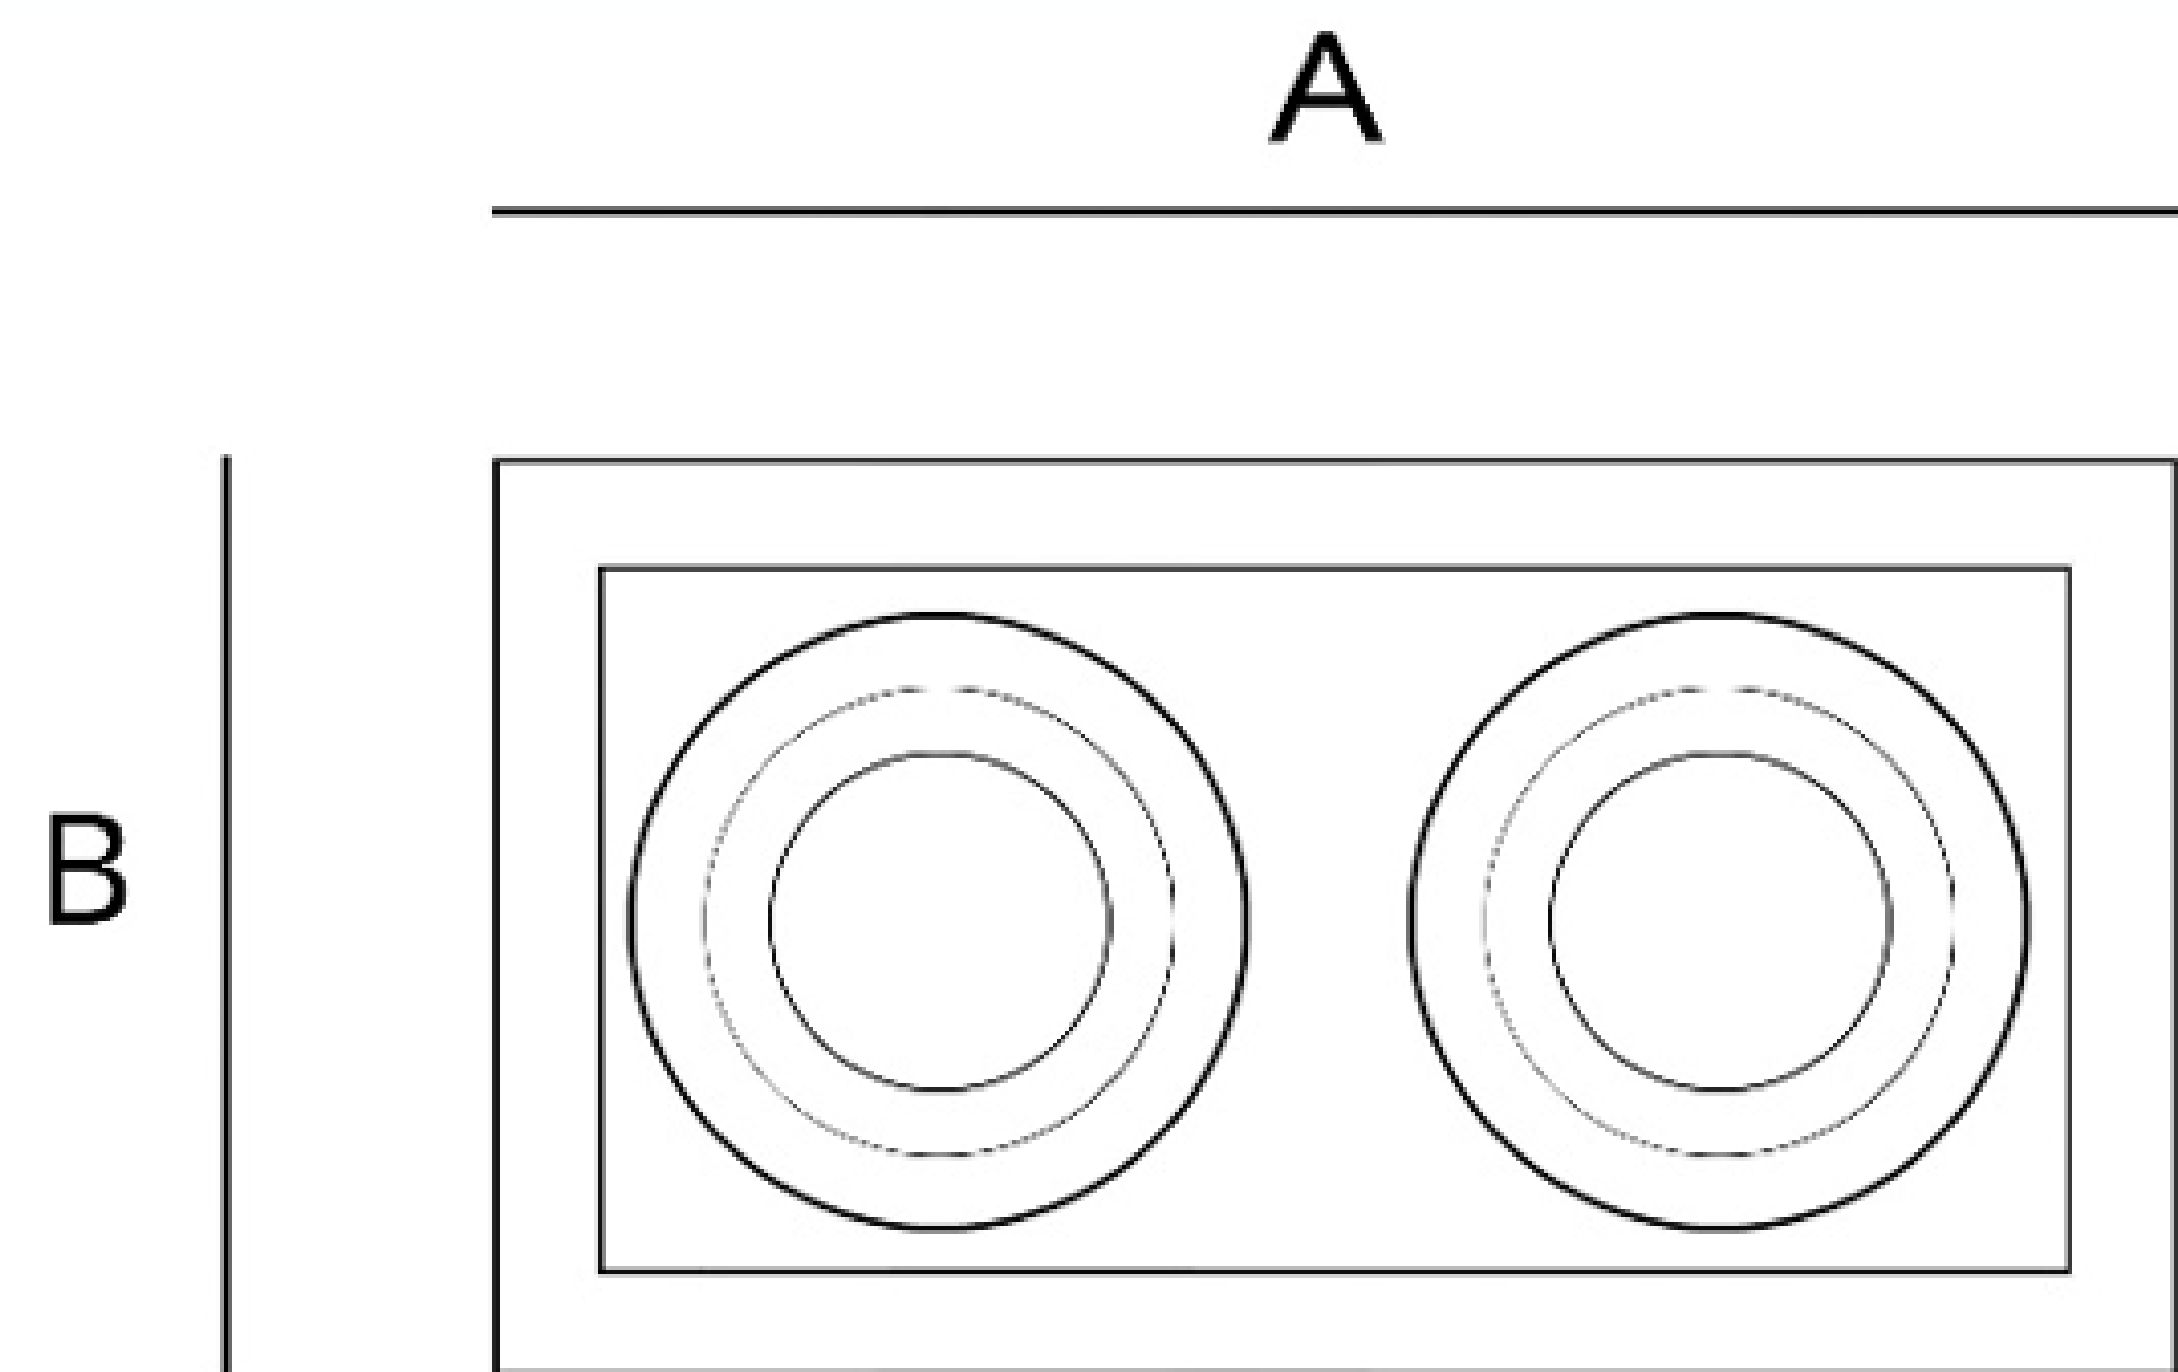

CUSTOMISZE OPTIONS

3K	4K	6.5K	CRI >80	DALI
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80	

POLAR CURVE

