

Flood Light

SLT-4018



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : 100-265 V

Frequency : 50 Hz

Color Rendering : CRI 70

Color Temperature : 6000 K

Life Time : 50.000 hrs

Optic : 90 °

Class : II

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Mounting : Surface - Wall mounted


Lens : Glass

Finish : Gray


Protection Class : IP 66

Mechanical Resistance : IK 08

OPTICS

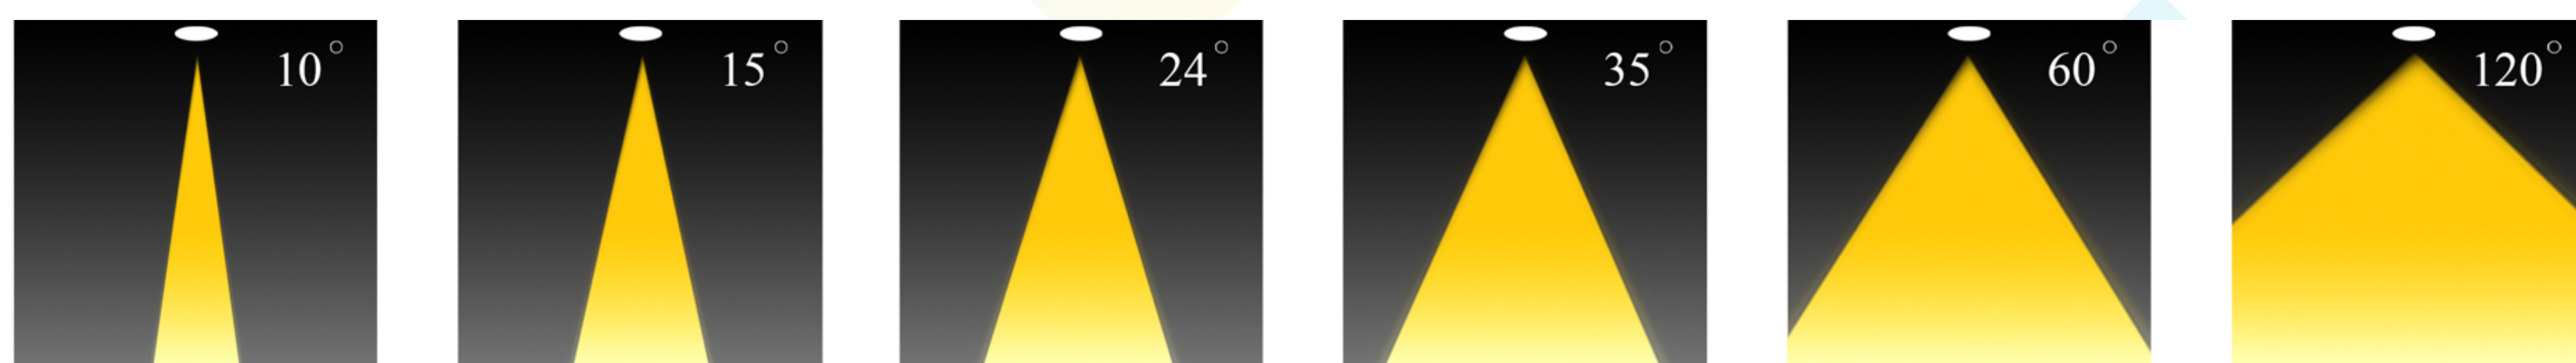

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Weight Kg
40183607090LXXXX	300 400	130	6000	490×520×65mm	Done Lifud Philips Moso	Lumiled	7.730

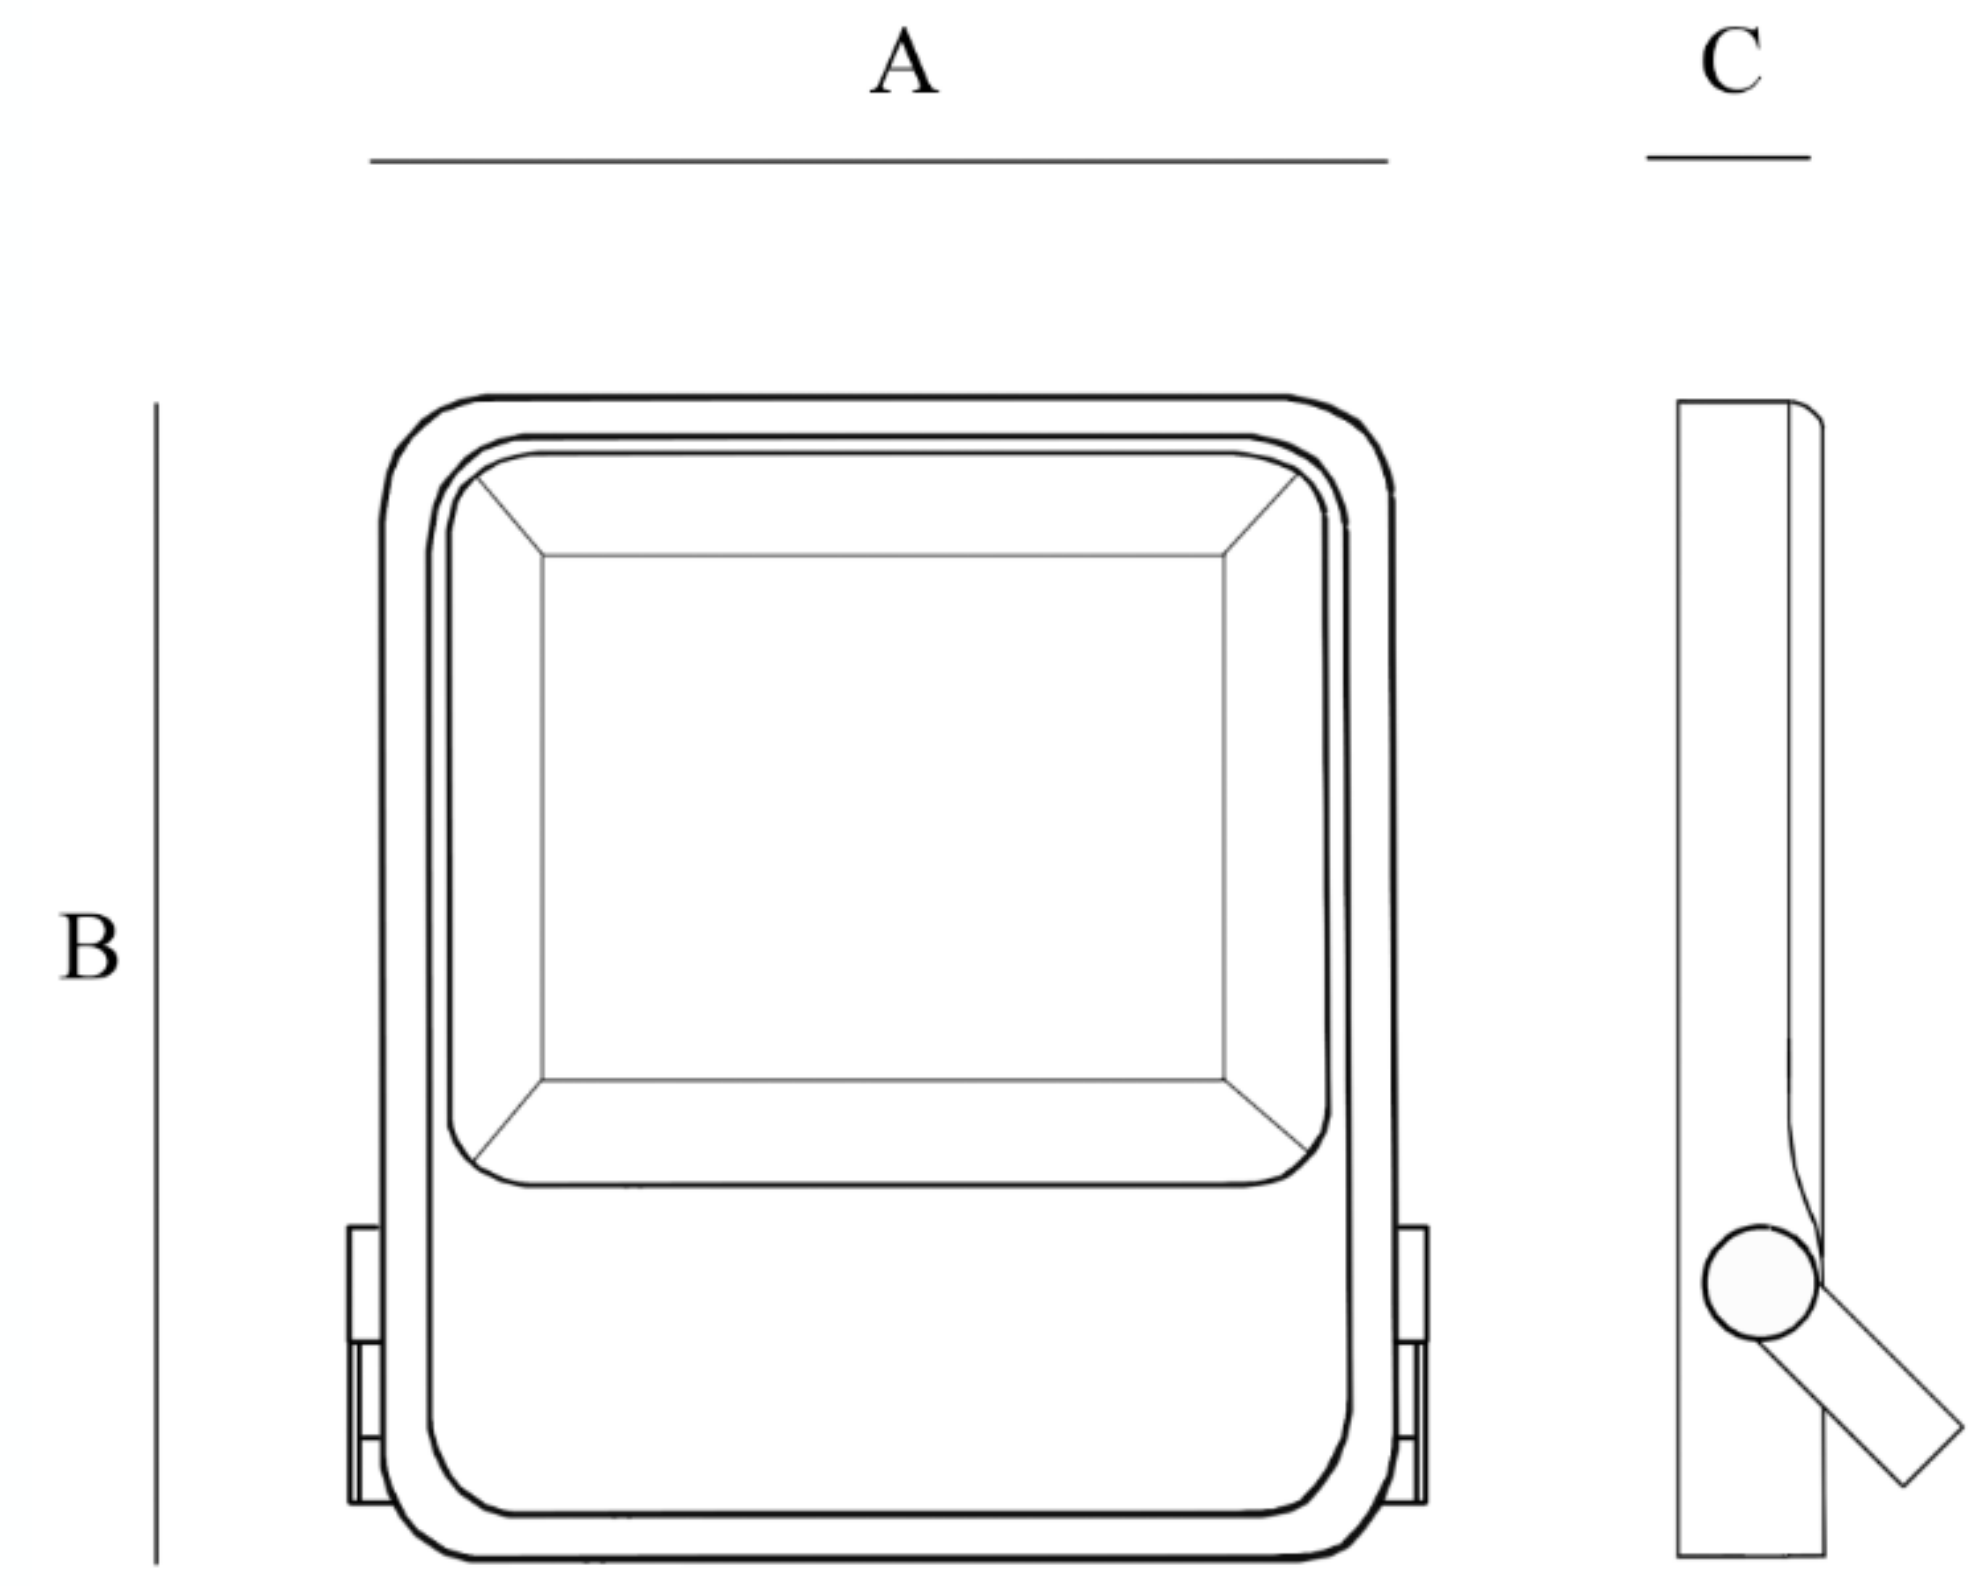

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

