

Flood Light

SLT-4019



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : 100-265 V

Frequency : 50 Hz

Color Rendering : CRI 70

Color Temperature : 6000 K

Life Time : 30.000-50.000hrs

Optic : 90 °

Class : II

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Mounting : Surface - Wall mounted


Lens : Glass

Finish : Gray


Protection Class : IP 66

Mechanical Resistance : IK 08

OPTICS

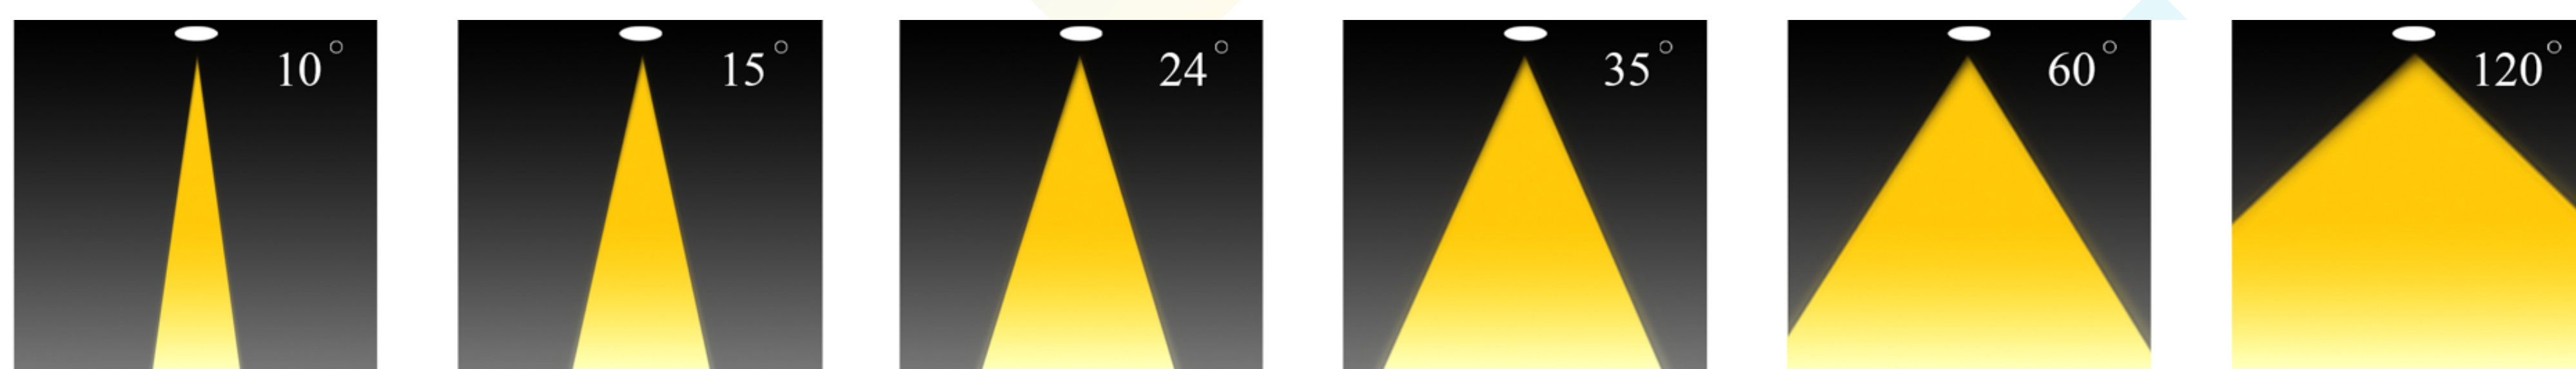

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Y gli j v Kg
40193607090LXXXX	300 400	130	6000	495×445×100mm	Done Lifud Philips Moso	Lumiled	7.060

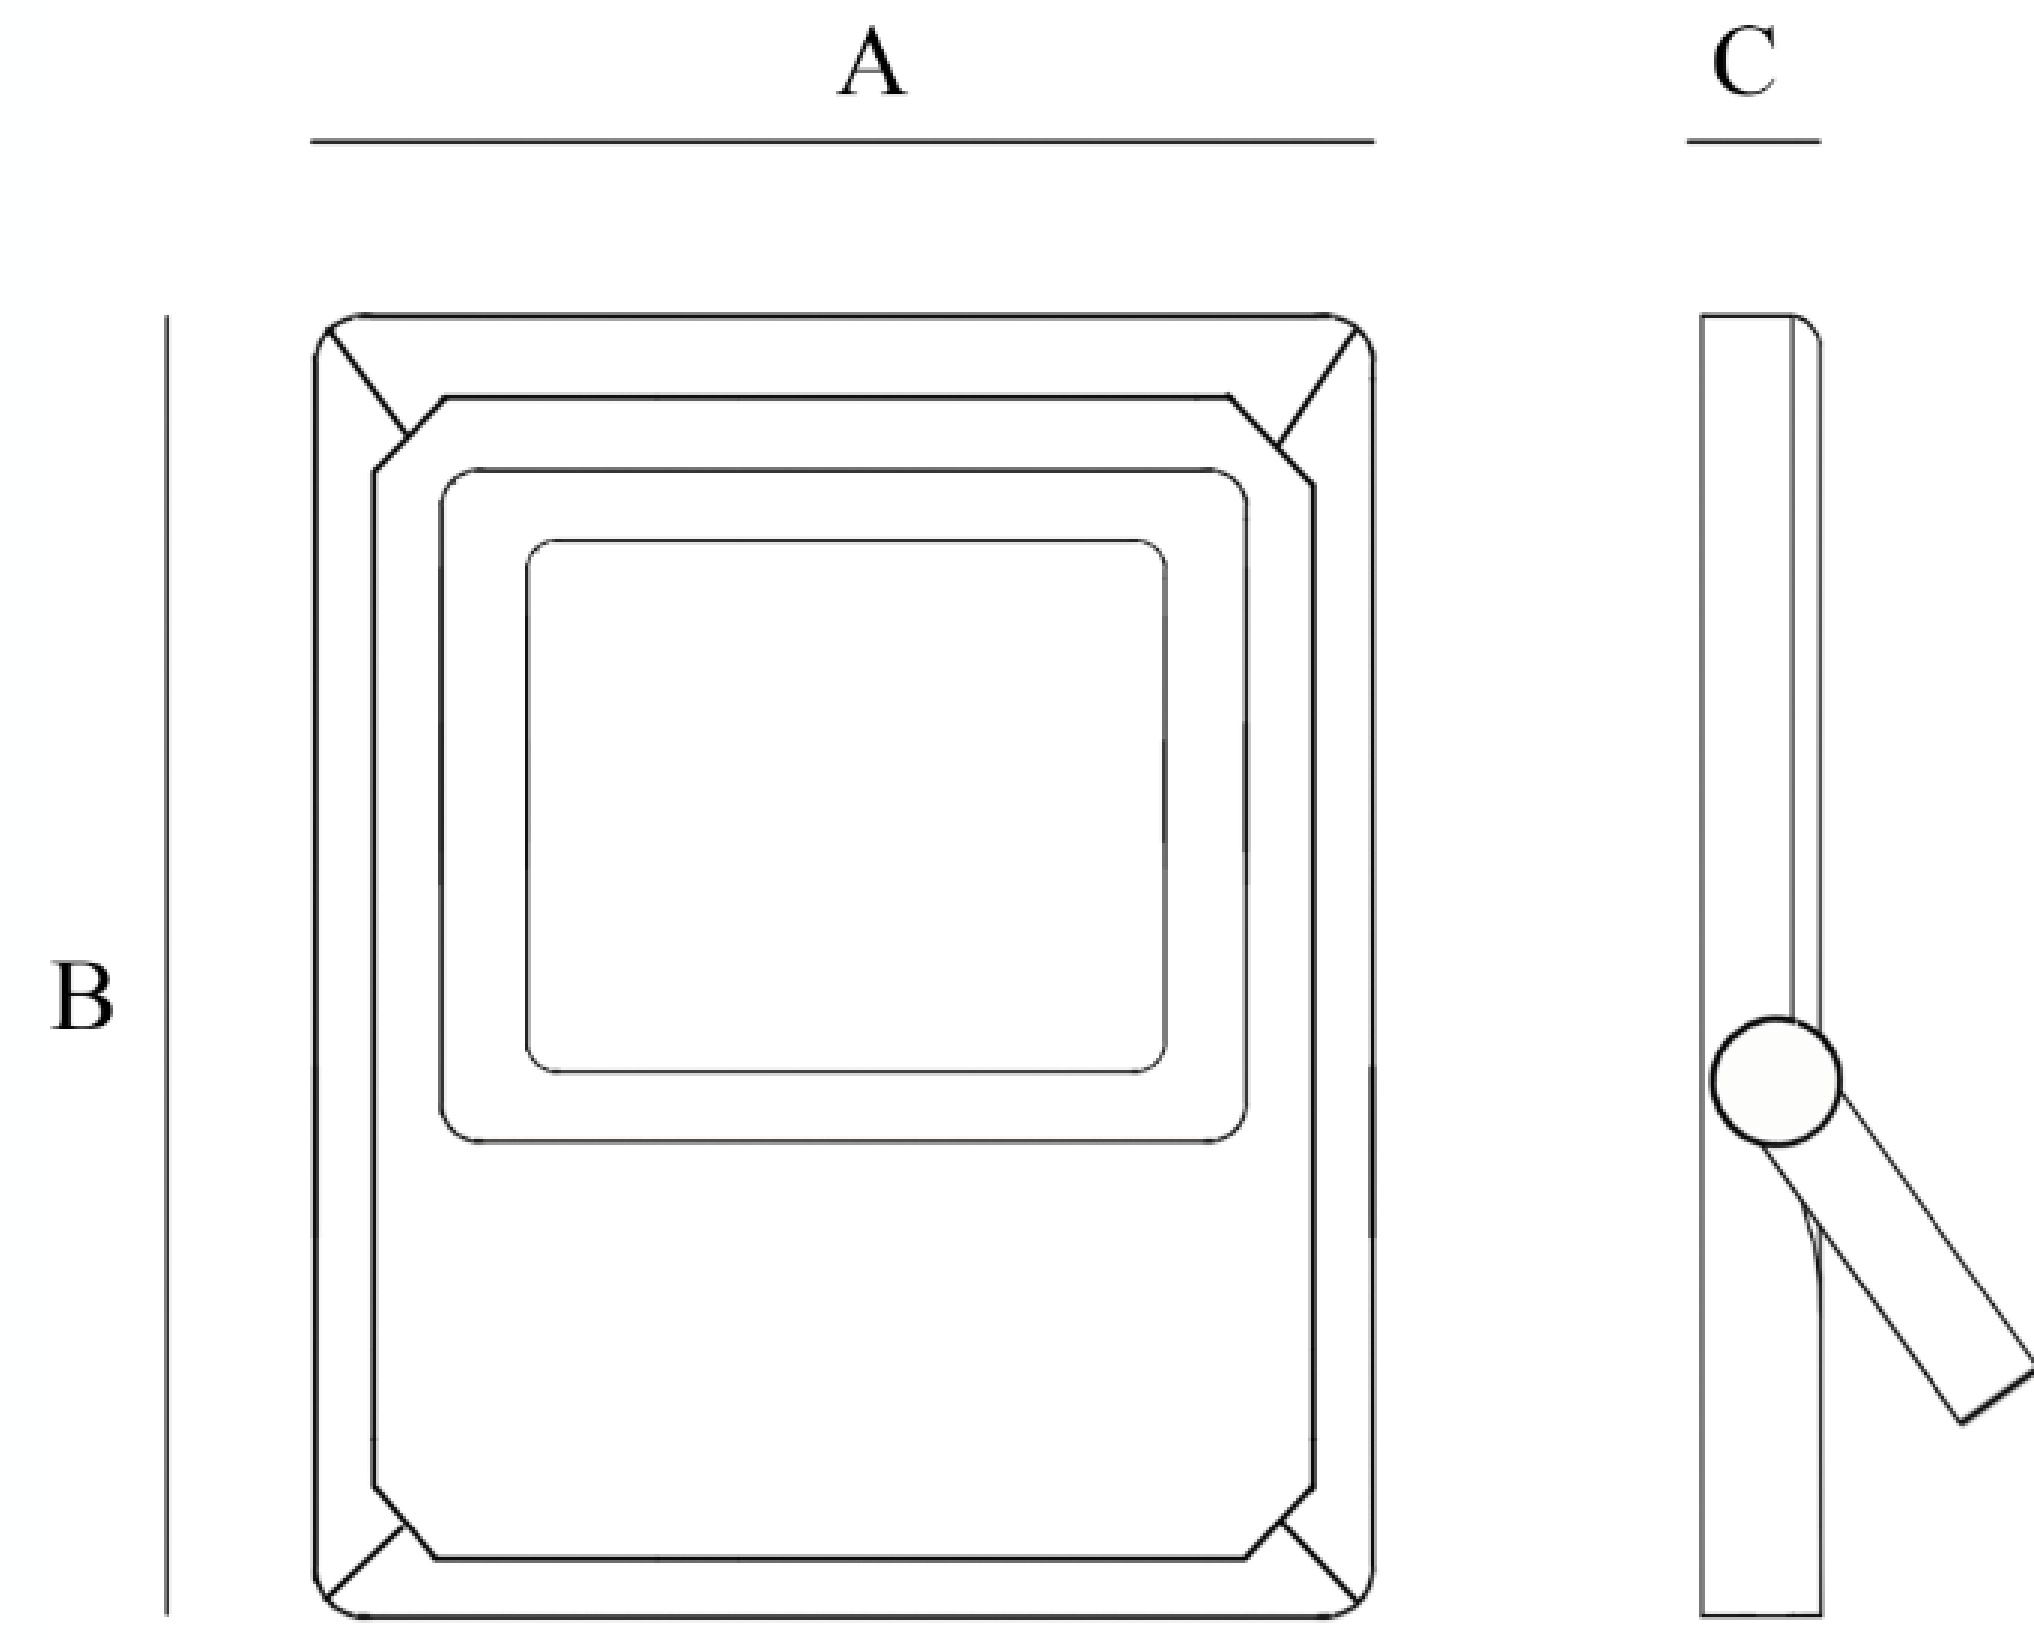

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

IK10

POLAR CURVE

