

Highbay

SLT- 5012 - Mega



PERFORMANCE DATA

Efficacy : 140 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 6500 K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Diecast Aluminum

Frame : Metal

Mounting : Suspended







Lens : Glass

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

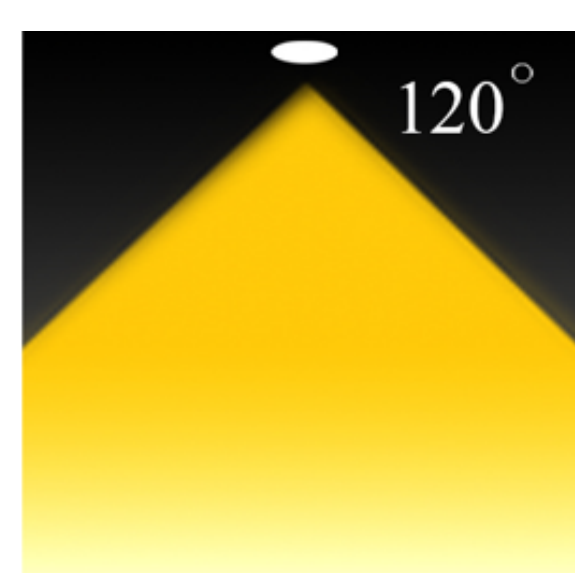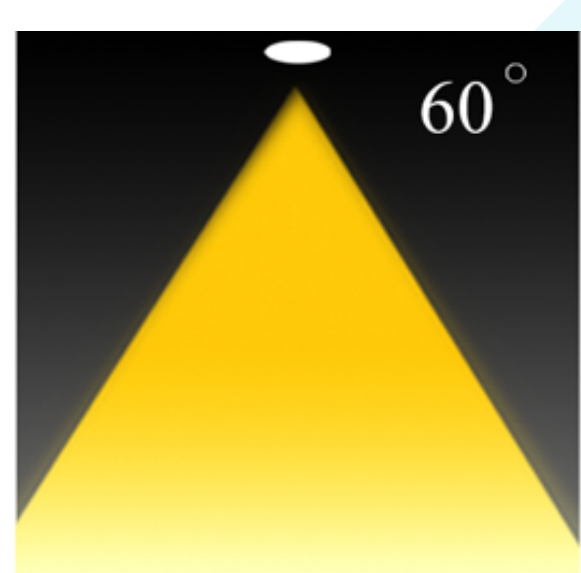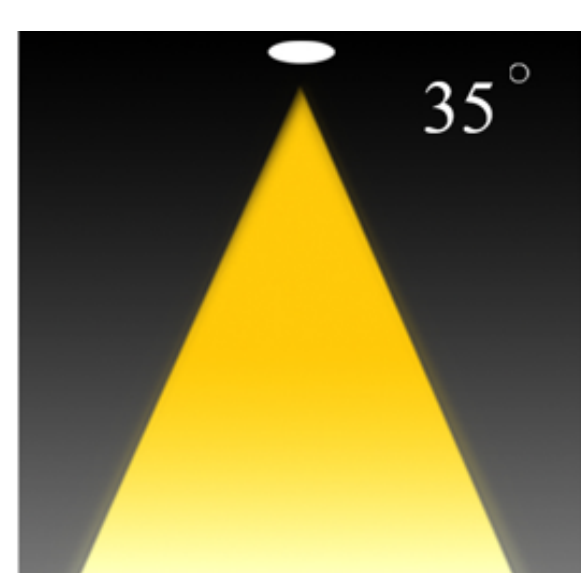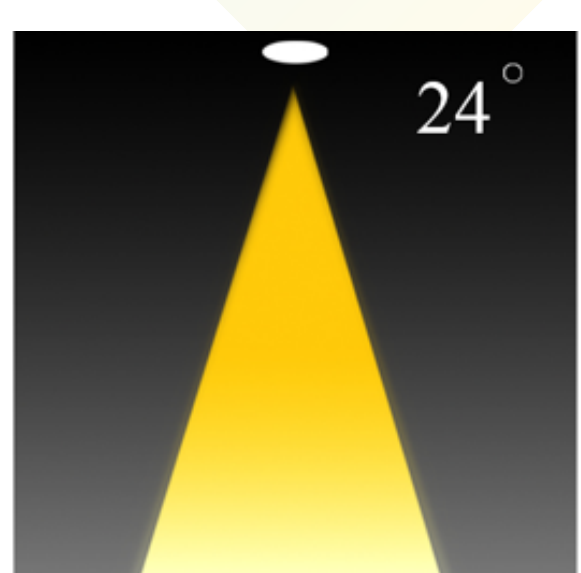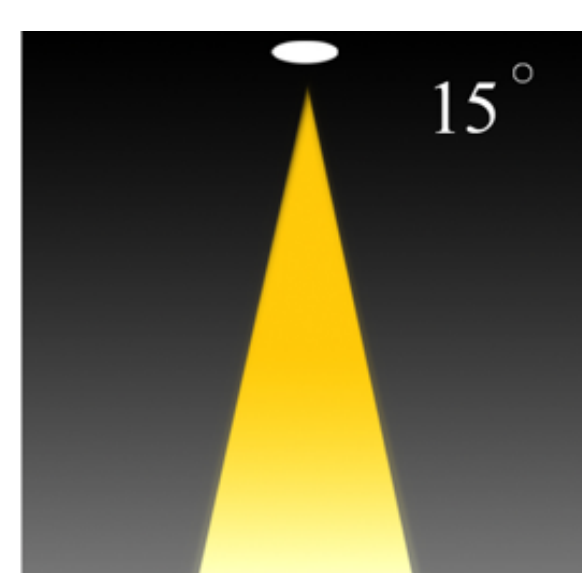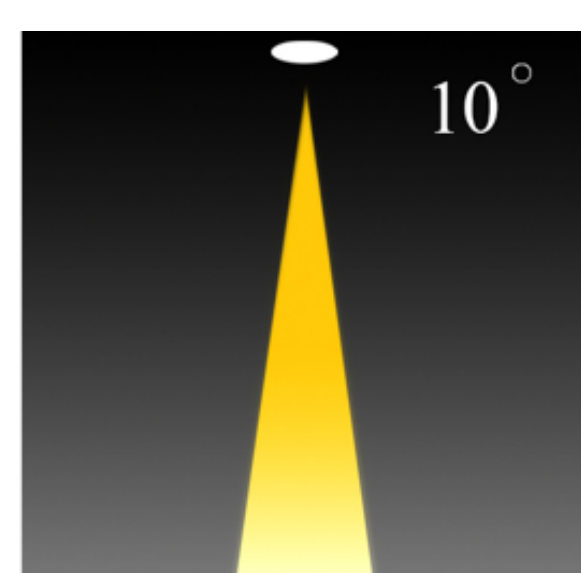

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xH mm	Driver	LED Chip	Weight Kg
50122XX8120LXXXX	100 150 200 240	140	3000 4000 6500	354x144 mm	Lifud Philips Done	Lumileds	5.080

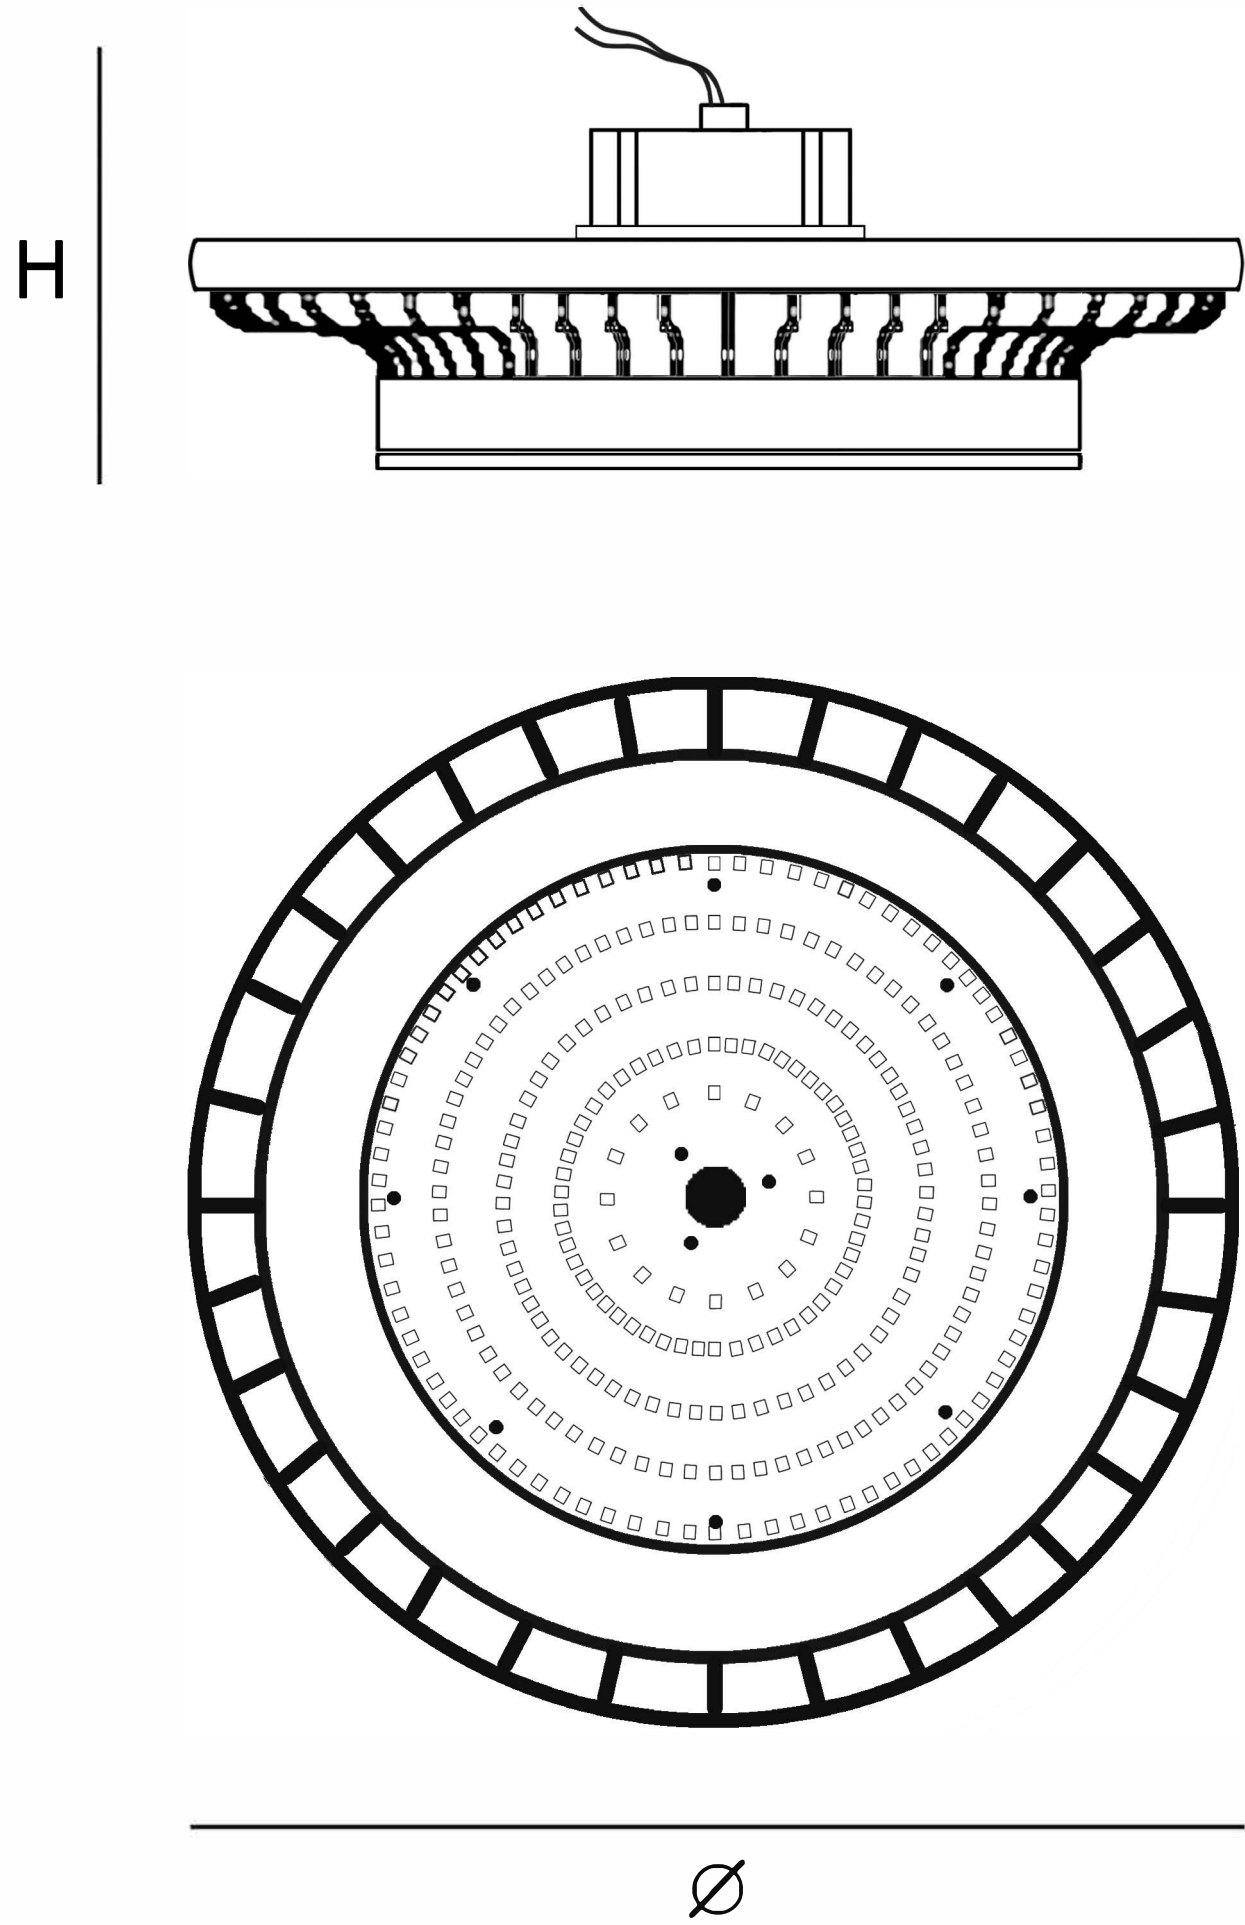

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

IK10

POLAR CURVE

