

# Highbay

SLT- 5013 - Mega With Arm



## PERFORMANCE DATA

**Efficacy :** 140 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 6500K

**Life Time :** 50.000 hrs

**Optic :** 120 °

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Diecast Aluminum

**Frame :** Metal

**Mounting :** Suspended


**Lens :** Glass

**Finish :** Black

**Protection Class :** IP 65


**Mechanical Resistance :** IK 08

## OPTICS

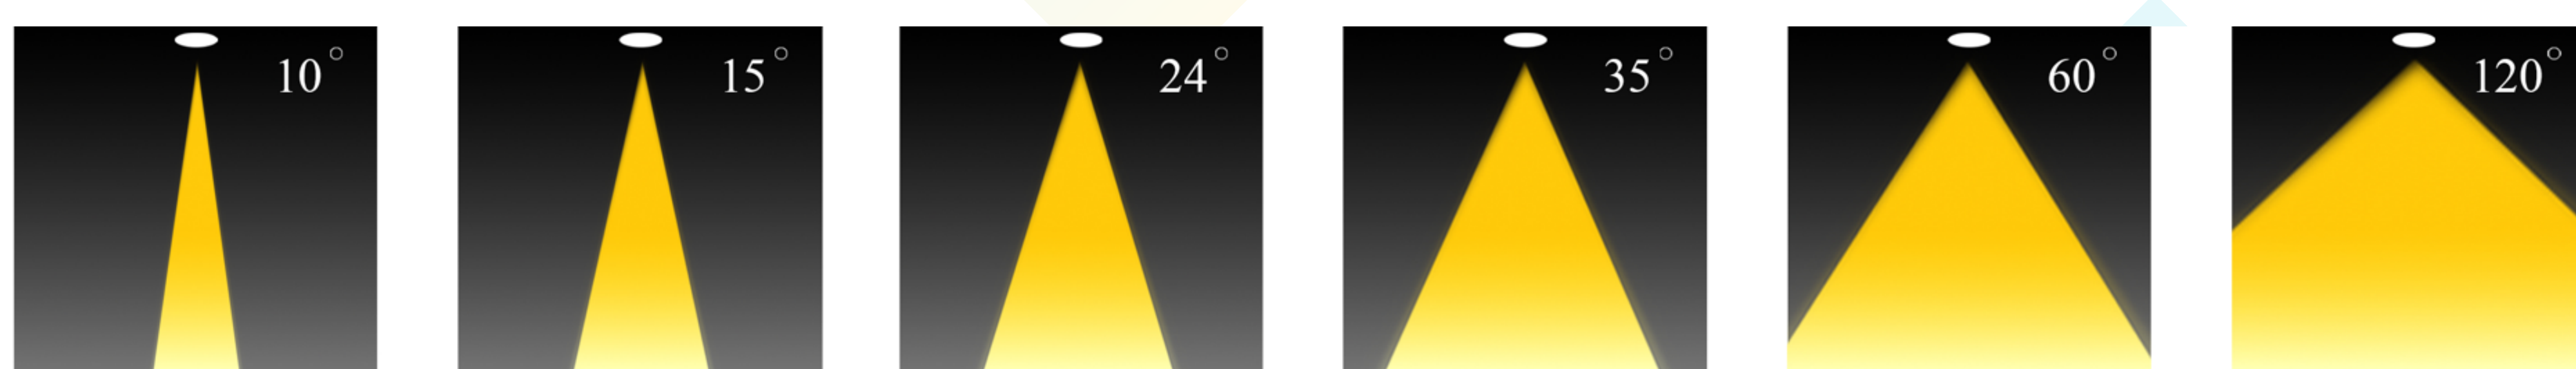



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xH mm	Driver	LED Chip	Weight Kg
50132XX8120LXXXX	100 150 200 240	140	3000 4000 6500	354x144 mm	Lifud Philips	Lumileds	5.080

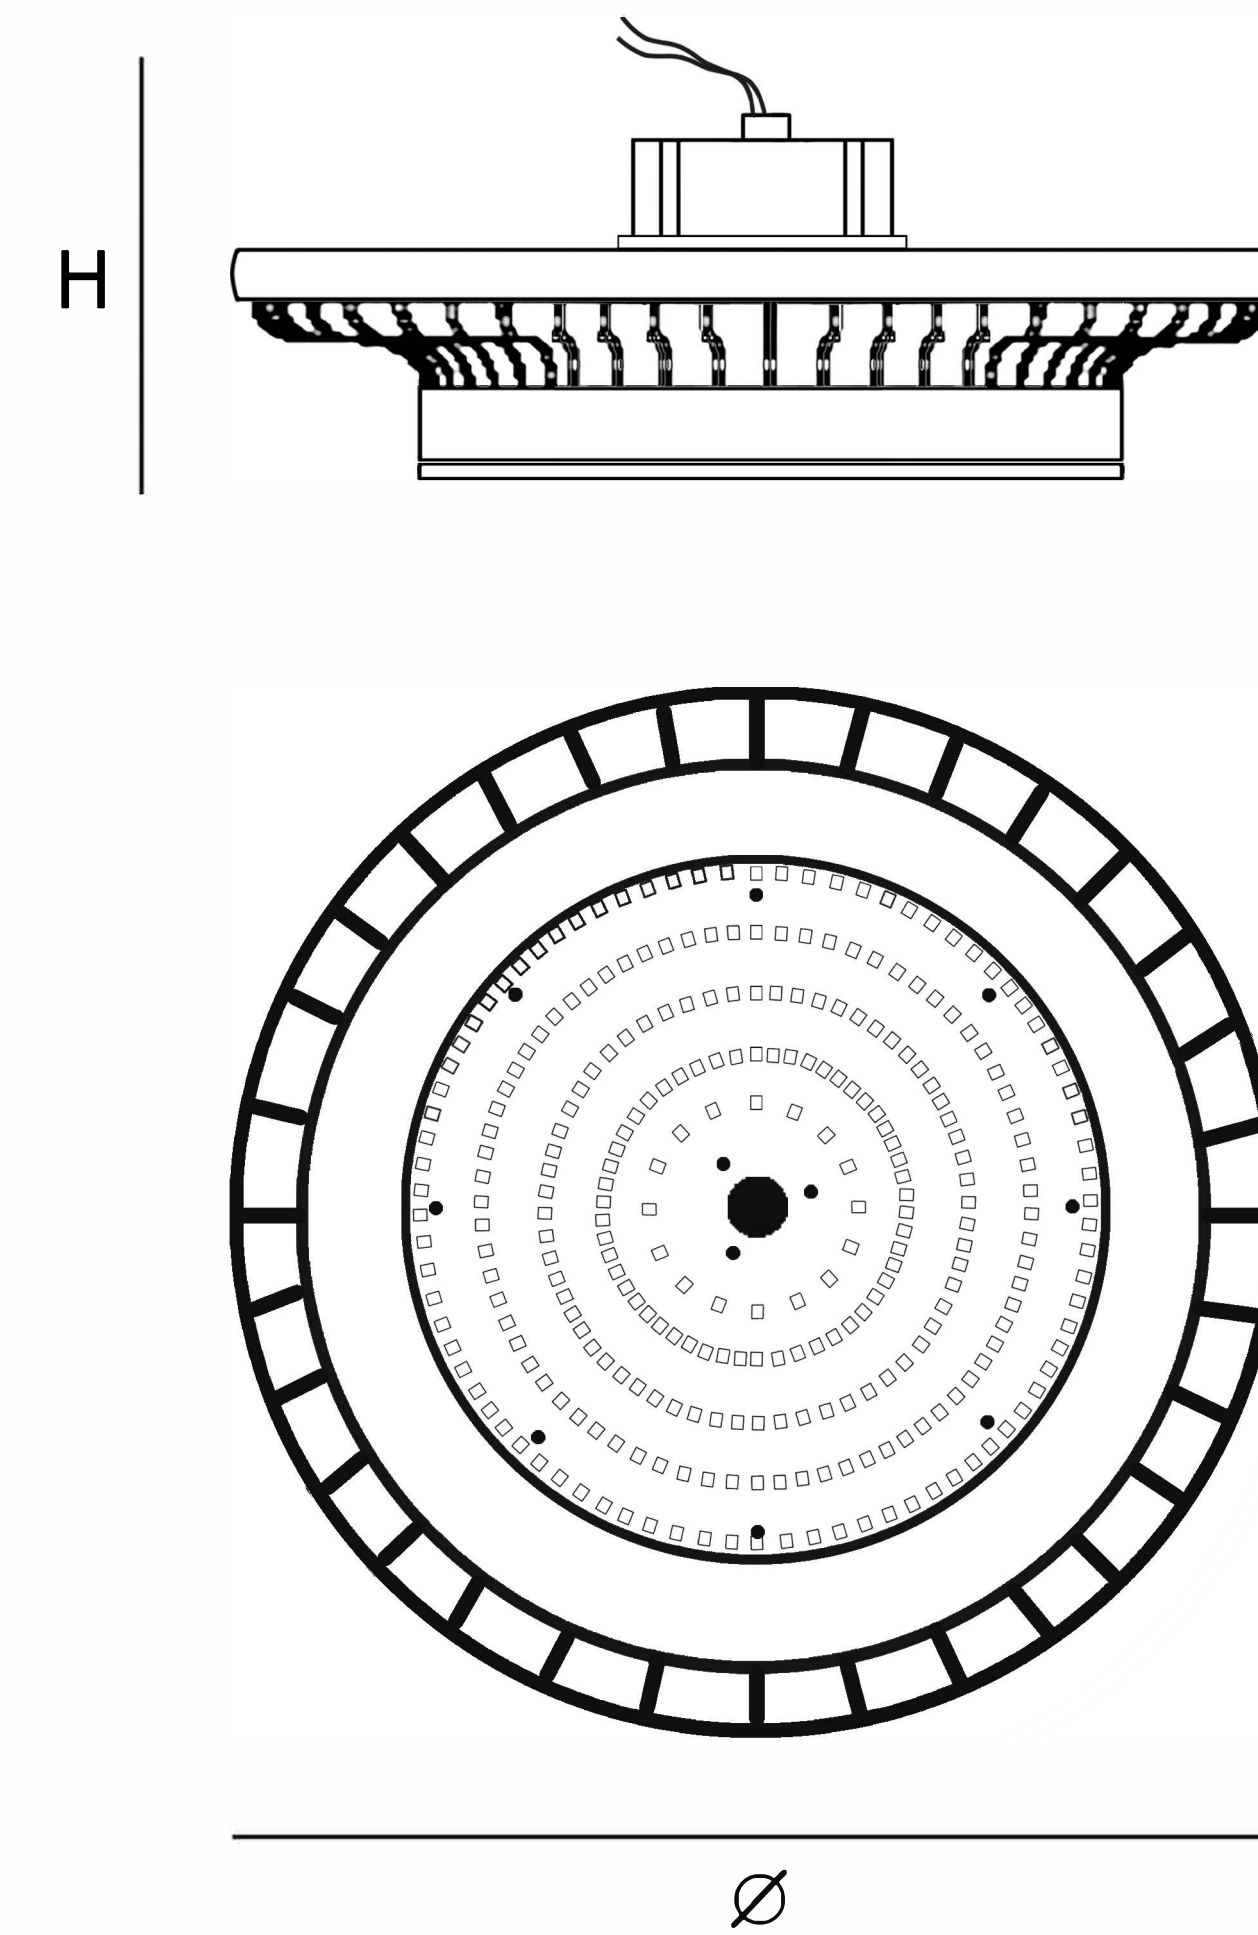

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

DALI

IK10

## POLAR CURVE

