

# Surface Downlight

SLT-5555



## PERFORMANCE DATA

**Efficacy :** 125 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 4000K

**Life Time :** 50.000 hrs

**Optic :** 35°

**Class :** II

## MECHANICAL SPECIFICATIONS

**Material :** Die Cast Aluminum

**Mounting :** Surface mounted



**Lens :** Glass

**Finish :** White

**Protection Class :** IP 54


**Mechanical Resistance :** IK 08

## OPTICS

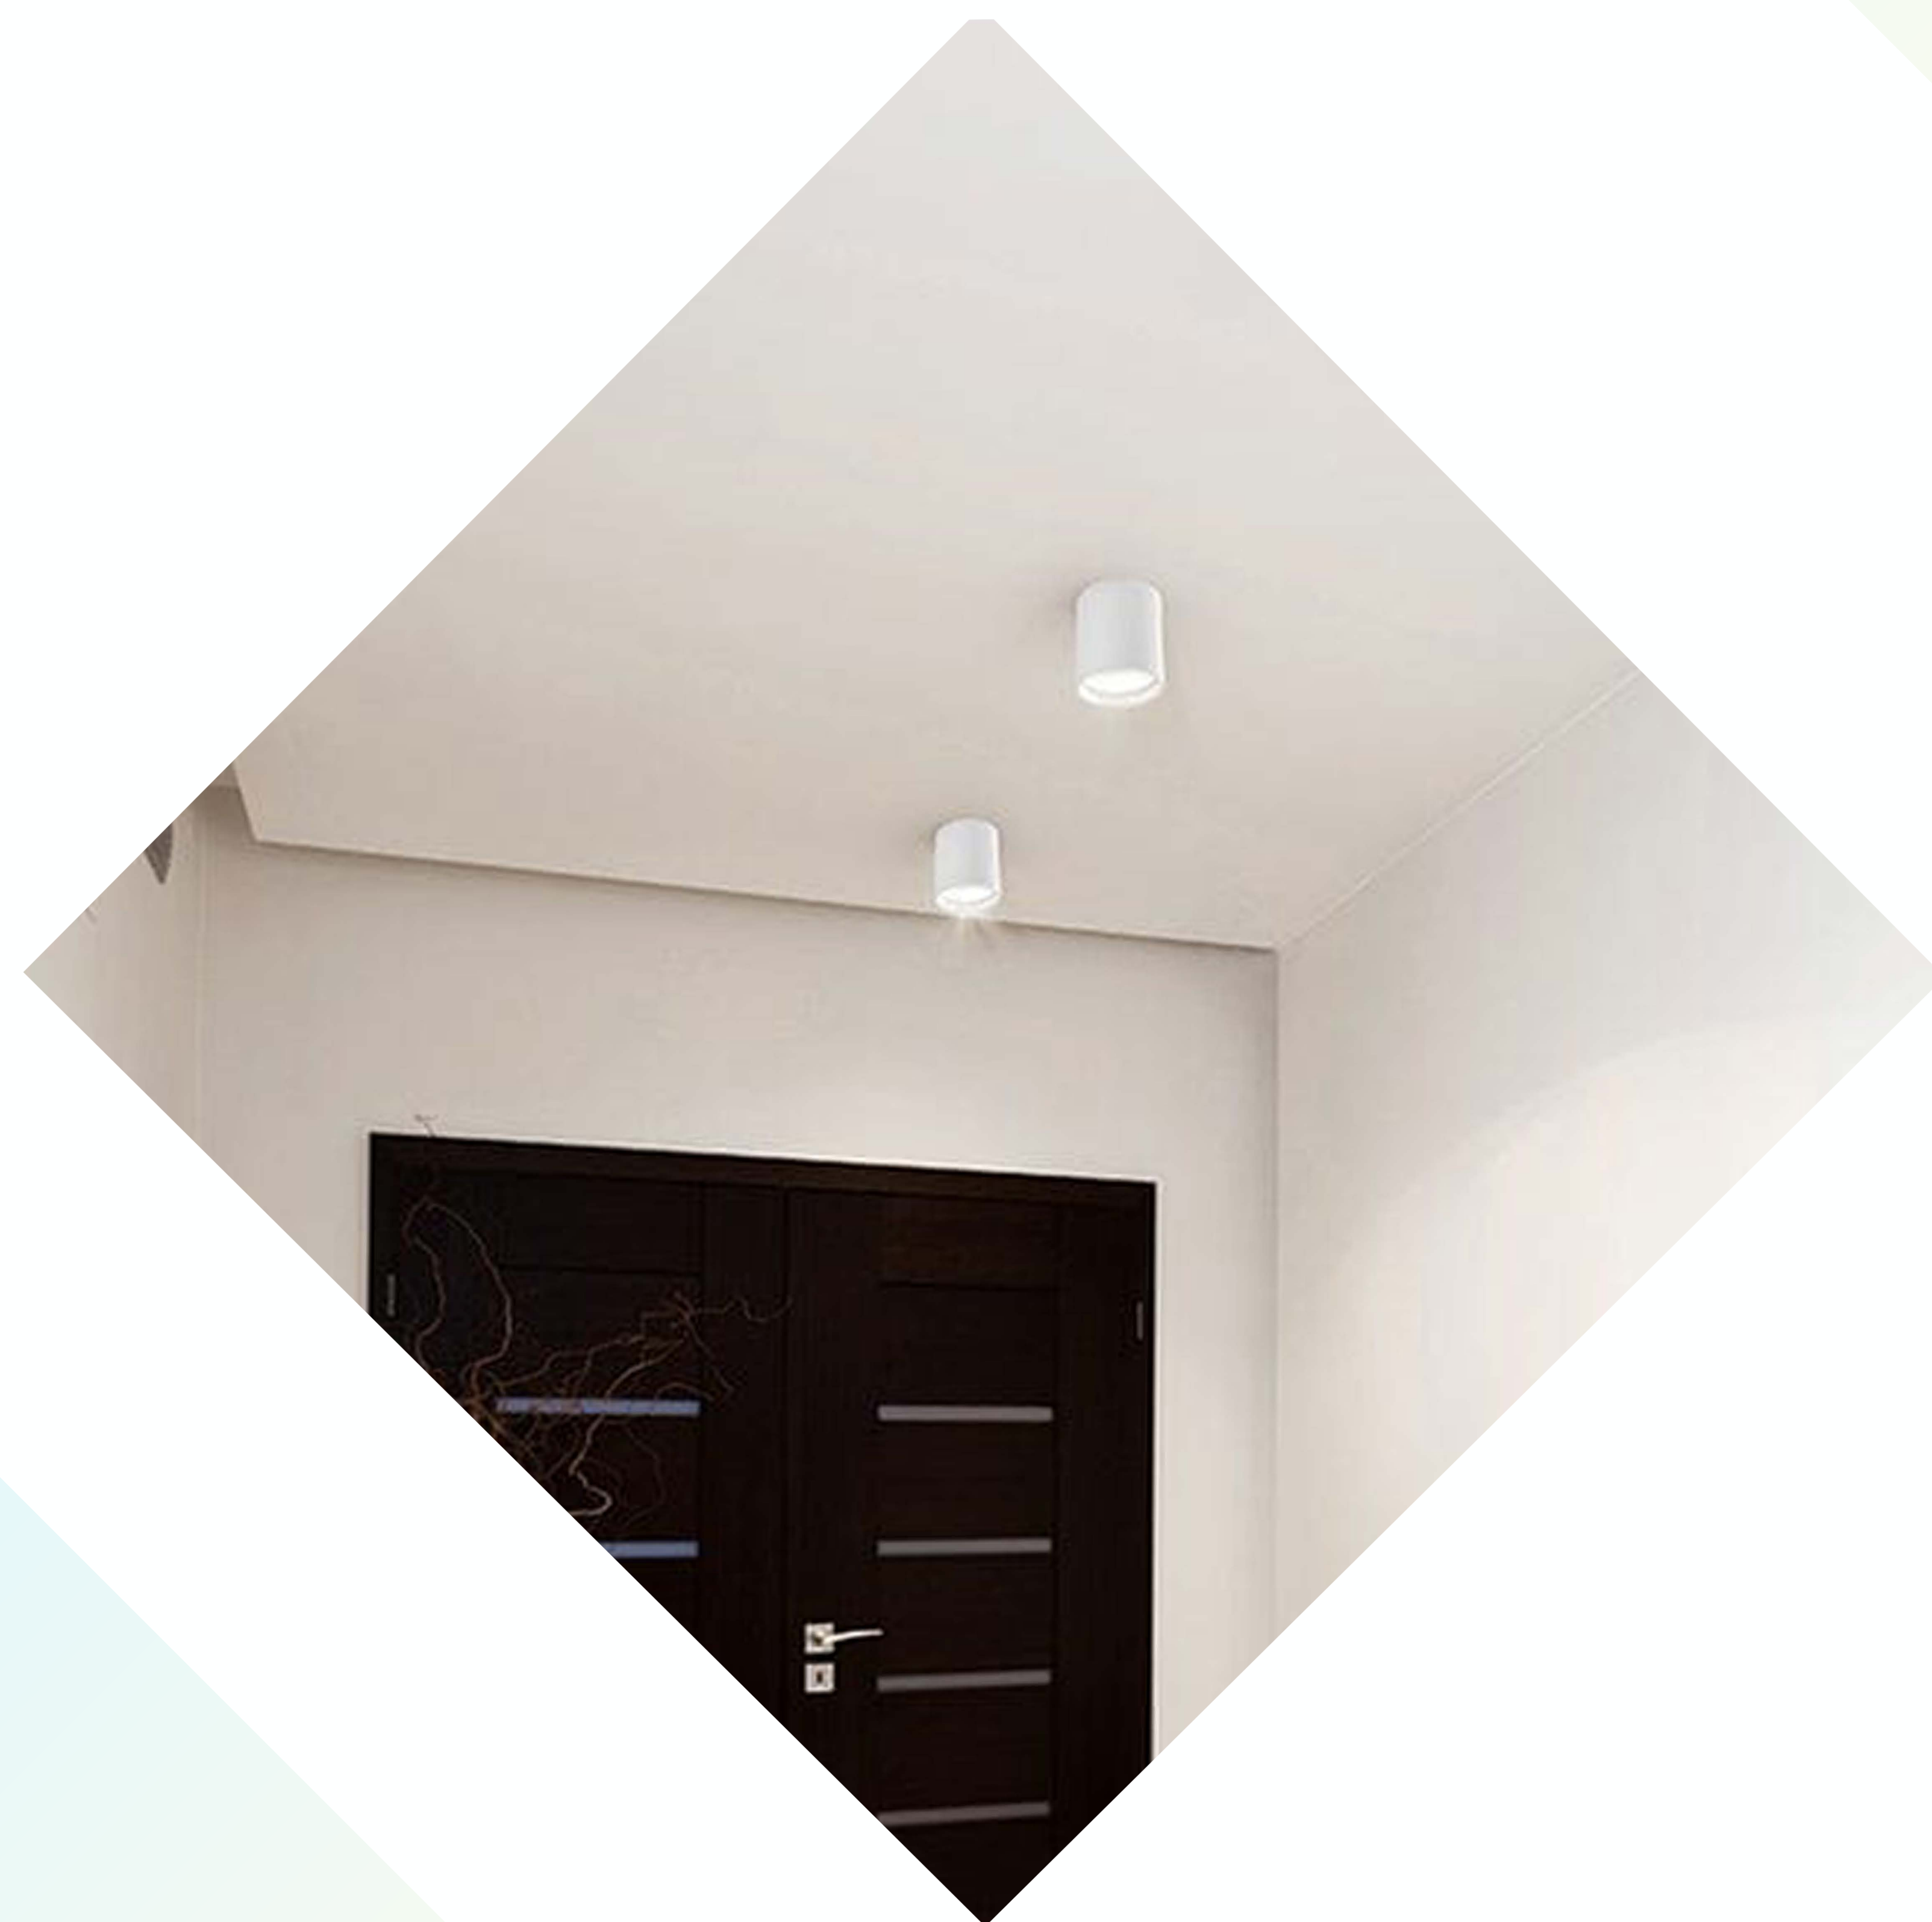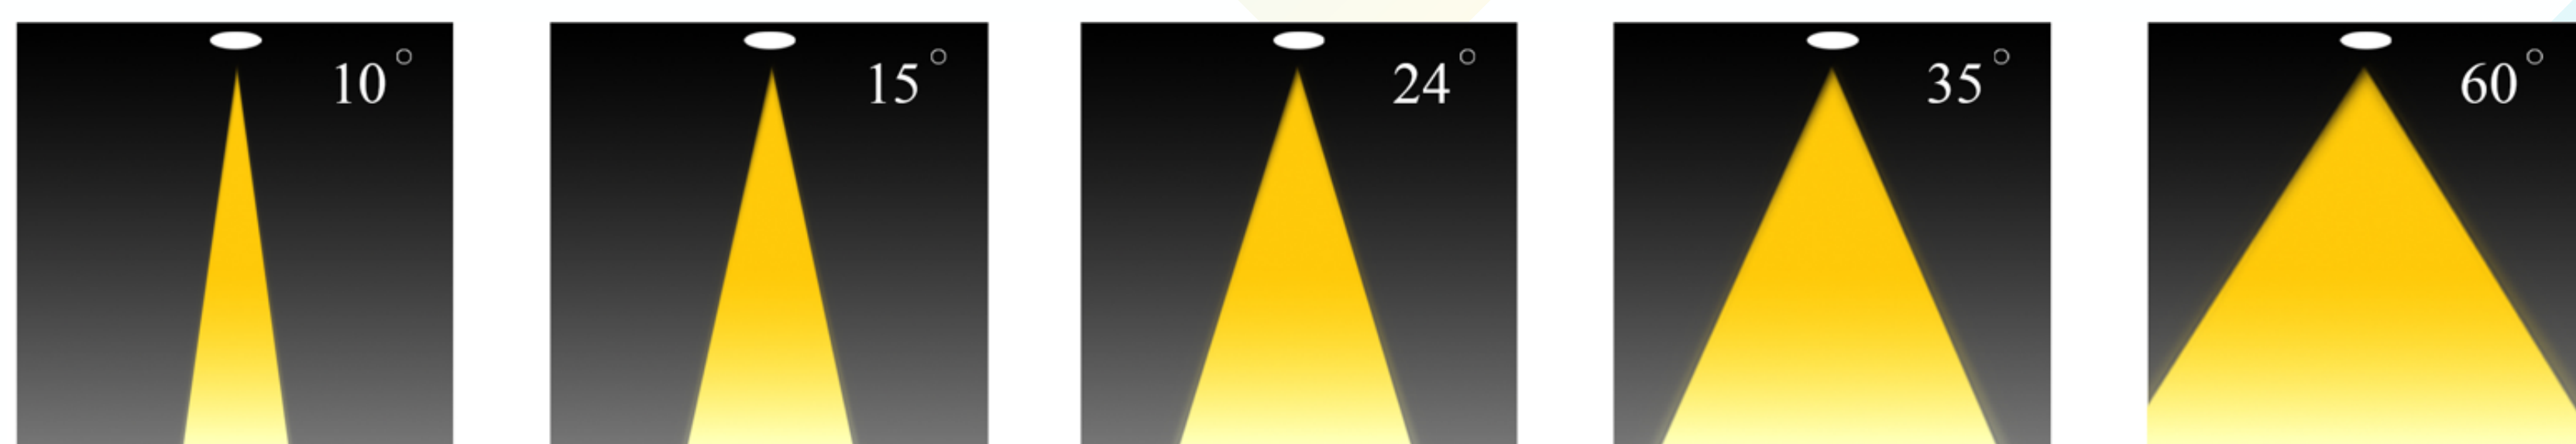



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ mm	Driver	LED Chip	Weight
5551XX8XXXCXXXX	24 30	90 125	3000 4000 6500	195 mm	Tridonic Lifud	Cree	

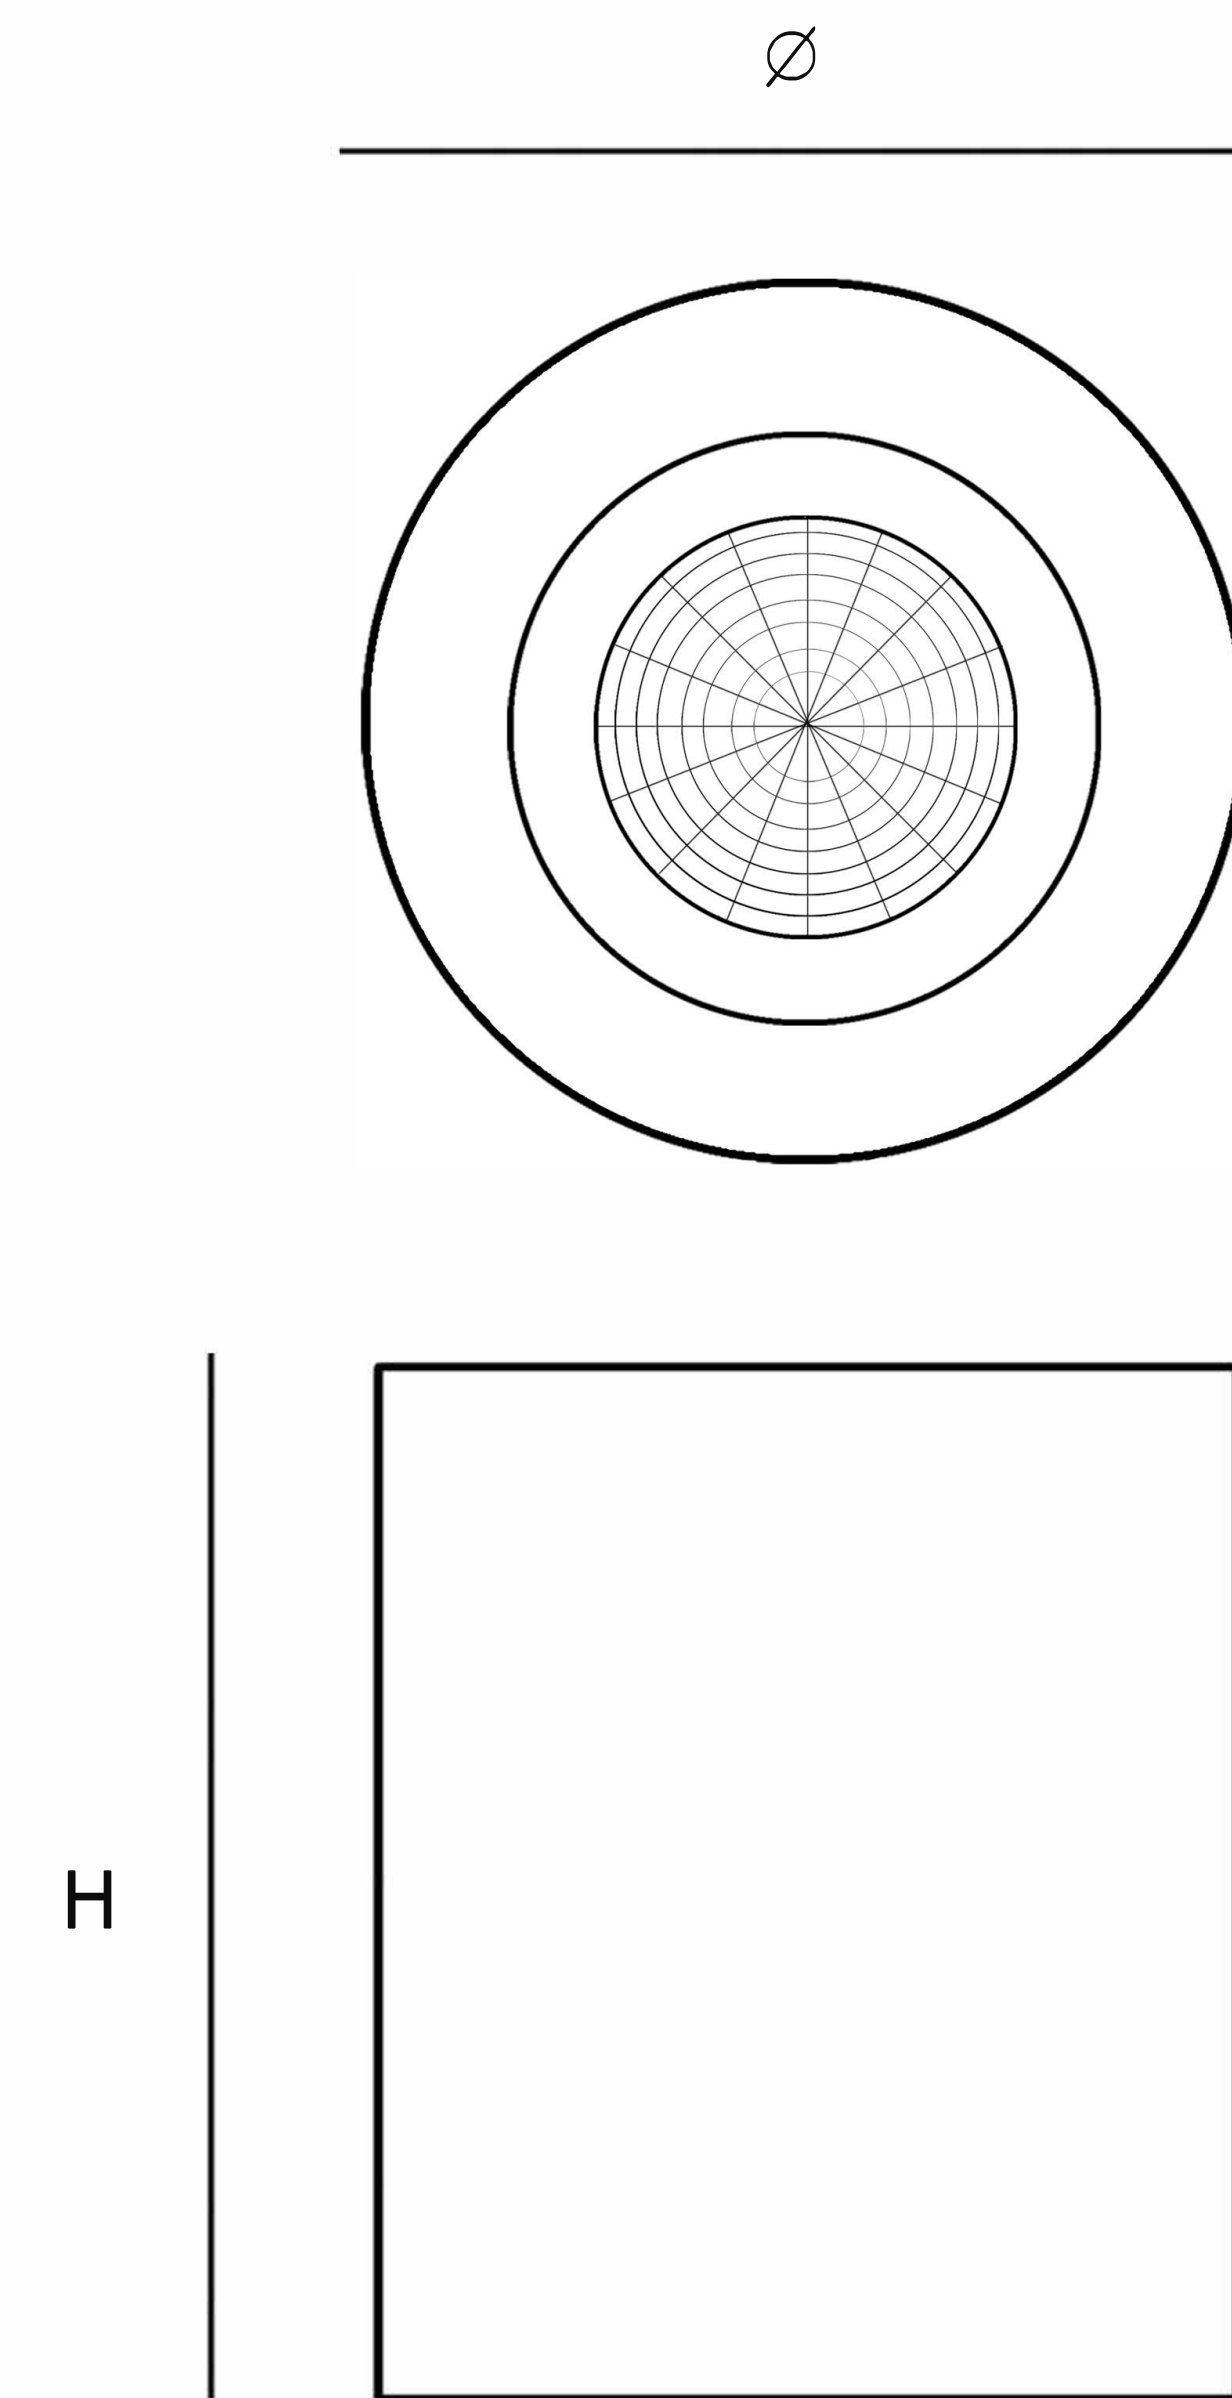

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

