

Surface Downlight

SLT-5556



PERFORMANCE DATA

Efficacy : 90-125 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 24°

Class : II

MECHANICAL SPECIFICATIONS

Material : Die Cast Aluminium

Mounting : Surface mounted



Lens : Glass

Finish : White


Protection Class : IP 54

Mechanical Resistance : IK 08

OPTICS

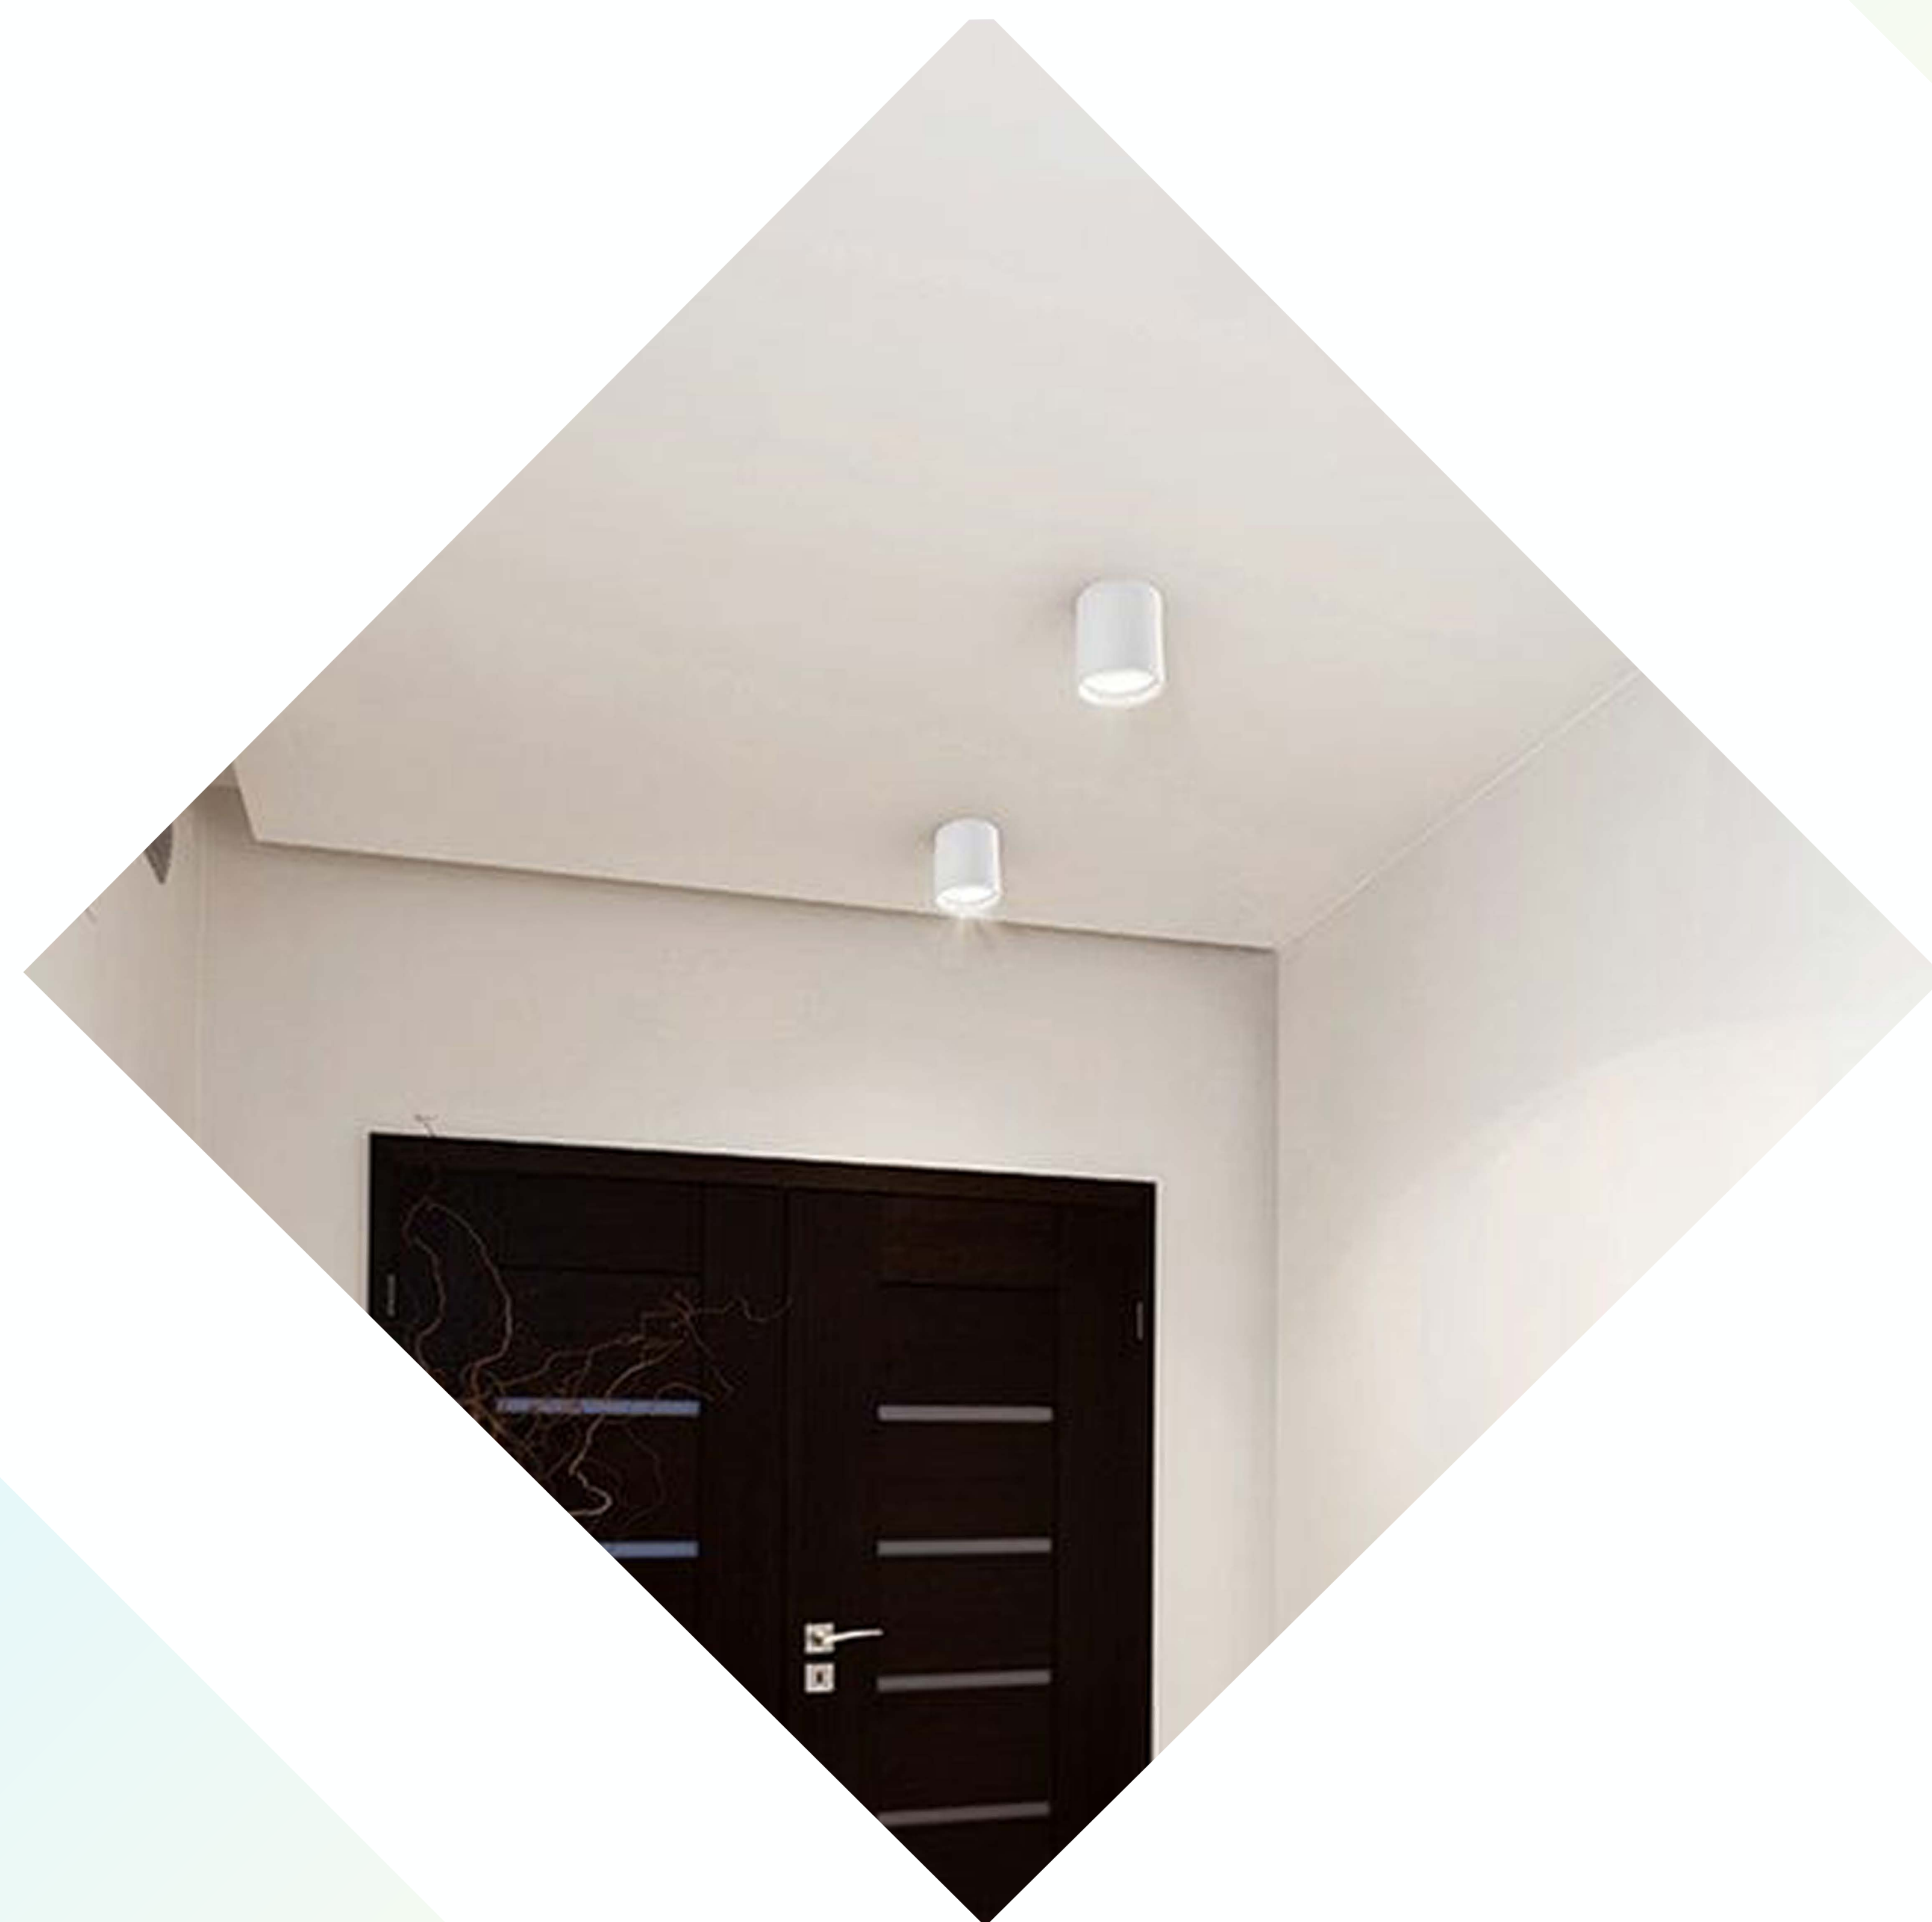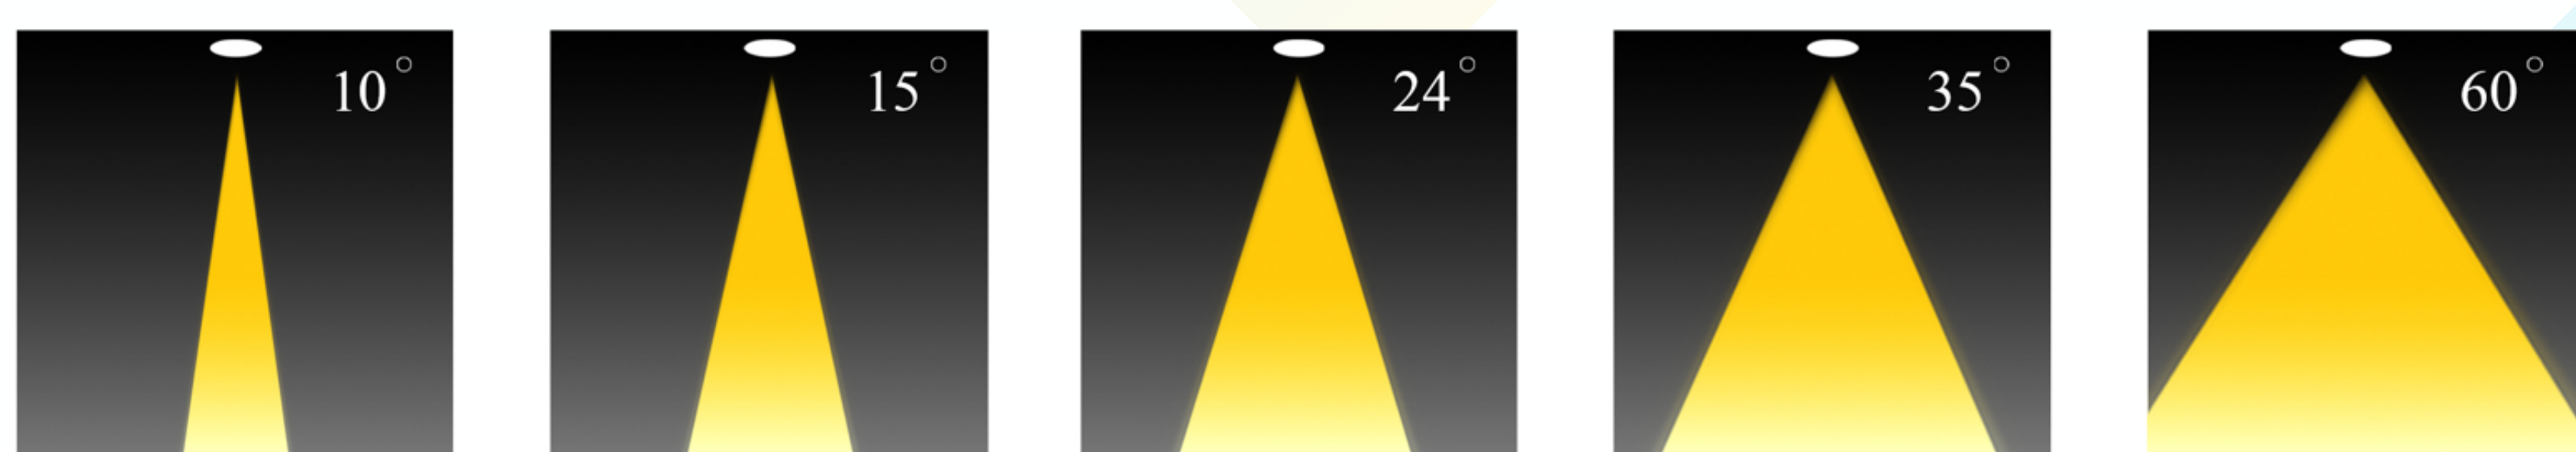

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø mm	Driver	LED Chip	Weight
5561XX8XXXCXXXX	10	90	3000	130 mm	Tridonic	Cree	
	14	125	4000		Lifud		
	15		6500		CE		

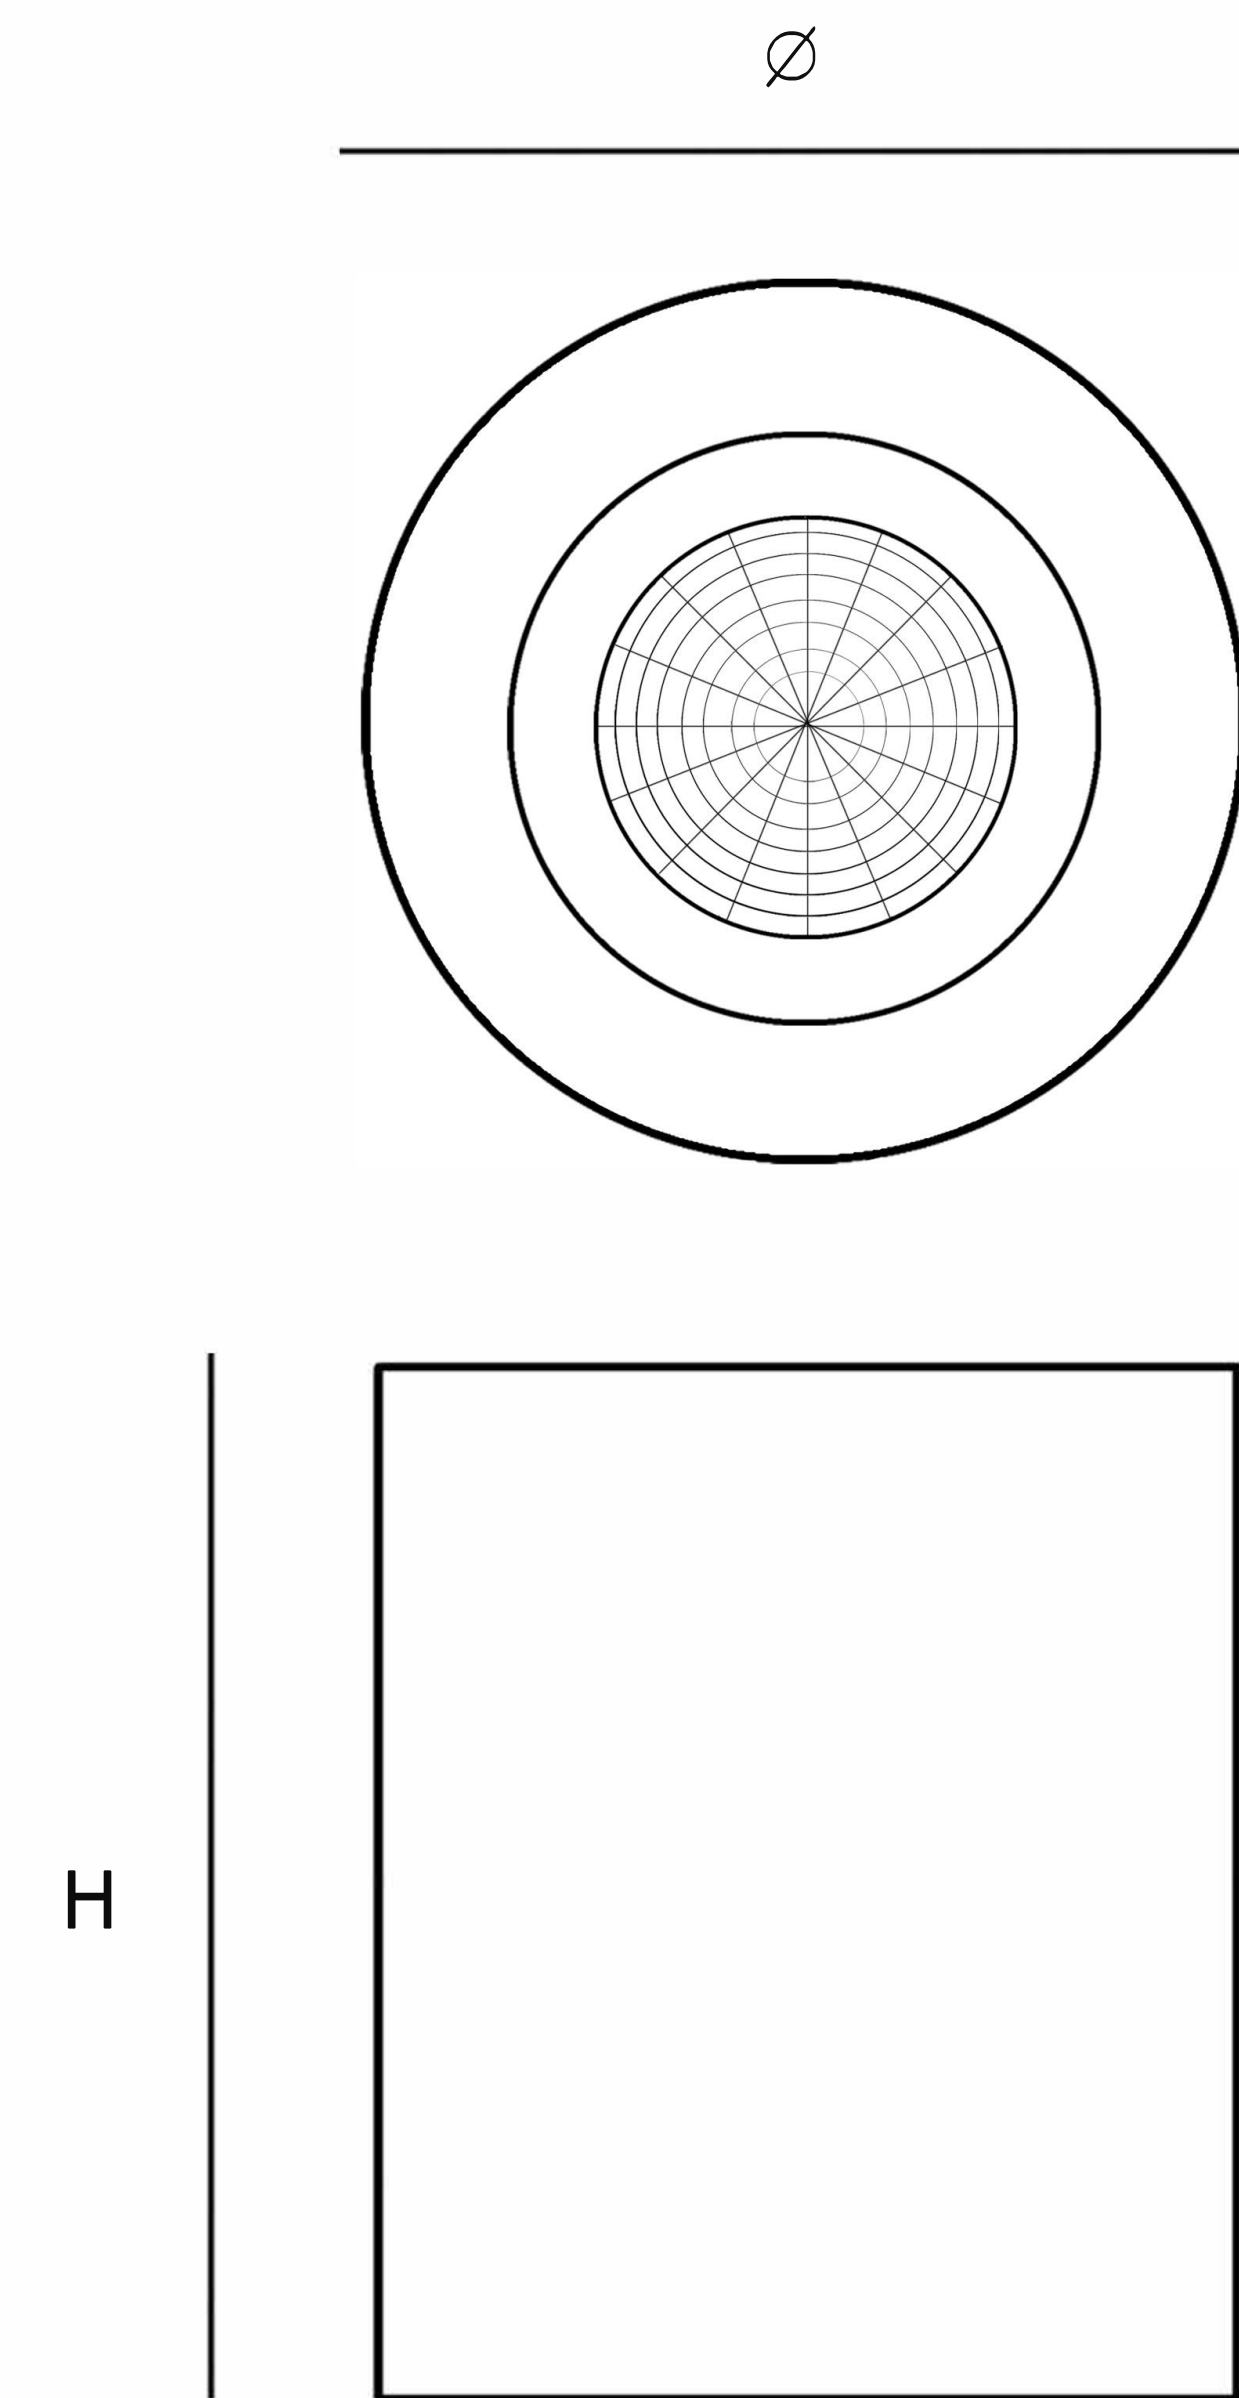

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

