

# Pole Light

SLT-6608



## PERFORMANCE DATA

**Efficacy :** 120 Lm/W

**Input Voltage :** 220 - 240V

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Die Cast Aluminum - Galvanized steel body

**Mounting :** Pole Mounted



**Lens :** Opal

**Finish :** Gray


**Protection Class :** IP 65

**Mechanical Resistance :** IK 08

## OPTICS

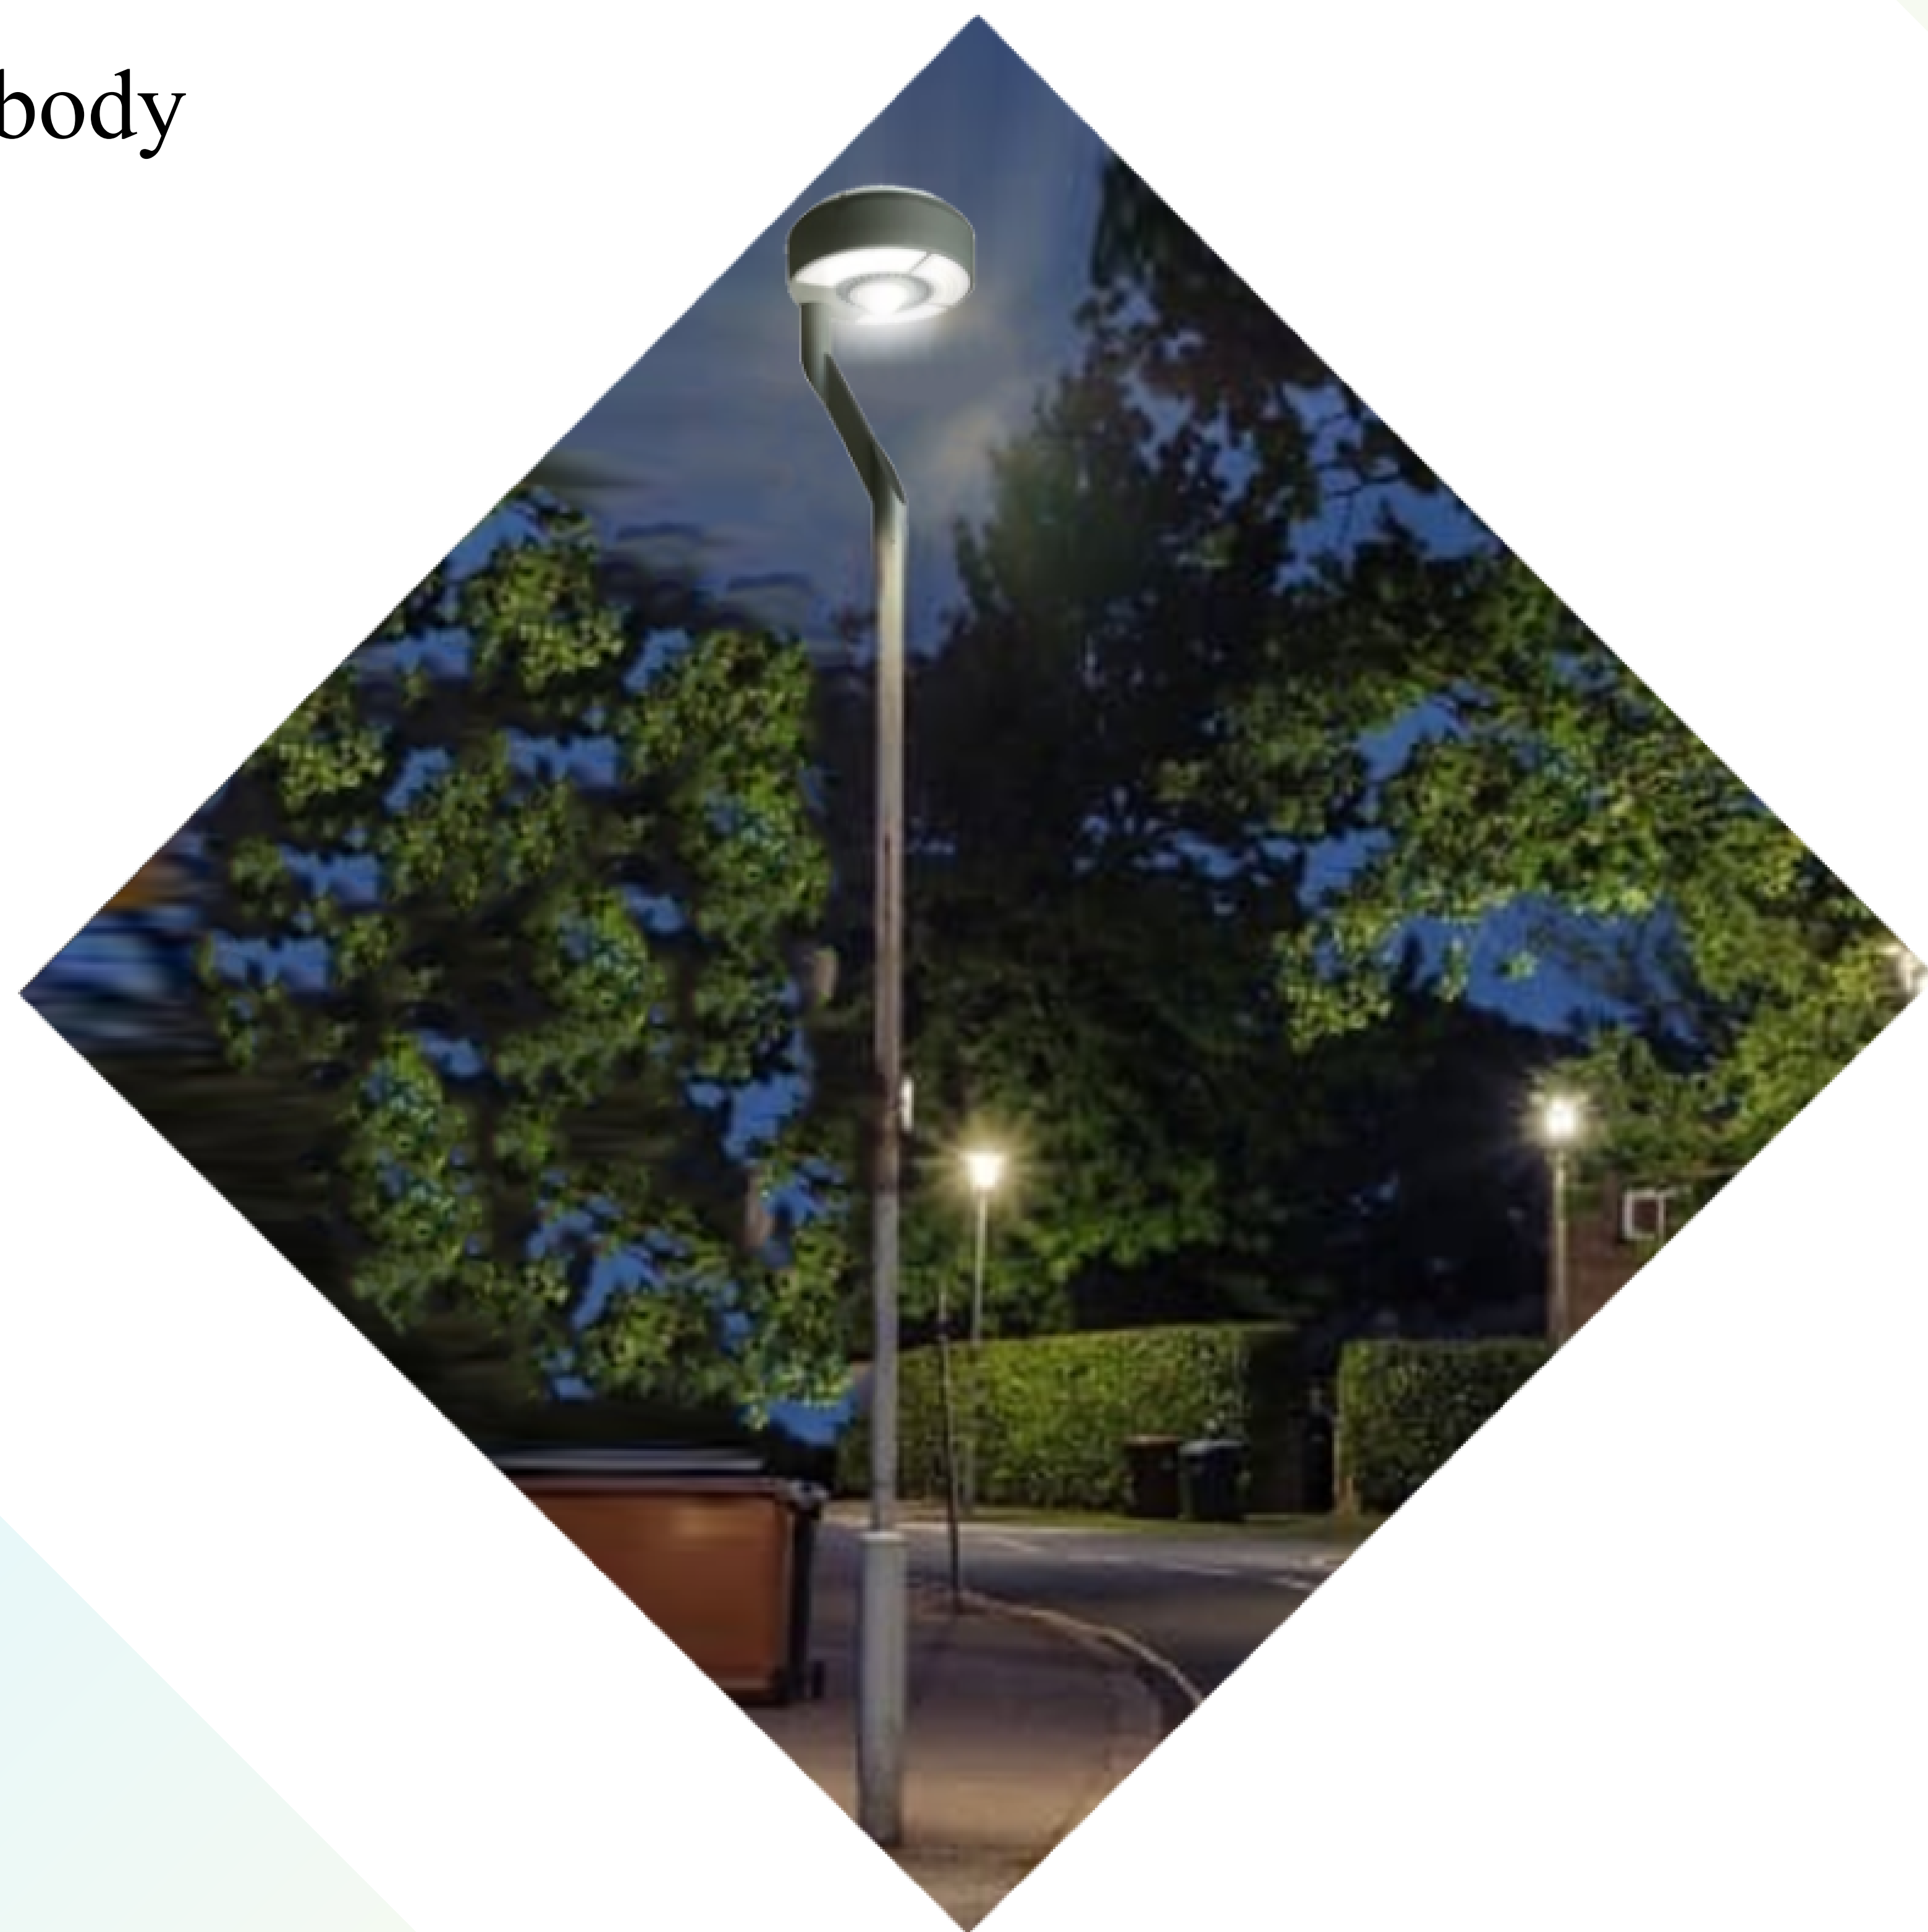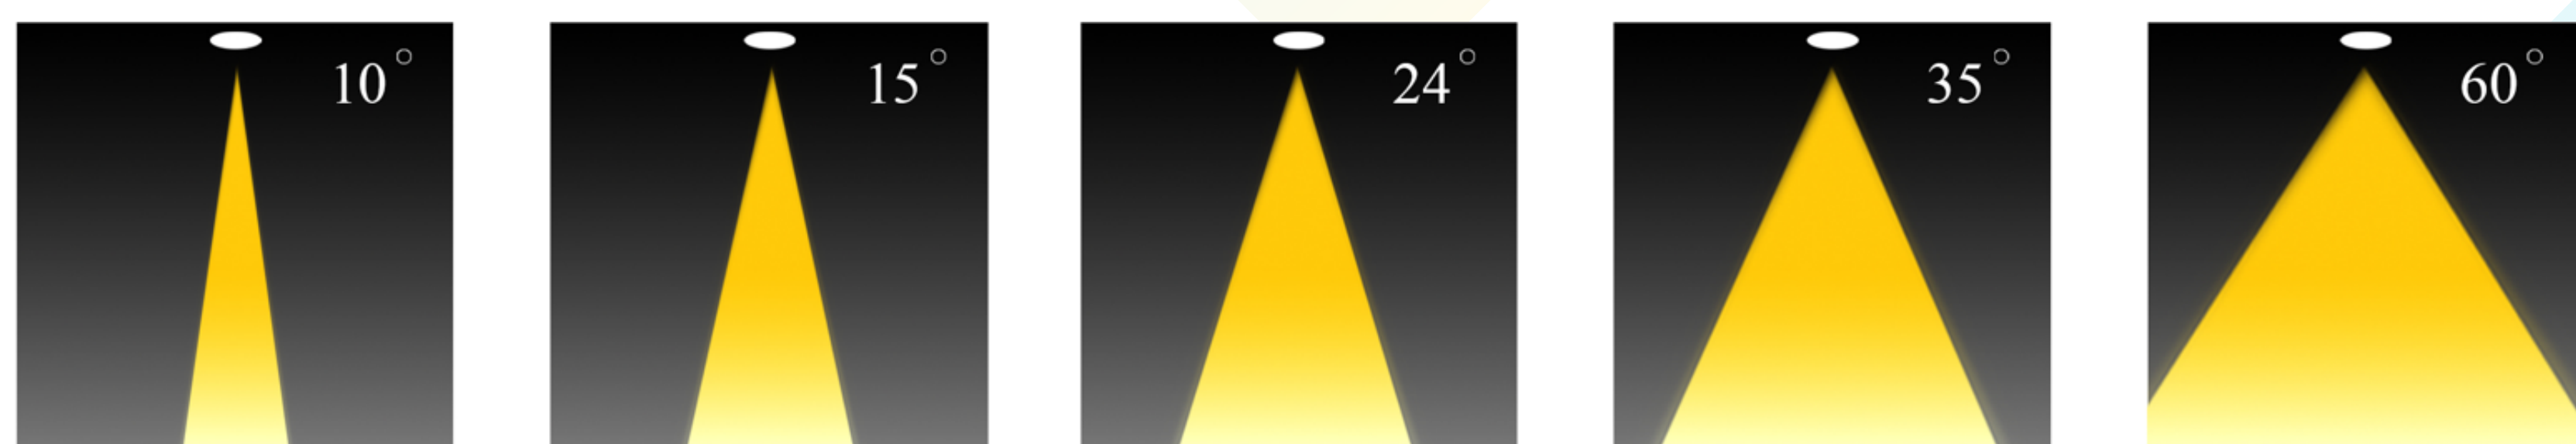

| Code             | Power<br>W                 | Efficacy<br>Lm/W | Colour Temp.<br>K | Dimensions<br>Ø xH mm | Driver   | LED Chip |
|------------------|----------------------------|------------------|-------------------|-----------------------|----------|----------|
| 6608330XXXXCMXXX | 30<br>35<br>40<br>45<br>50 | 120              | 3000              |                       | Meanwell | Cree     |

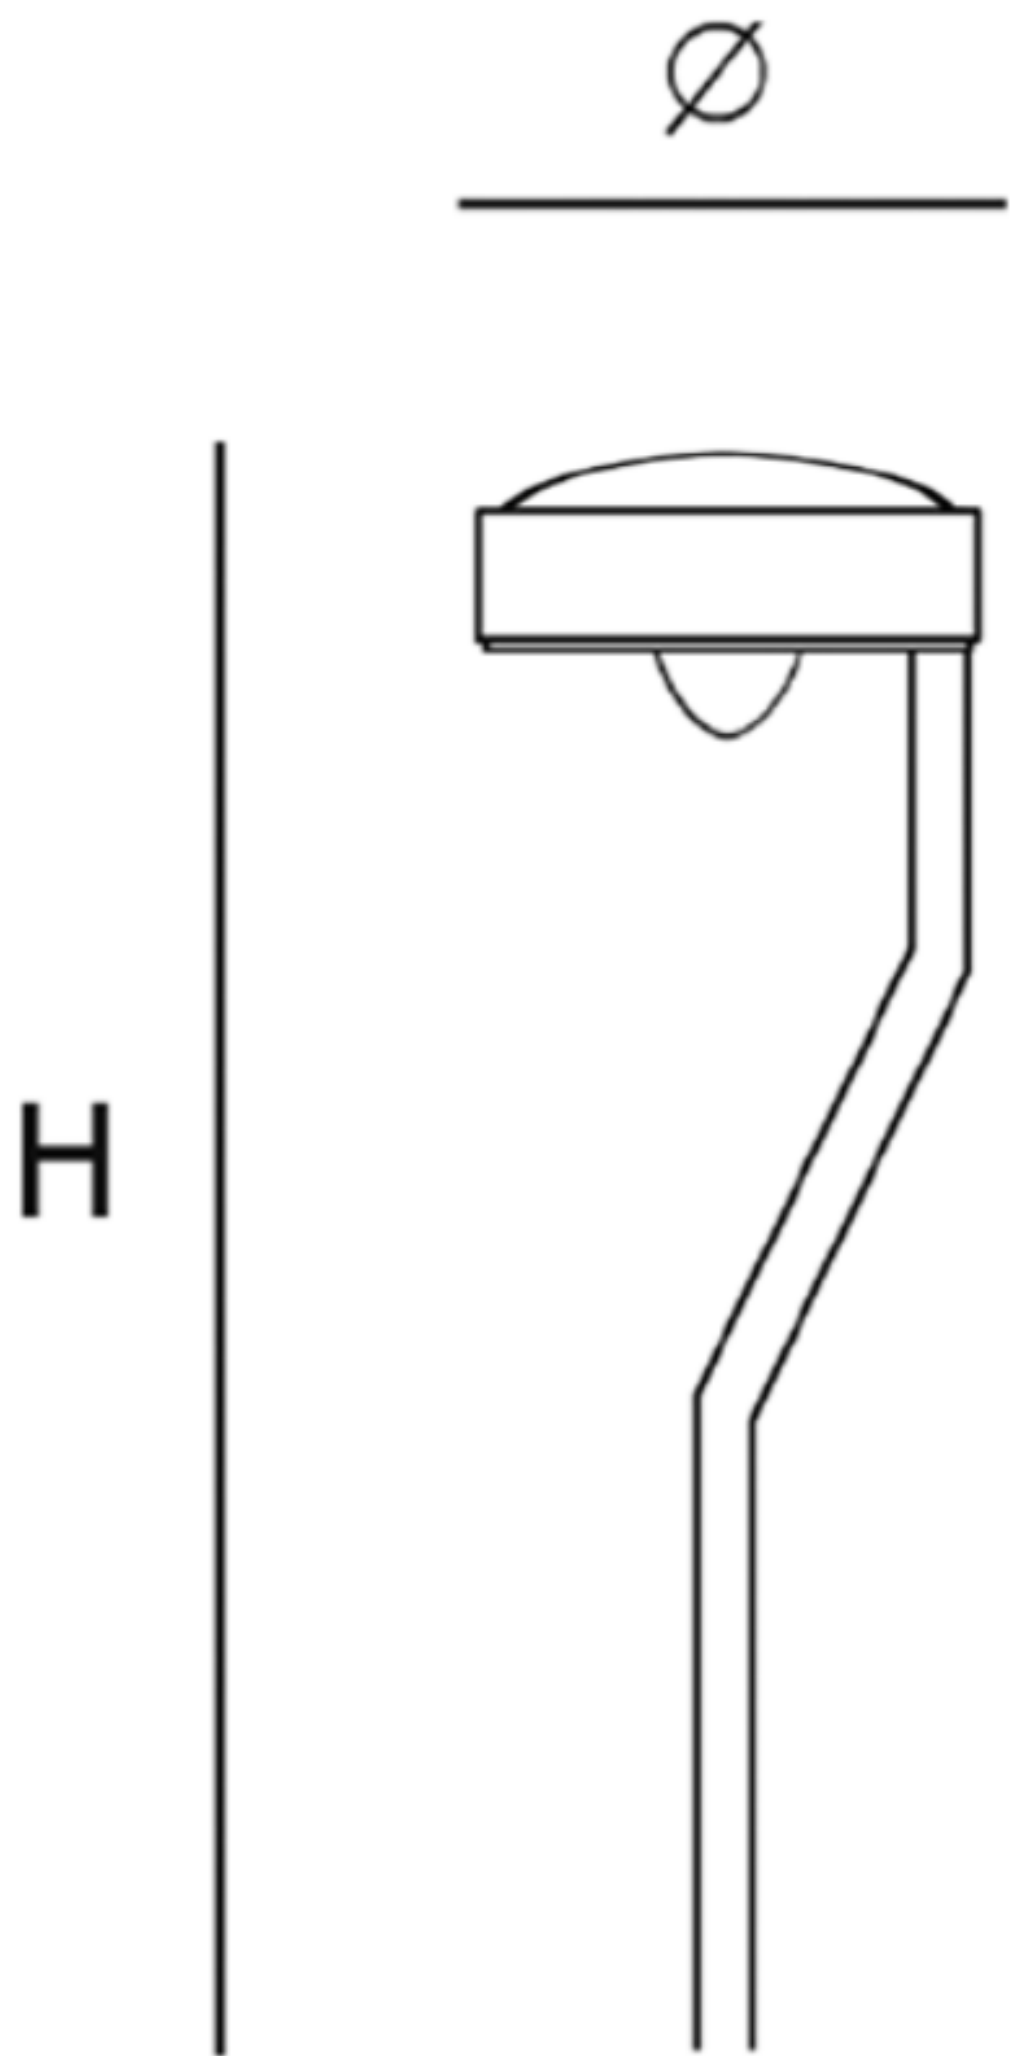

## CUSTOMISZE OPTIONS

3K

Light Temperature  
3000K

4K

Light Temperature  
4000K

6.5K

Light Temperature  
6500K

CRI >80

Color Rendering Index >80

FINISH

Black

DALI

## POLAR CURVE

