

Step light

SLT-6704



PERFORMANCE DATA

Efficacy : 73 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 97°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast

Mounting : Wall Recessed Mounted Step Light


Lens : Frost Glass

Finish : Gray

Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

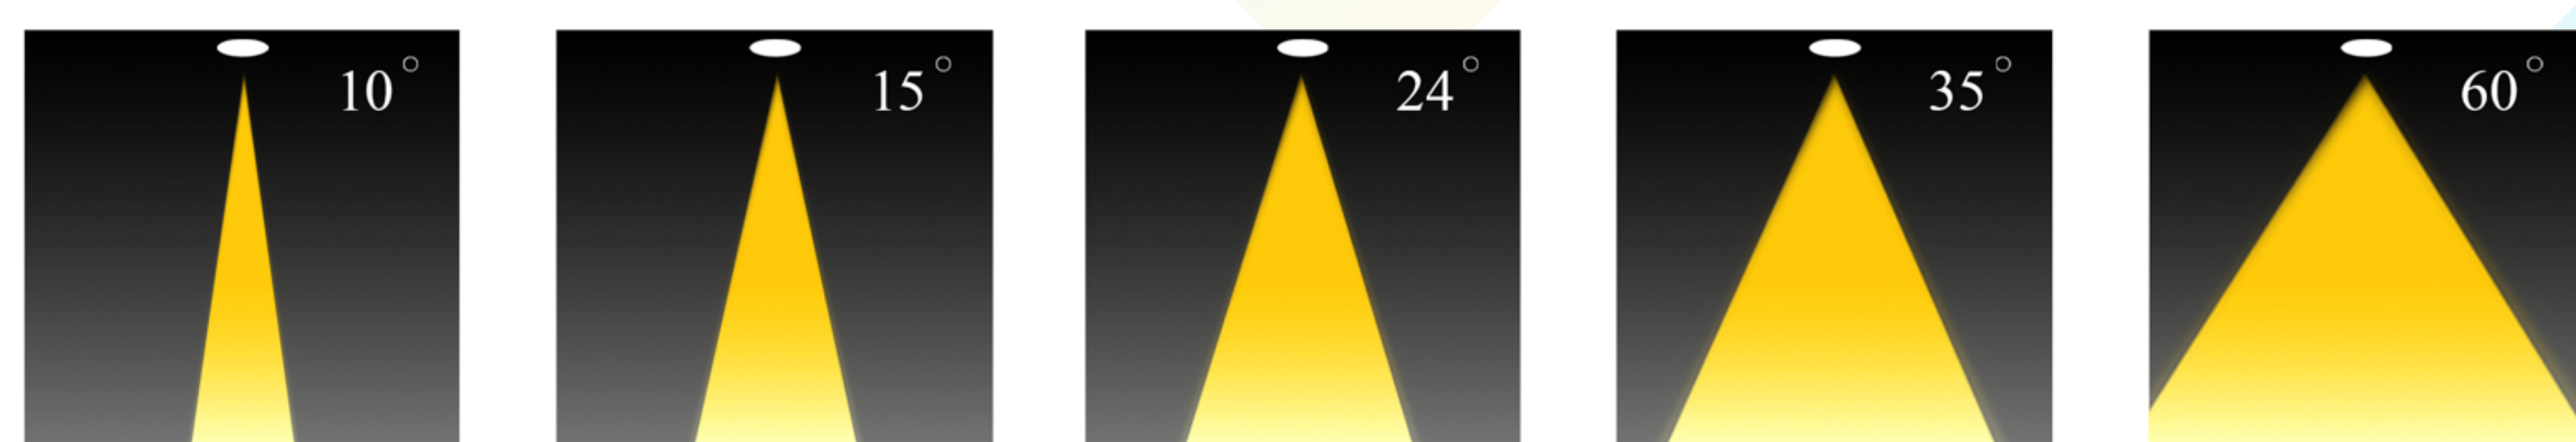

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxPxH mm	Driver	LED Chip	Weight Kg
6704330X097MTXXX	6 / 7 8 / 9 10 / 14	73	3000 4000	220x83x85 mm	Tridonic Done	MST	0.705



CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

