

EXIT SIGN

SLT-8801



PERFORMANCE DATA

Efficacy : 36 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 60°

Class : I

MECHANICAL SPECIFICATIONS

Material : Frame Acrylic Legend Panel

Mounting : Wall/Ceiling Mounted

Emergency Duration : > 3 hours


Viewing Distance : 25 m

Protection Class : IP 40


Mechanical resistance : IK 08

Battery : 3.6V 900 mAh-12pcs

OPTICS

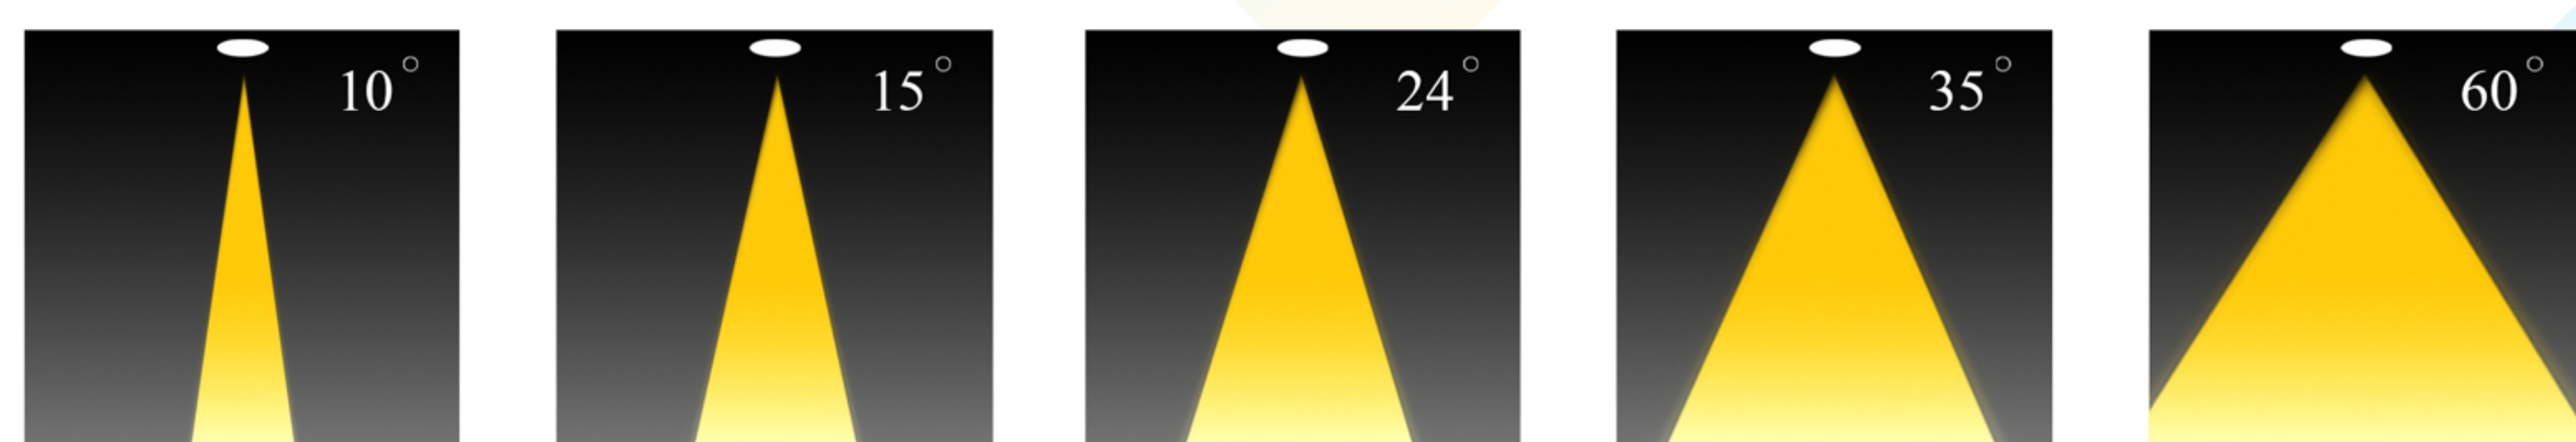

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	LED Chip	Weight
8801XX8000XX004	4.3	36	4000 6500	350*120	Built in Driver	Cree	

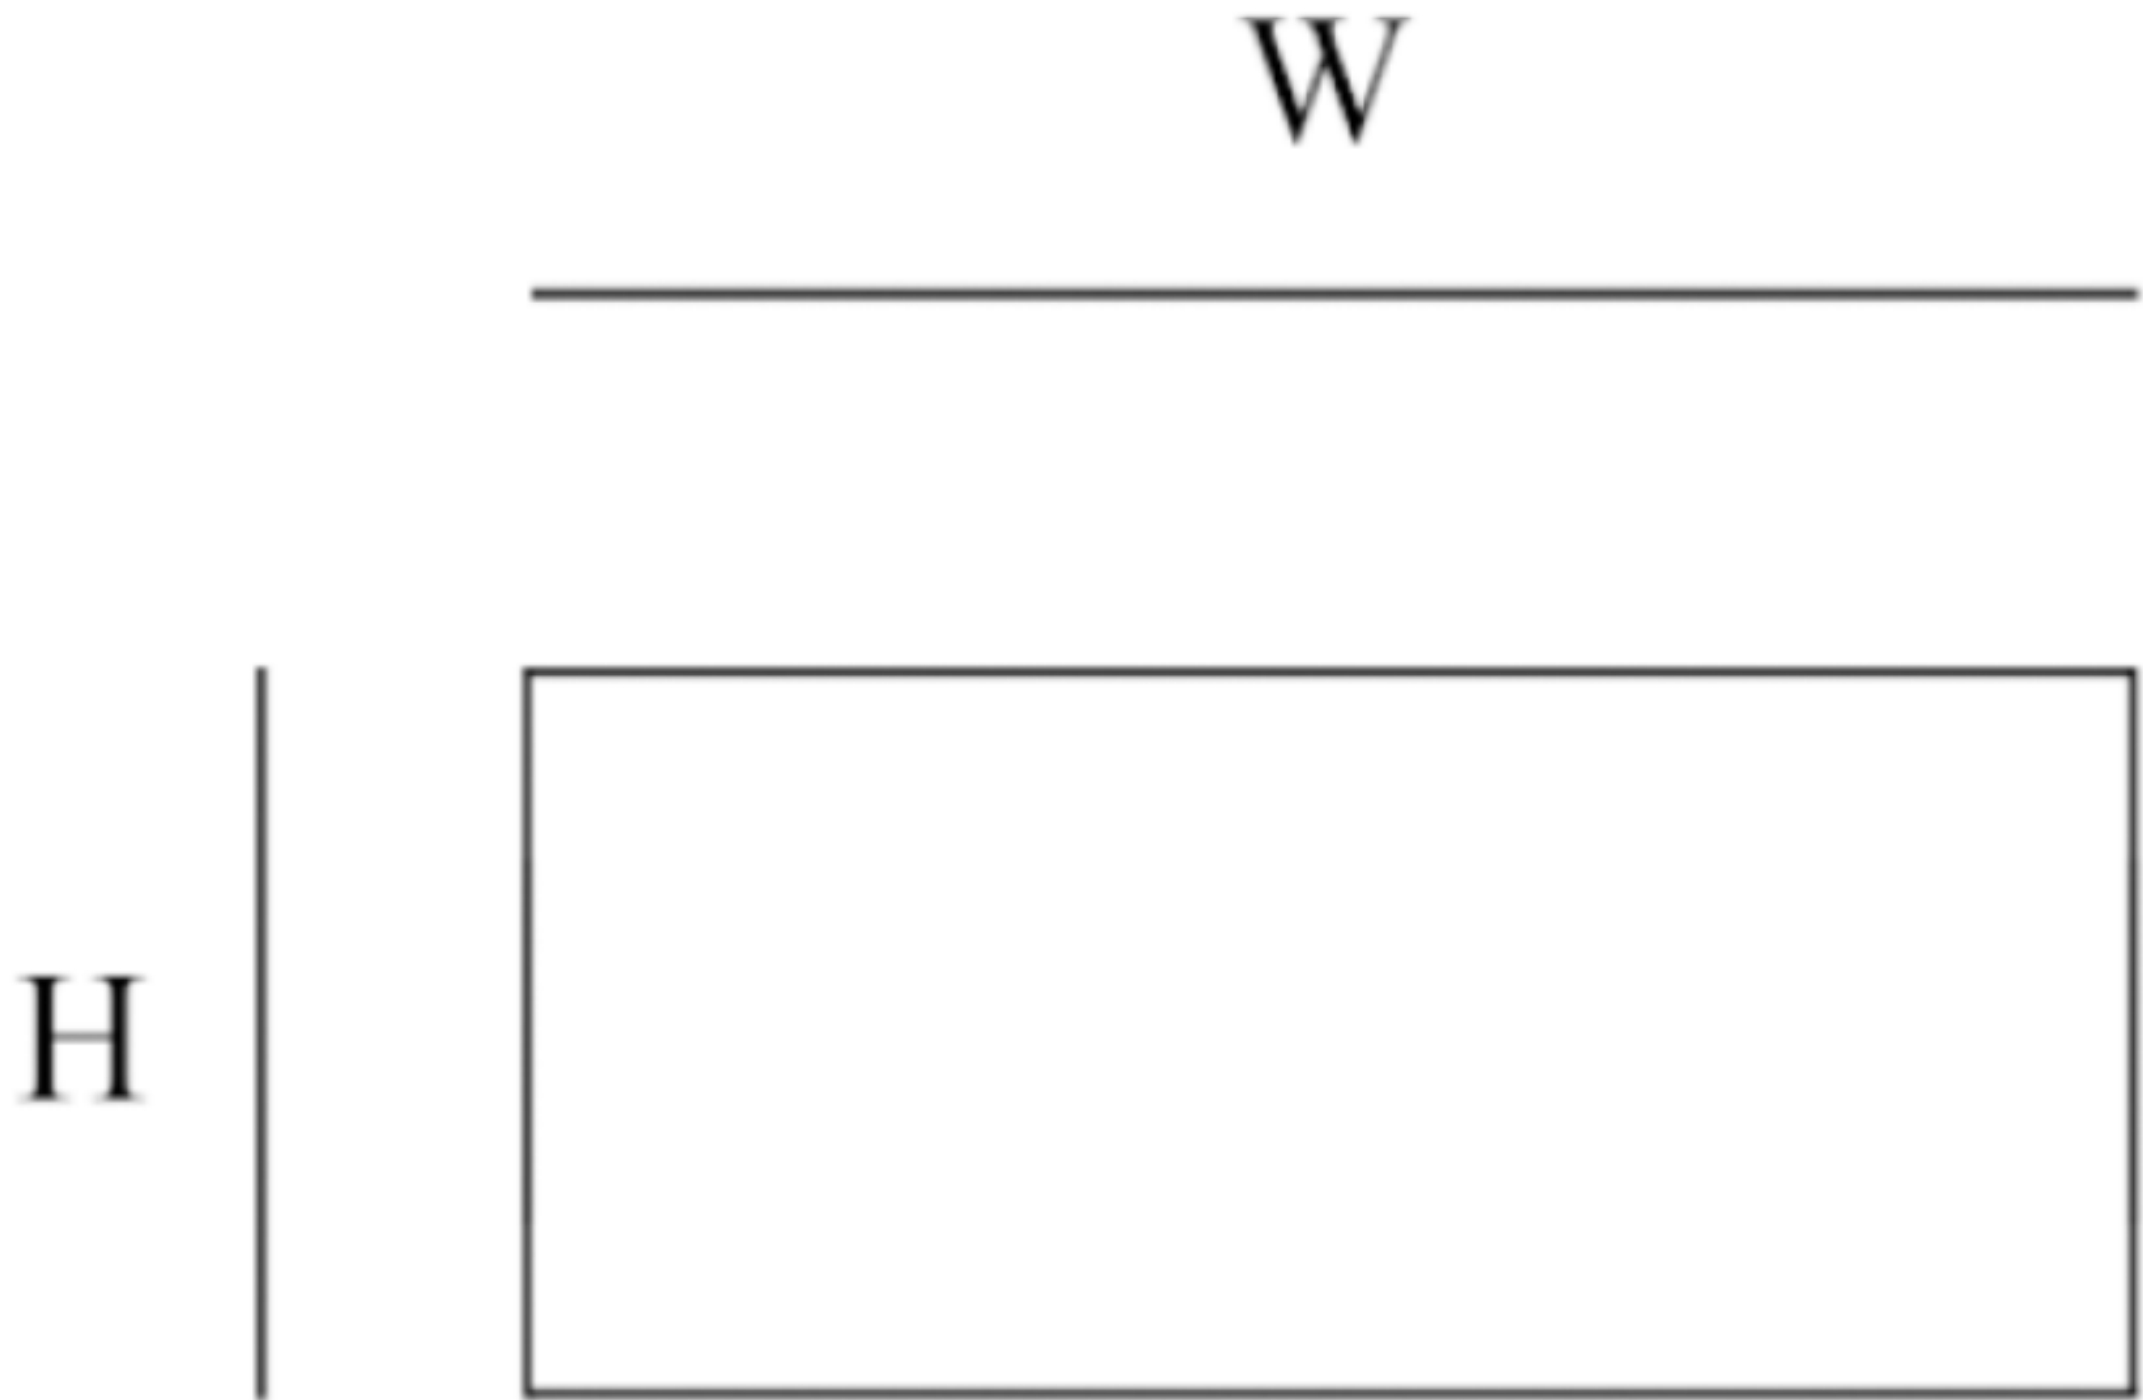

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

POLAR CURVE

