

Street Light

SLT-9018



PERFORMANCE DATA

Efficacy : 150 Lm/W

Input Voltage : 85 - 650V AC

Frequency : 50-60Hz

Color Rendering : CRI 70

Color Temperature : 6500 K

Life Time : 50.000 hrs

Optic : 120 °

Class : II

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum

Mounting : Pole mounted


Lens : PMMA | PC

Finish : Gray (RAL 9002 | RAL7040)


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

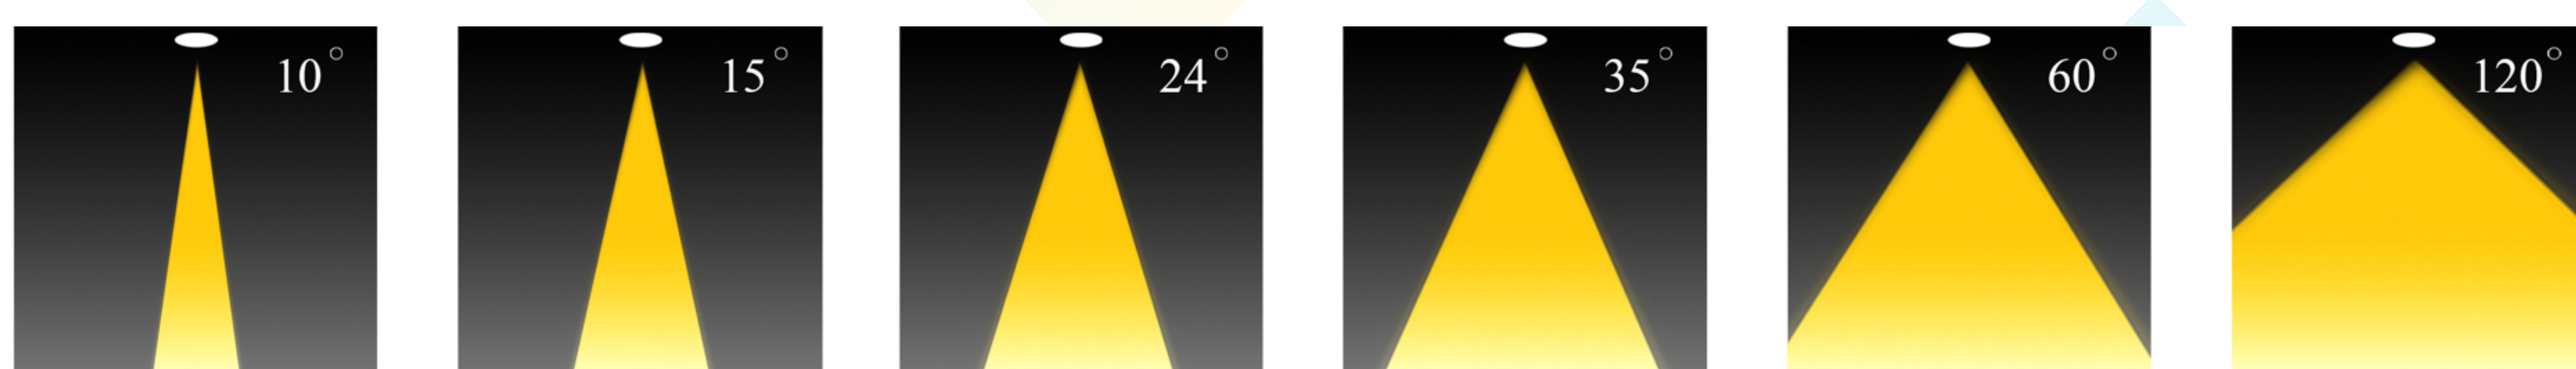

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Weight
90183XX8XXXLX050	50	150	4000 6500	490×212×102	Moso Philips CE	Lumiled	

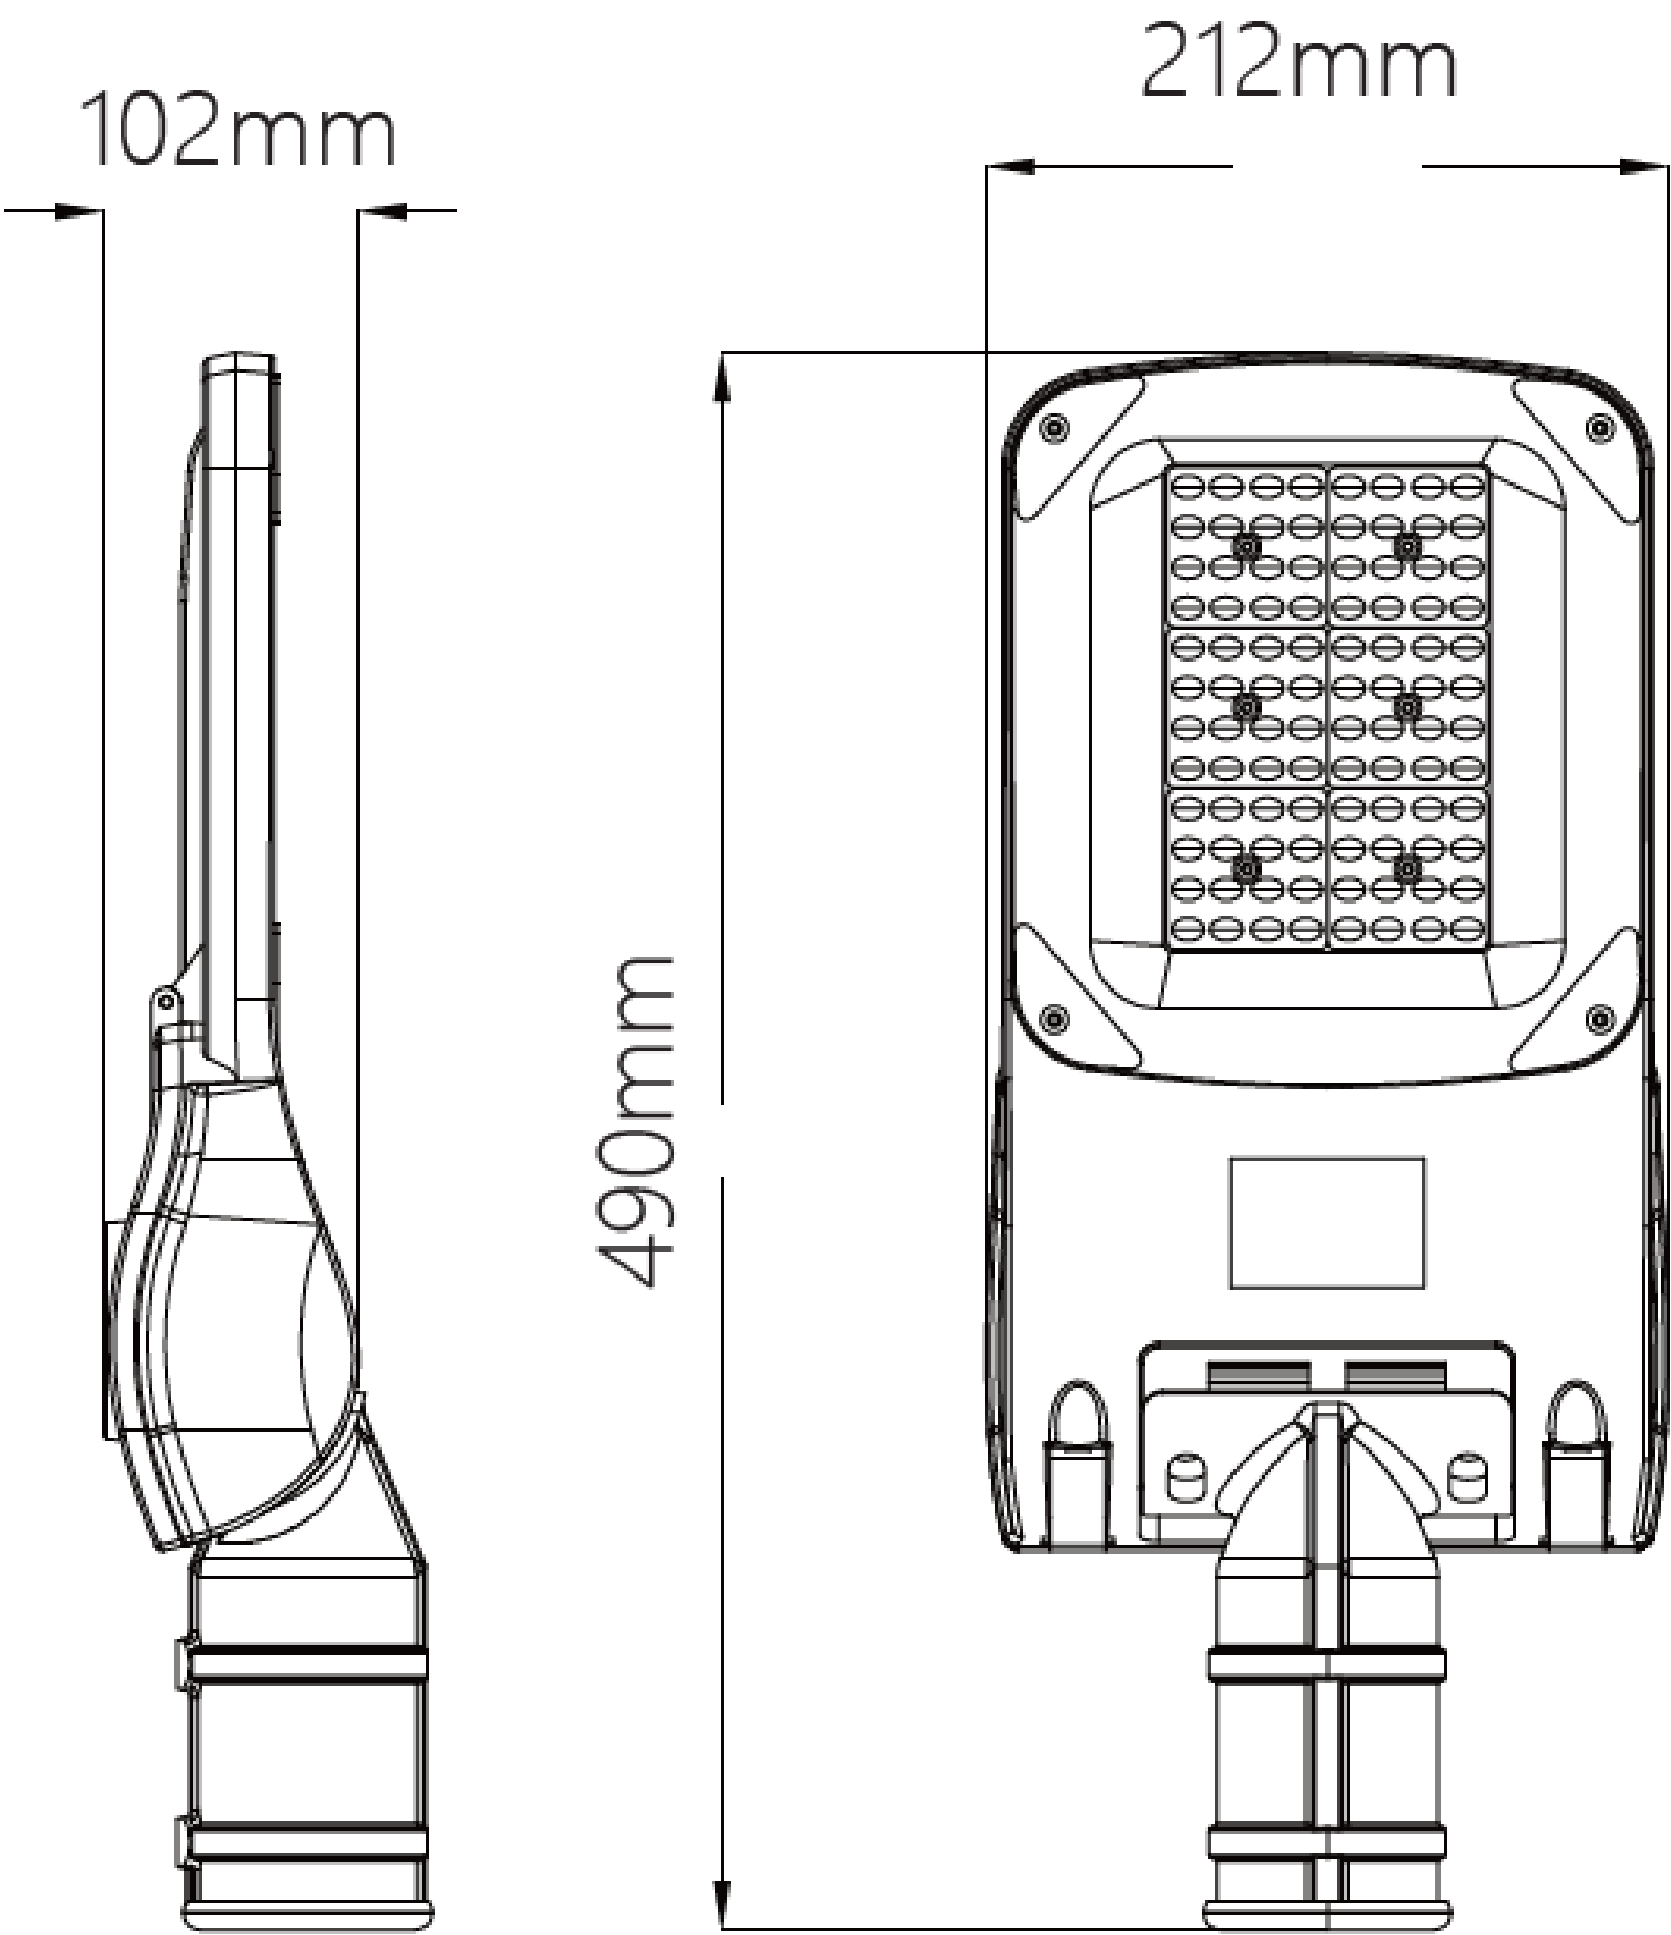

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

