

Bulk Head

SLT-B01-LED Cow Eye



PERFORMANCE DATA

Efficacy : 120 Lm/W

Input Voltage : 220 - 240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 30,000-50,000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum & Plastic

Mounting : Surface / Wall Mounted


Lens : Opal

Finish : Black

Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

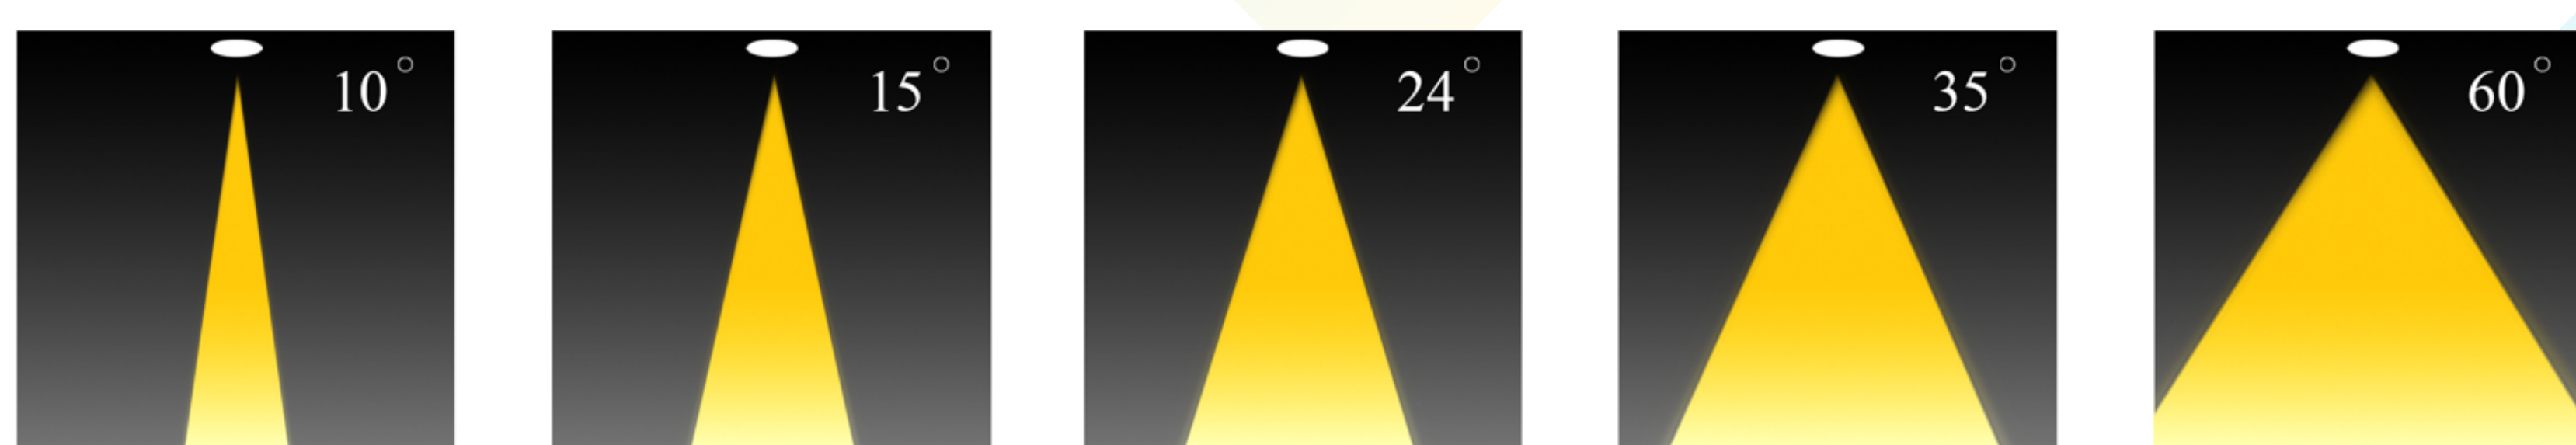

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions LxWxH mm	Driver	LED Chip	Weight Kg
BO13308XXXLXXXX	10	100	3000	280x182x90 mm	Elsewedy Done CE	Lumiled	0.950
	12	120	4000				
	20	80	6500				



CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

