

Bulk Head

SLT-B03



PERFORMANCE DATA

Efficacy : 80 Lm/W

Input Voltage : 220-240VAC

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum & Plastic

Mounting : Surface / Wall Mounted


Lens : Plastic

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

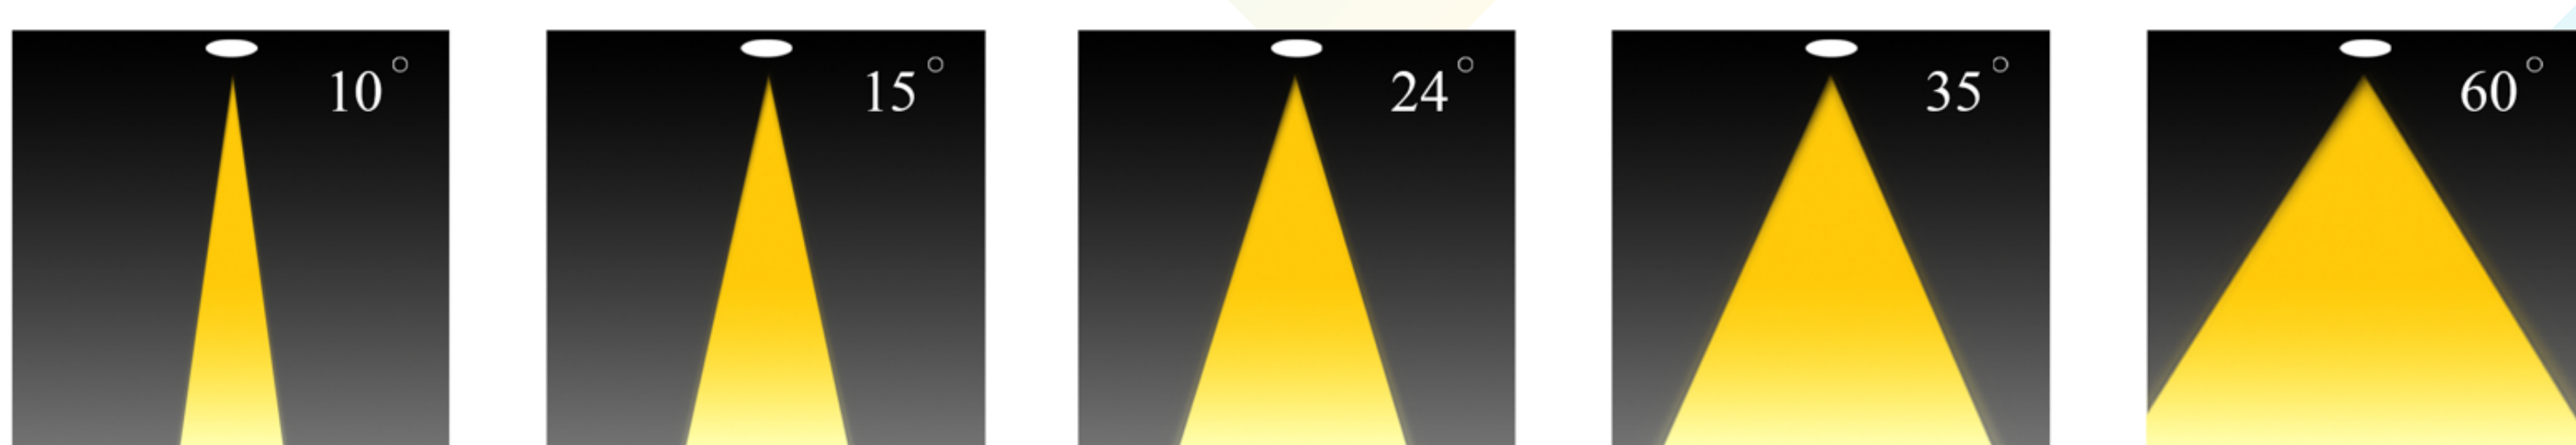

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions LxWxH mm	Driver	LED Chip	Weight Kg
B032308XXXLX0XX	13 20	80	3000	280x182x85 mm	CE El-Sewedy	Lumiled	

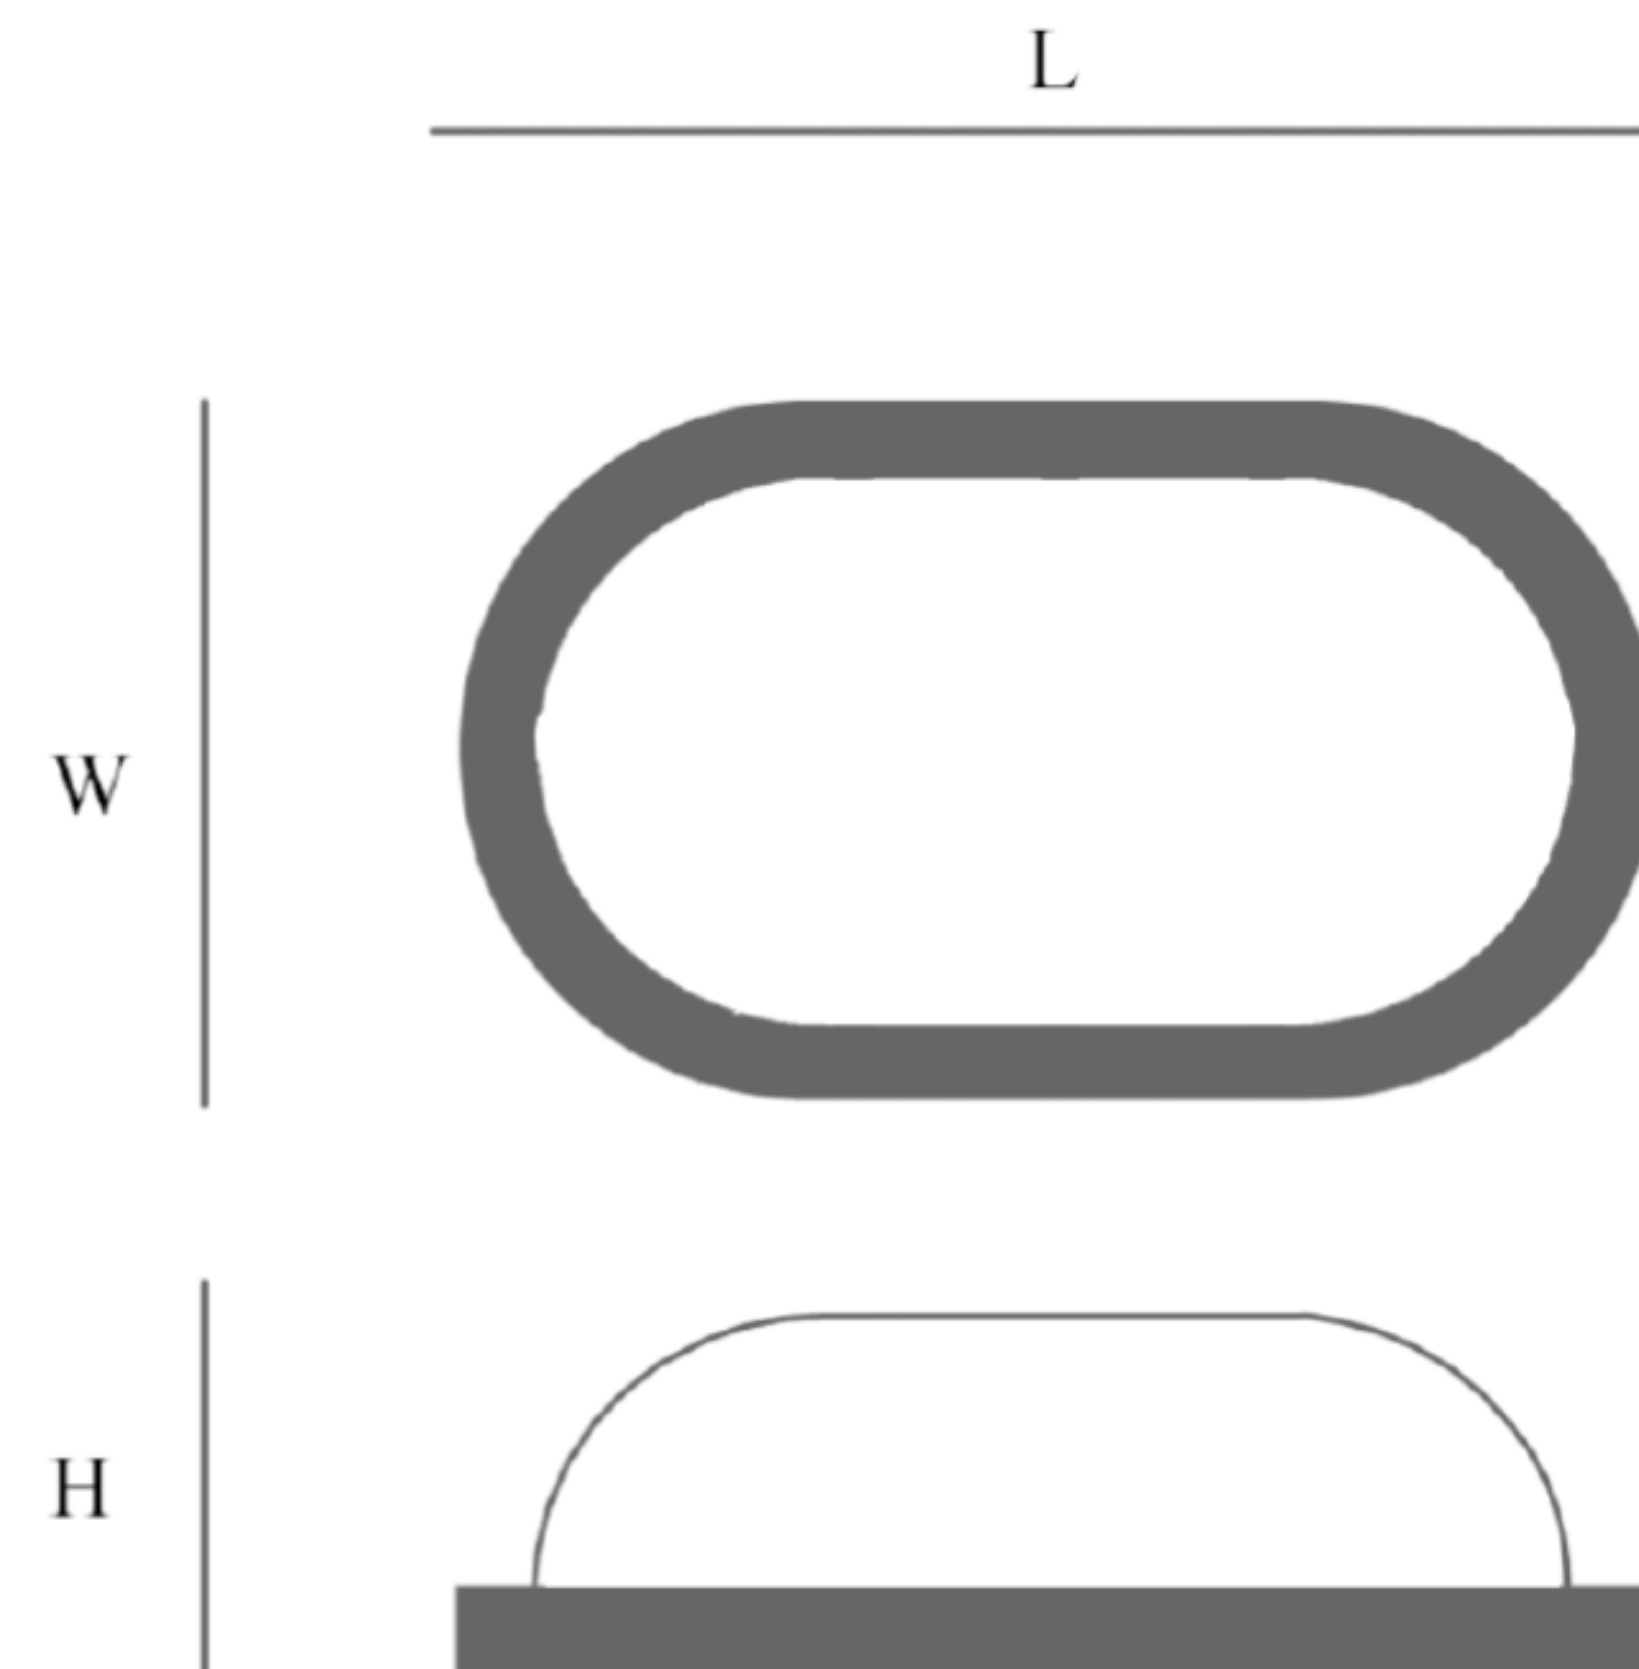

CUSTOMISZE OPTIONS

3K	4K	6.5K	CRI >80	DALI
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80	

POLAR CURVE

