

Bollard

SLT-BL11



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum

Mounting : In-Ground



Lens : Opal

Finish : Silver & Black


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

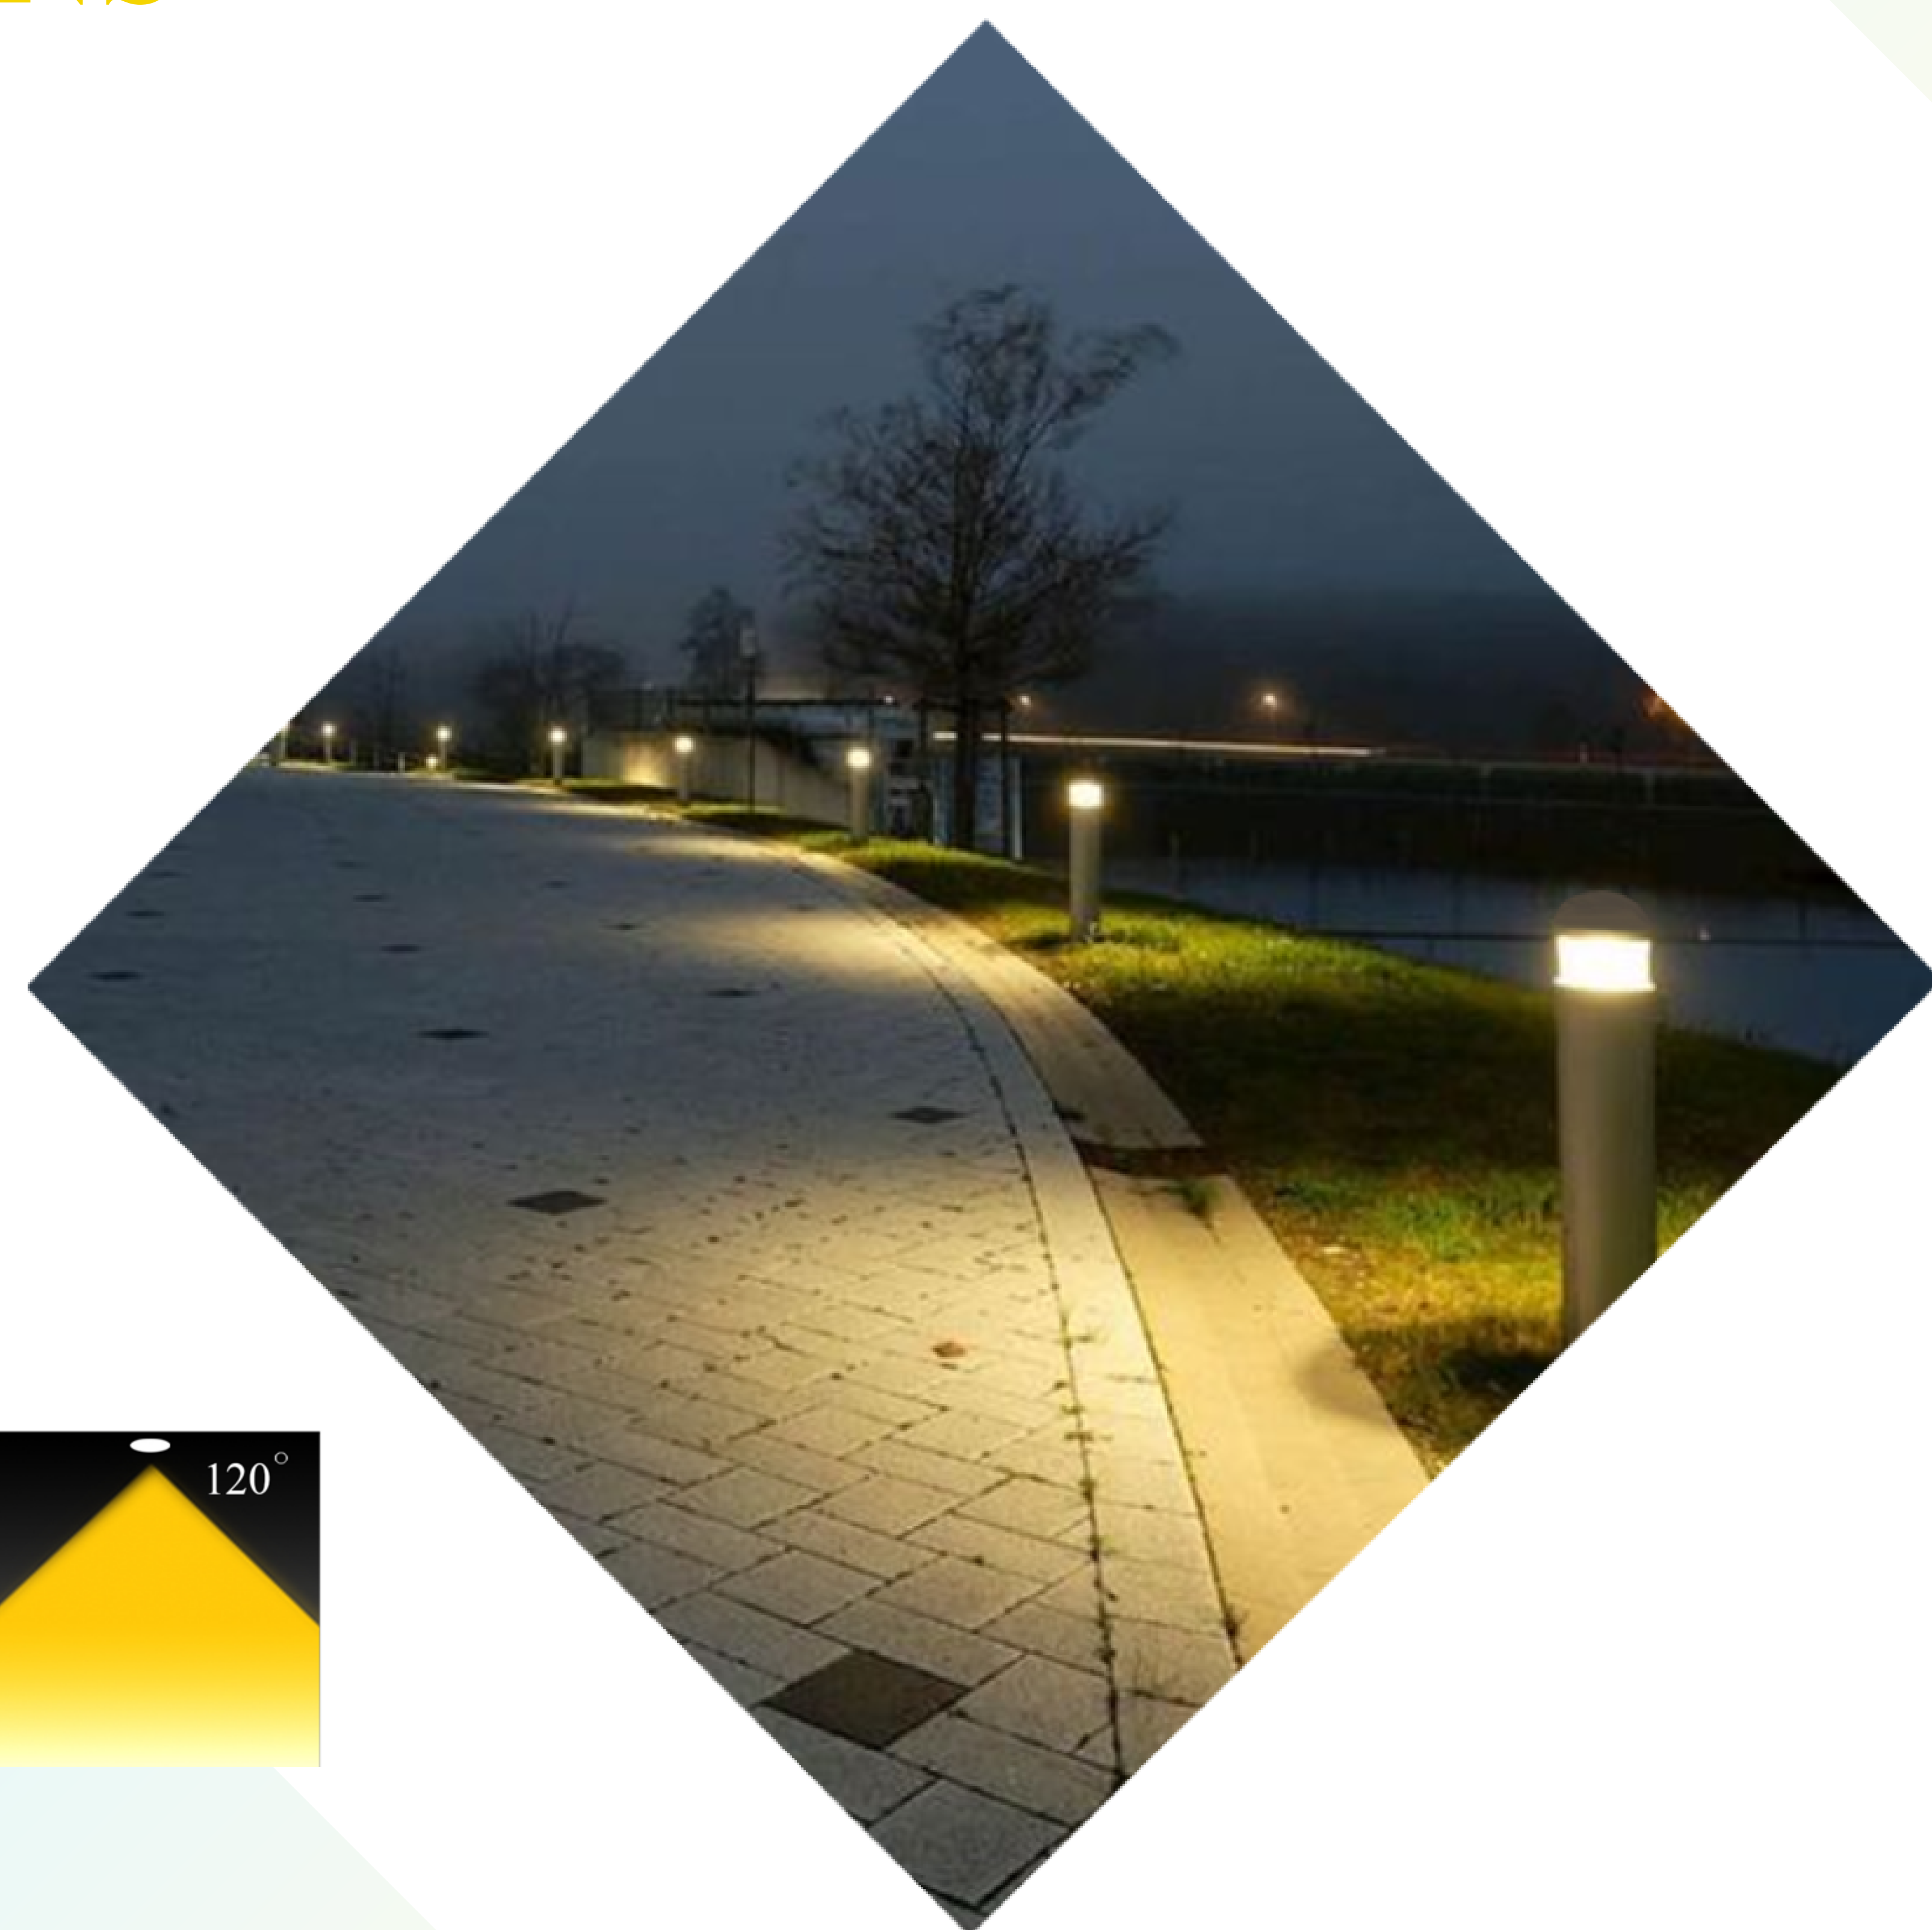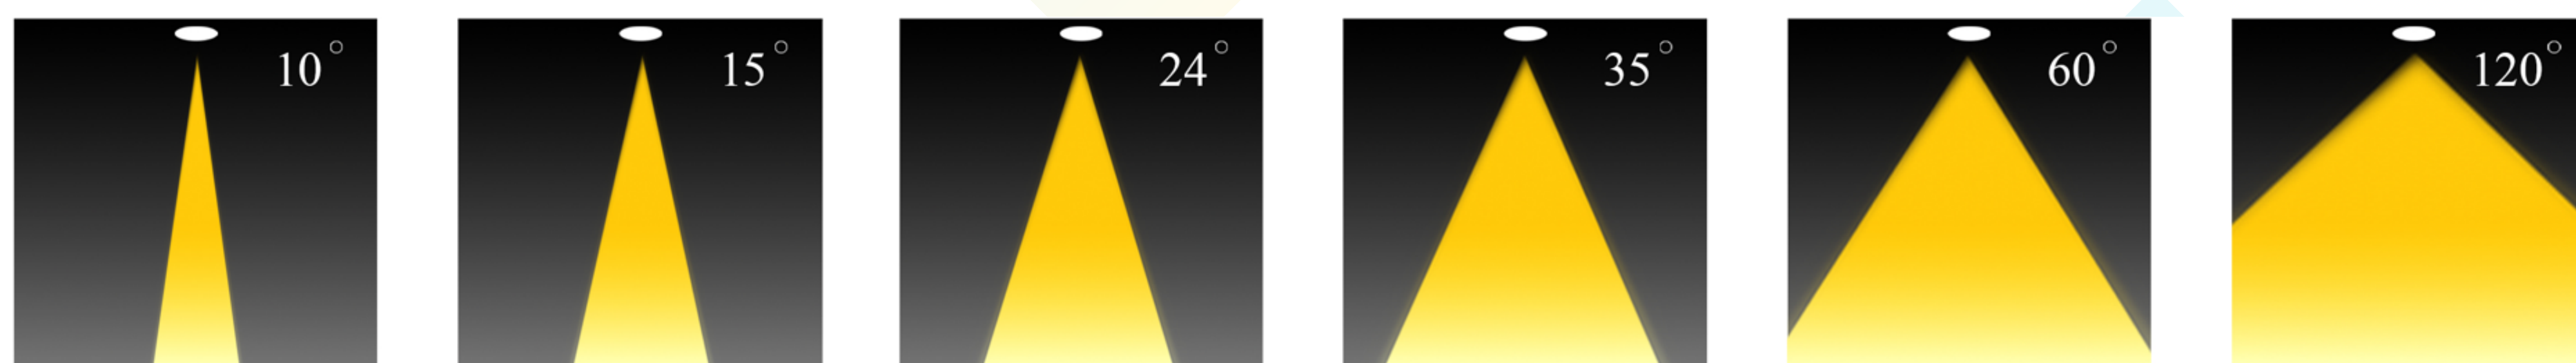

Code	Power W	Efficacy	Colour Temp. K	Dimensions H - mm	Driver	LED Chip
BL11XE271000	9 12 15	90	3000 4000 6000	1000 mm	N/A	E27

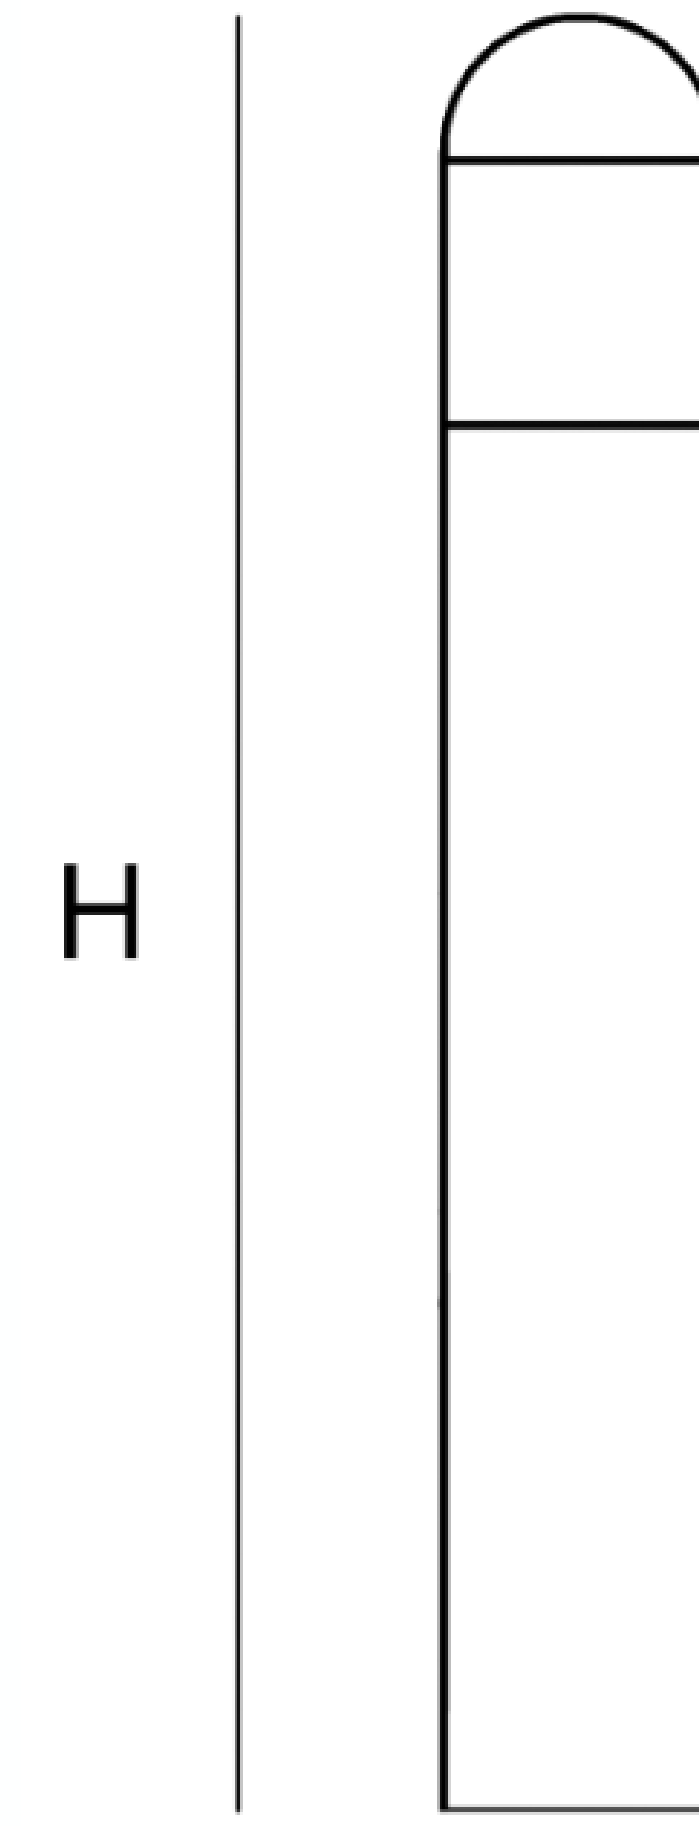

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

POLAR CURVE

