

Bollard

SLT-BL14



PERFORMANCE DATA

Efficacy : 110 Lm/W

Input Voltage : 220 V

Frequency : 50 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum

Mounting : In-Ground






Lens : Opal

Finish : Gray


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

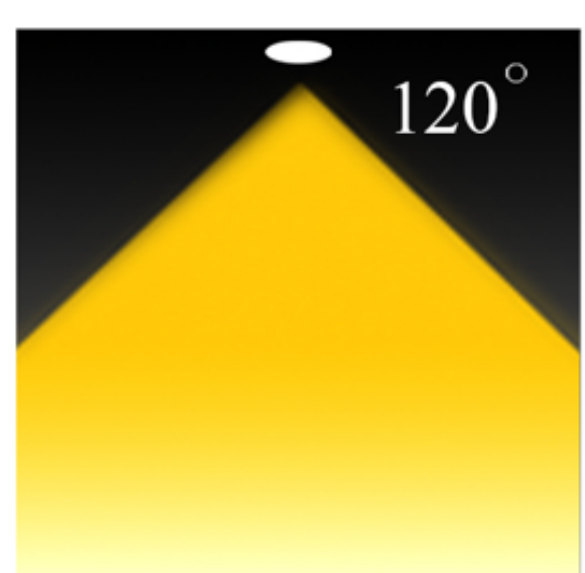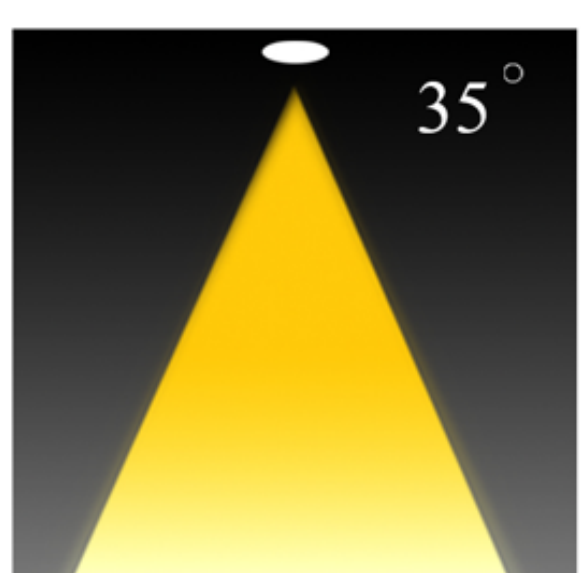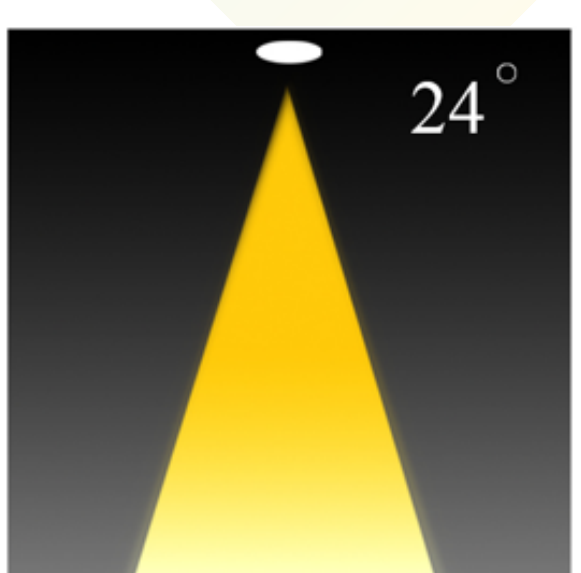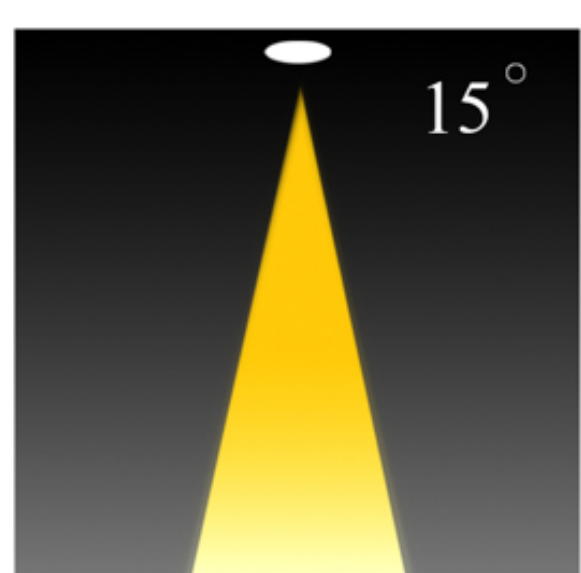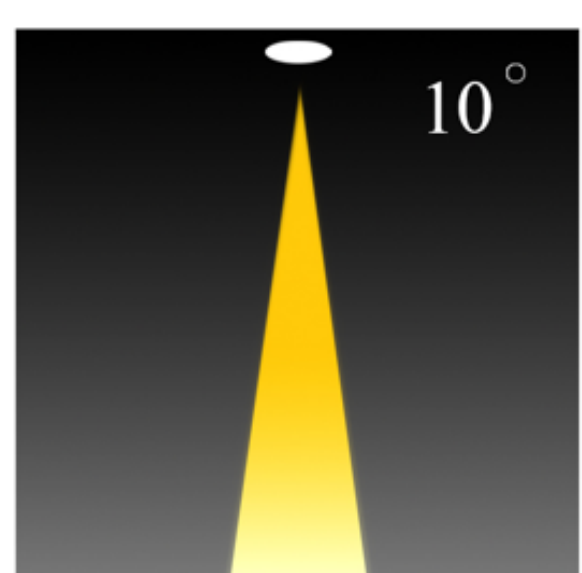

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions H - mm	Driver	LED Chip
BL142308120LXXXX	12 15 20	110	3000 4000	650 * 90 1000 * 90	Meanwell Philips	Lumiled

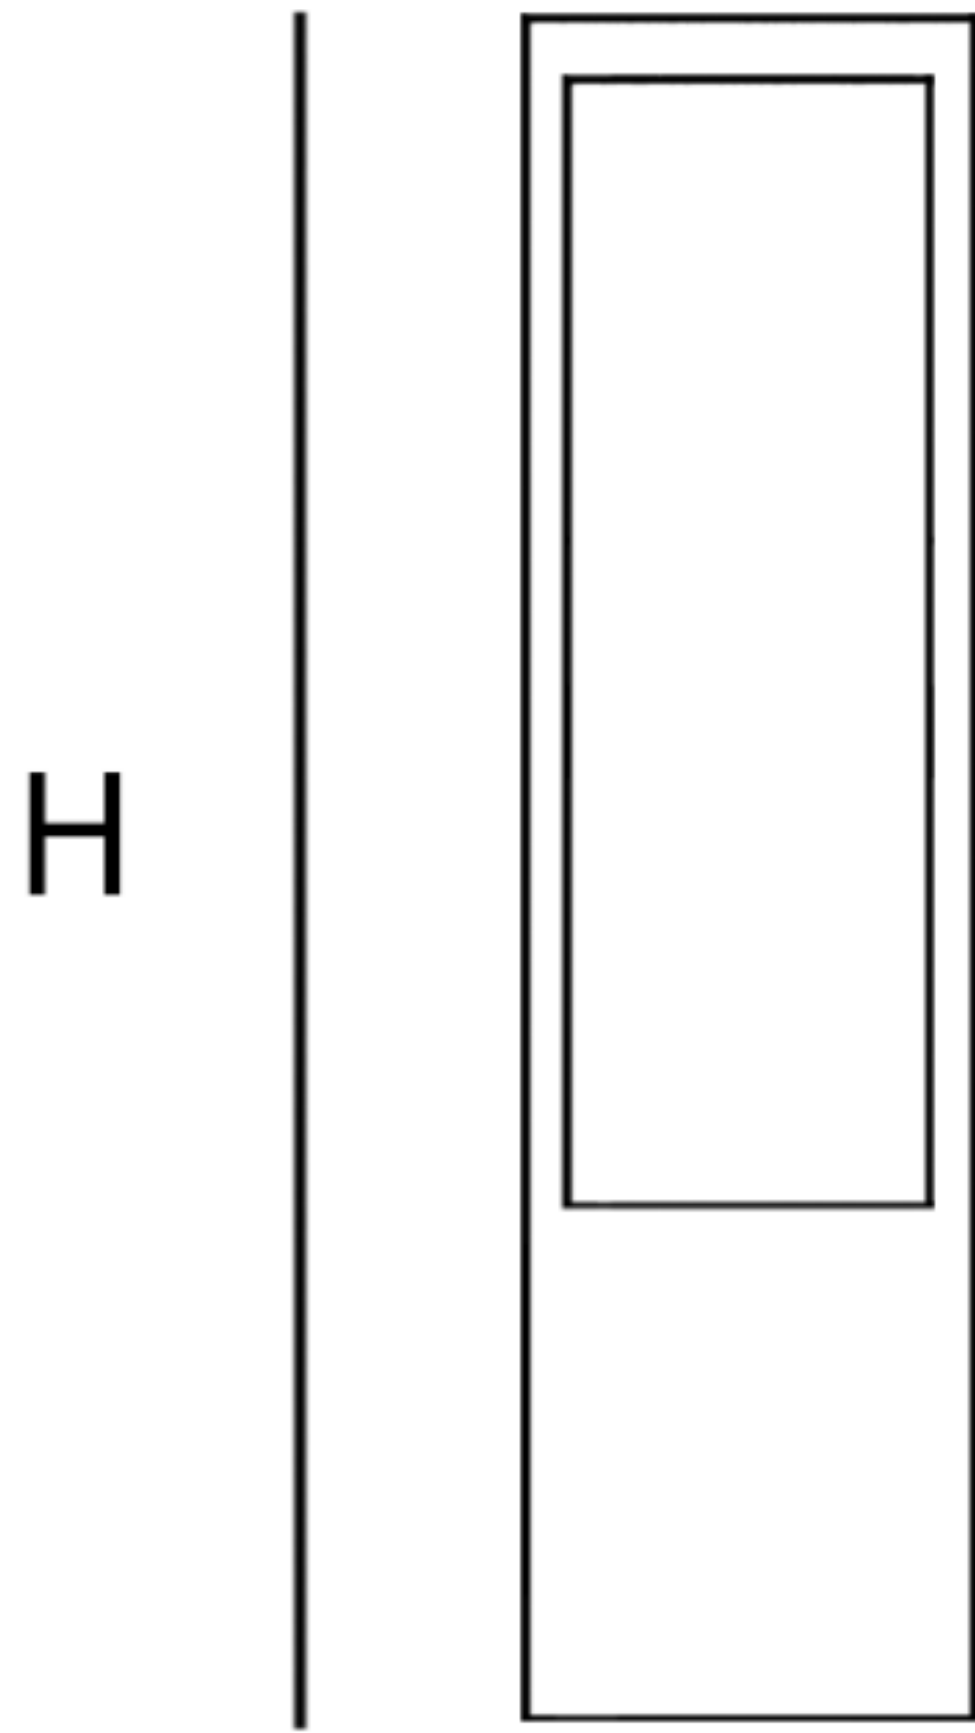

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI
>80

Color Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

