

# Bollard

SLT-BL16



## PERFORMANCE DATA

**Efficacy :** 108 Lm/W

**Input Voltage :** 220 V

**Frequency :** 50 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000 K

**Life Time :** 50.000 hrs

**Optic :** 25-35°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminum

**Mounting :** In-Ground

**Lens :** Polycarbonate







**Finish :** Gray

**Protection Class :** IP 66

**Mechanical Resistance :** IK 08




## OPTICS

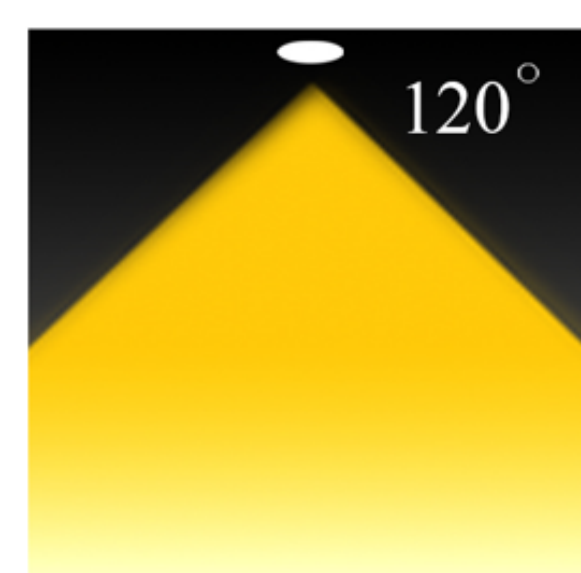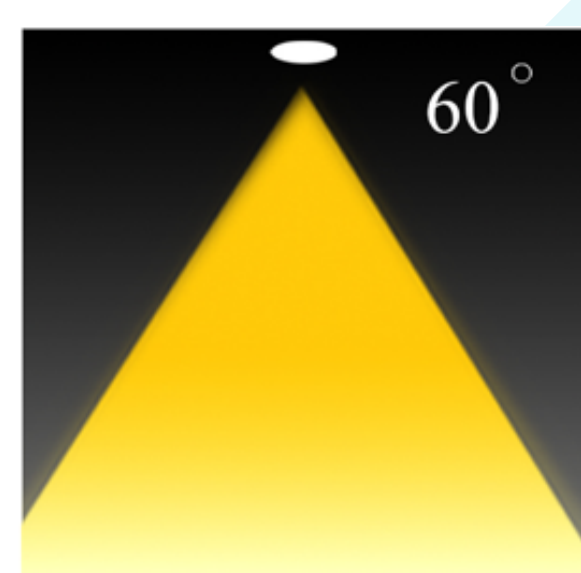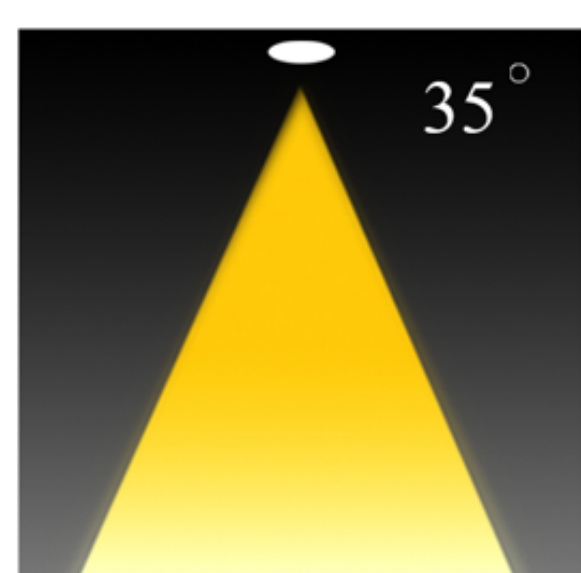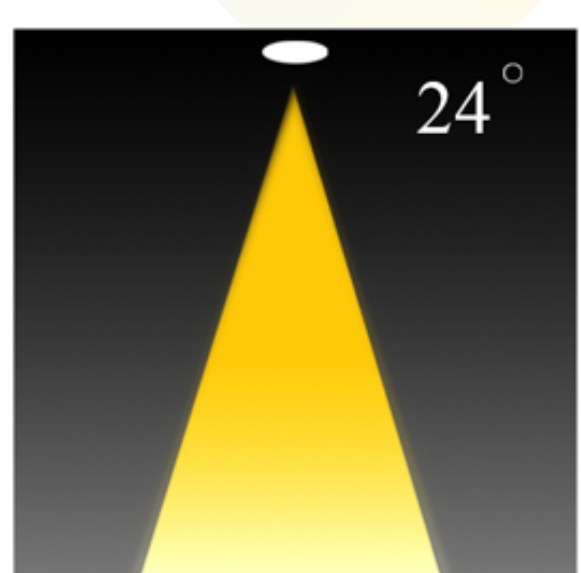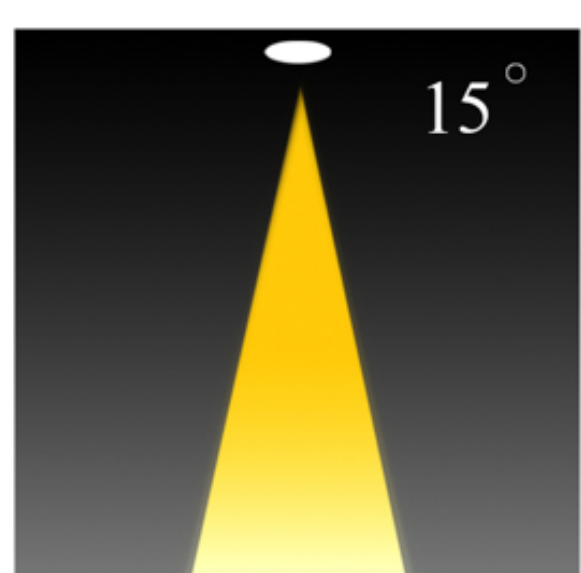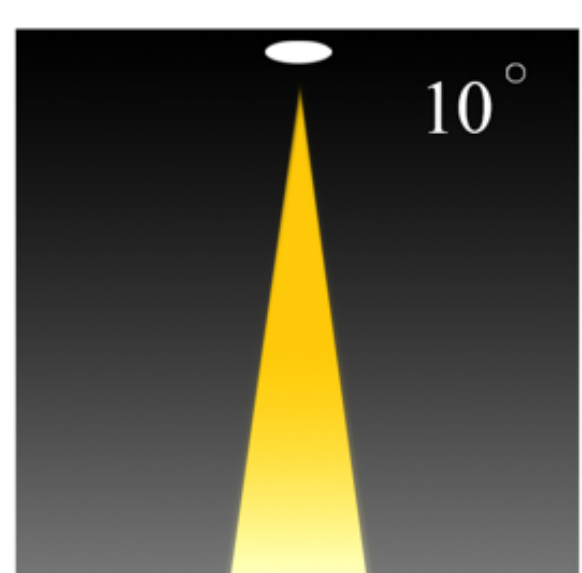



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions L×W×H - mm	Driver	LED Chip
BL163308XXXCXXXX	12 20	108	3000 6500	120×100×800 mm	Meanwell CE	Cree

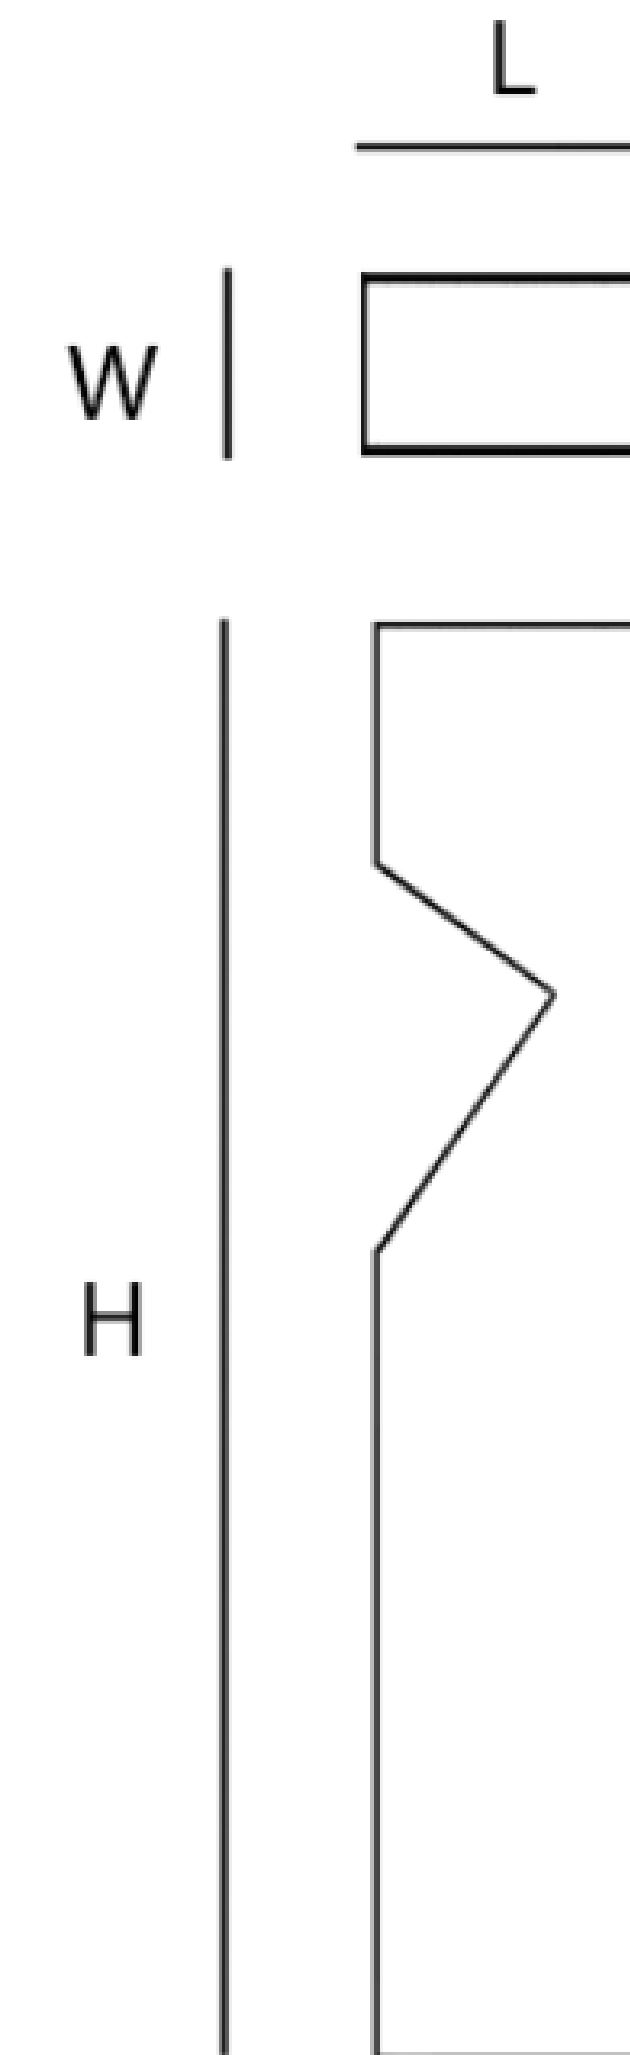

## CUSTOMISZE OPTIONS

3K

Light  
Temperature  
3000K

4K

Light  
Temperature  
4000K

6.5K

Light  
Temperature  
6500K

CRI  
>80

Color  
Rendering  
Index >80

FINISH

Black

DALI

## POLAR CURVE

