

Pole Light

SLT-DP01



PERFORMANCE DATA

Efficacy : 110-120 Lm/W

Input Voltage : 220 V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 30.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum

Mounting : Pole Mounted


Lens : Glass

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 06

OPTICS

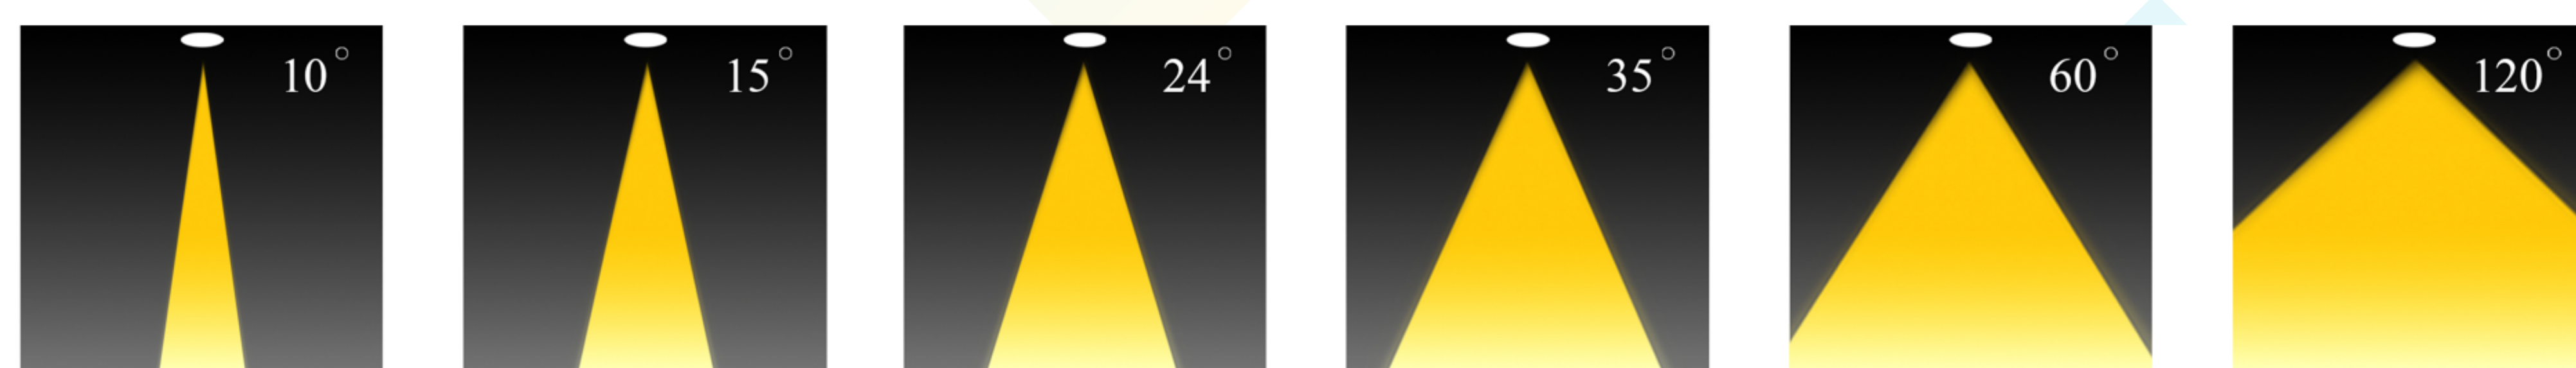

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions H mm	Driver	LED Chip
DP13308120PE040	40	110-120	3000	3000	Eagle rise	Philips

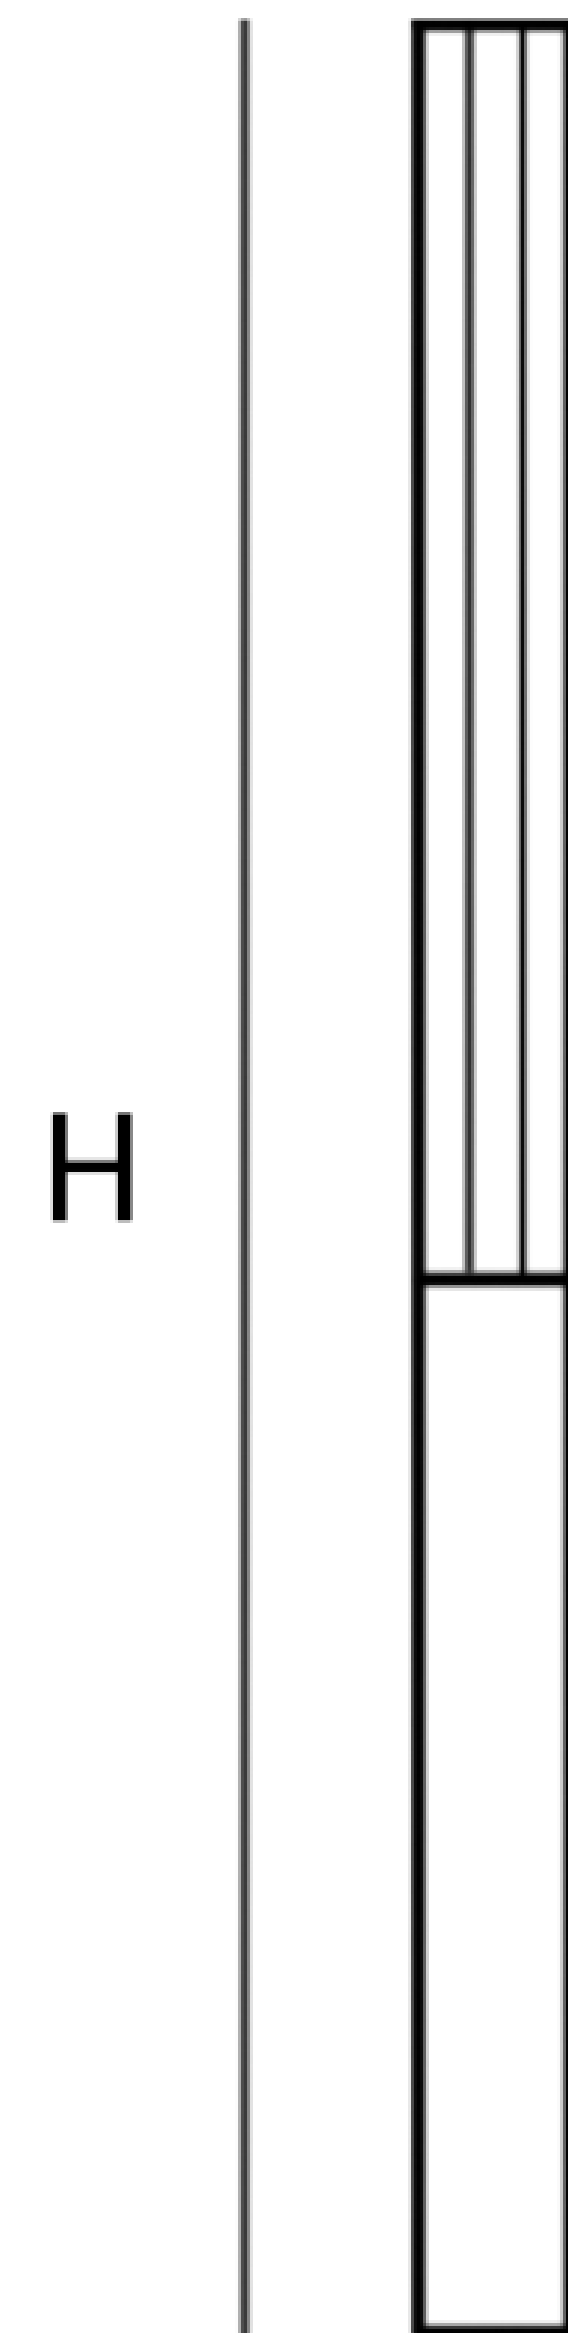

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

