

Pole Light

SLT-DP02



PERFORMANCE DATA

Efficacy : 80 Lm/W

Input Voltage : 220-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 2700K-3000K

Life Time : 50.000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum

Mounting : Pole Mounted


Lens : Pc

Finish : Black


Protection Class : IP 65

Mechanical Resistance : IK 08

OPTICS

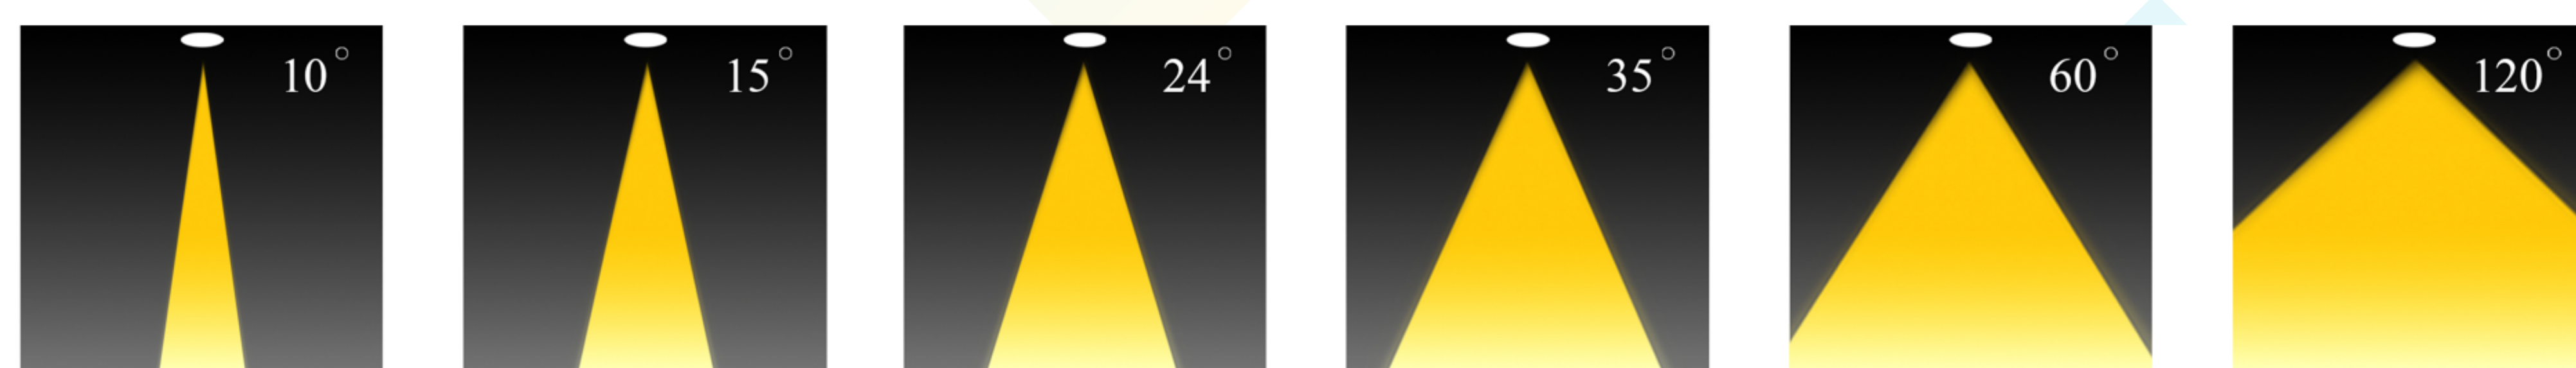

| Code | Power W | Efficacy Lm/W | Colour Temp. K | Dimensions H mm | Driver | LED Chip |
|----------------------|----------------|------------------|-------------------|------------------------------|---------------------|---------------|
| DPXXXXXXXXXXXXXXXXXX | 15 30 70 | 80 | 3000 2700 | 2500 3000 3500 3700 | Philips Meanwell | VS Lumiled |

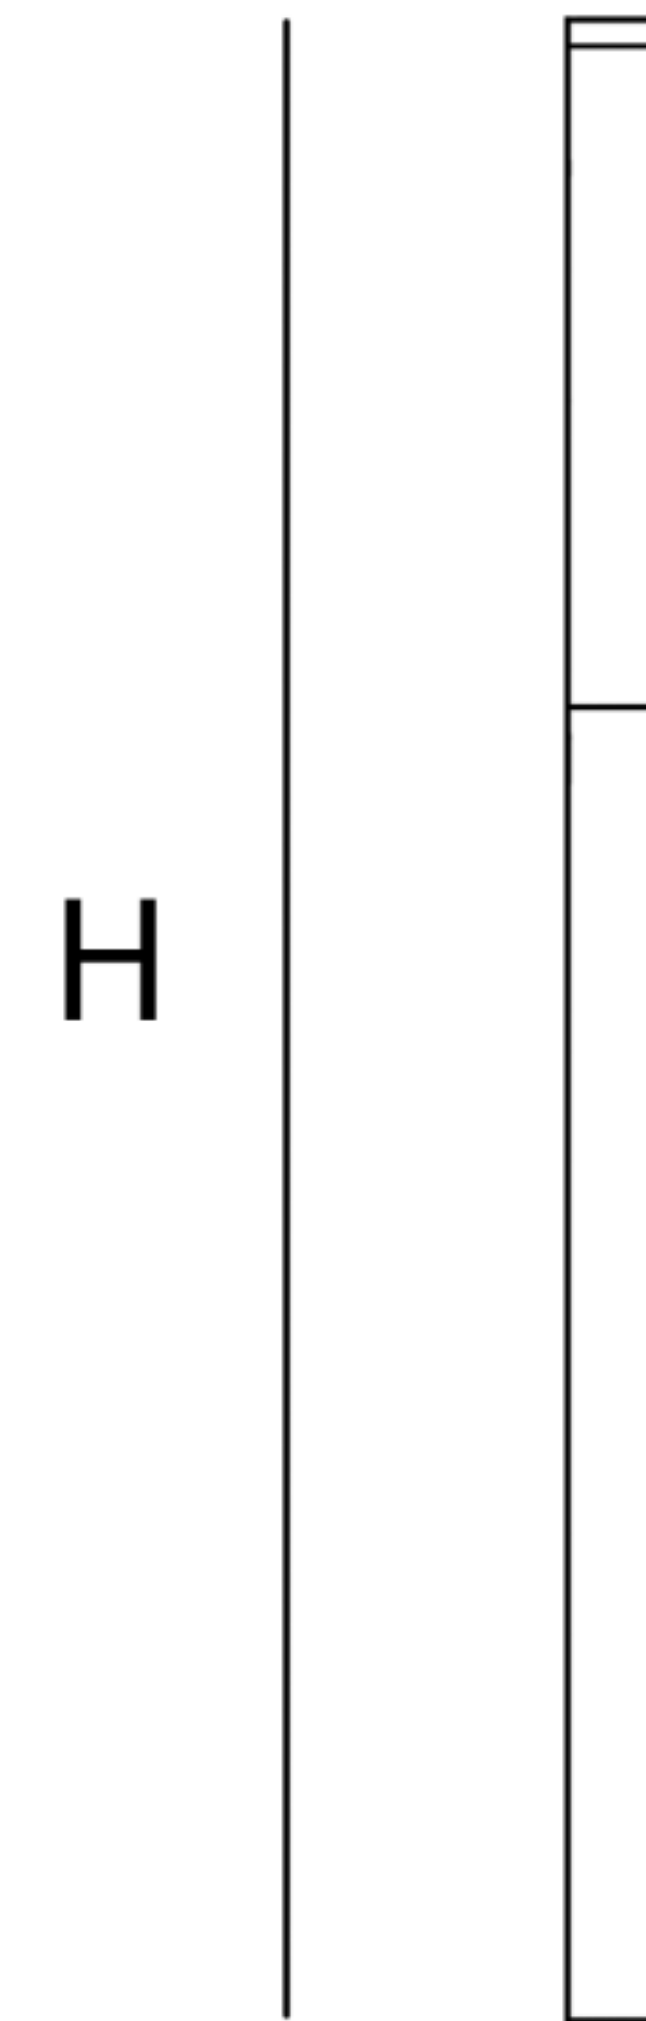

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

