

Pole Light

SLT-DP12



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240 V

Frequency : 50 Hz

Color Rendering : CRI

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Hot-galvanized steel tapered pole

Mounting : Pole Mounted

Lens : PC


Finish : Black

Protection Class : IP 44


Mechanical Resistance : IK 04 (Top post)



OPTICS

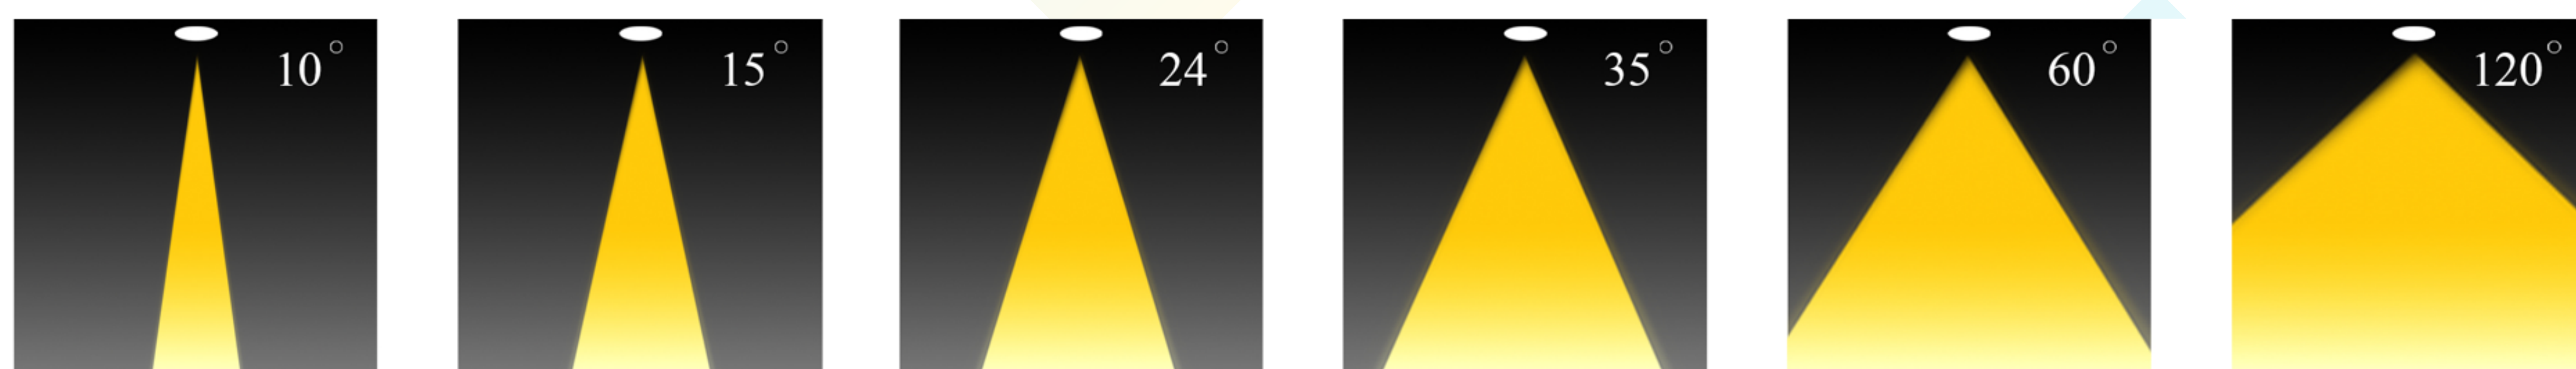

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions A×B×C mm	Driver	LED Chip
DP122-2*E27	2*9 2*12 2*15	90	3000 4000 6000	4000×2900×1007	N/A	E27

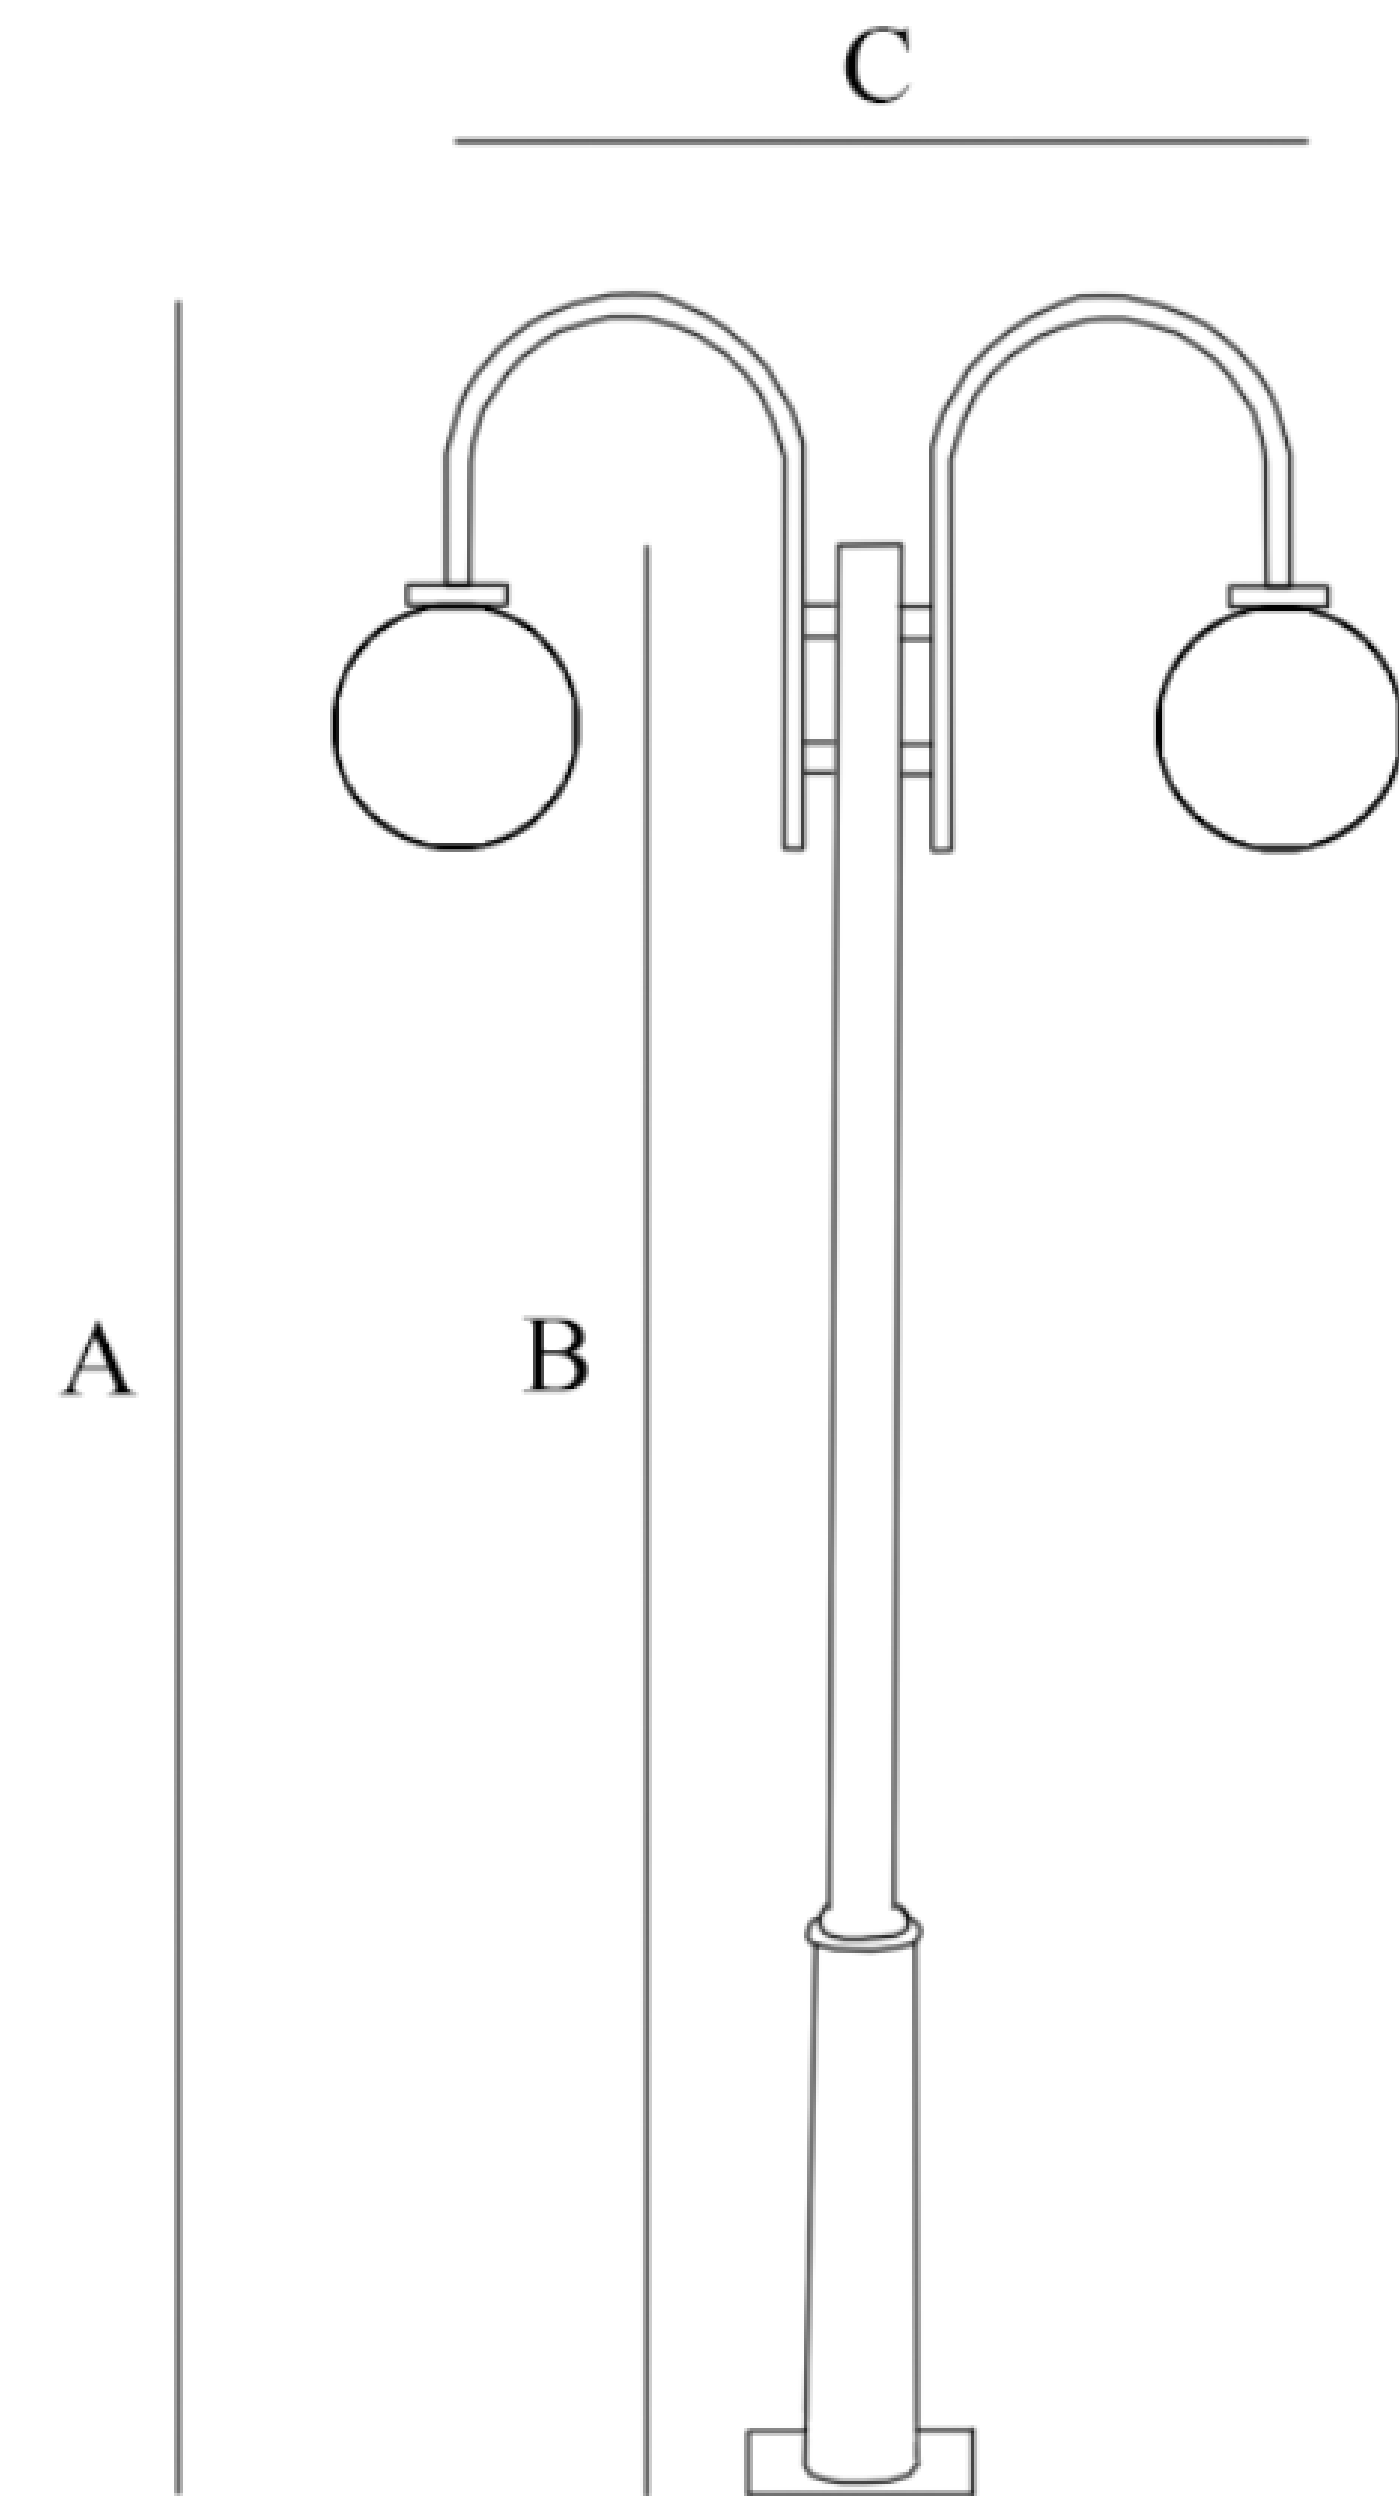

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

