

Pole Light

SLT-DP15



PERFORMANCE DATA

Efficacy : 63.1 Lm/W

Input Voltage : 110-240V

Frequency : 50 Hz

Color Rendering : CRI 80

Color Temperature : 4000 K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-cast Aluminum and Extruded Aluminum


Mounting : Pole Mounted

Lens : Opal PC


Finish : Black

Protection Class : IP 65

Mechanical Resistance : IK 08

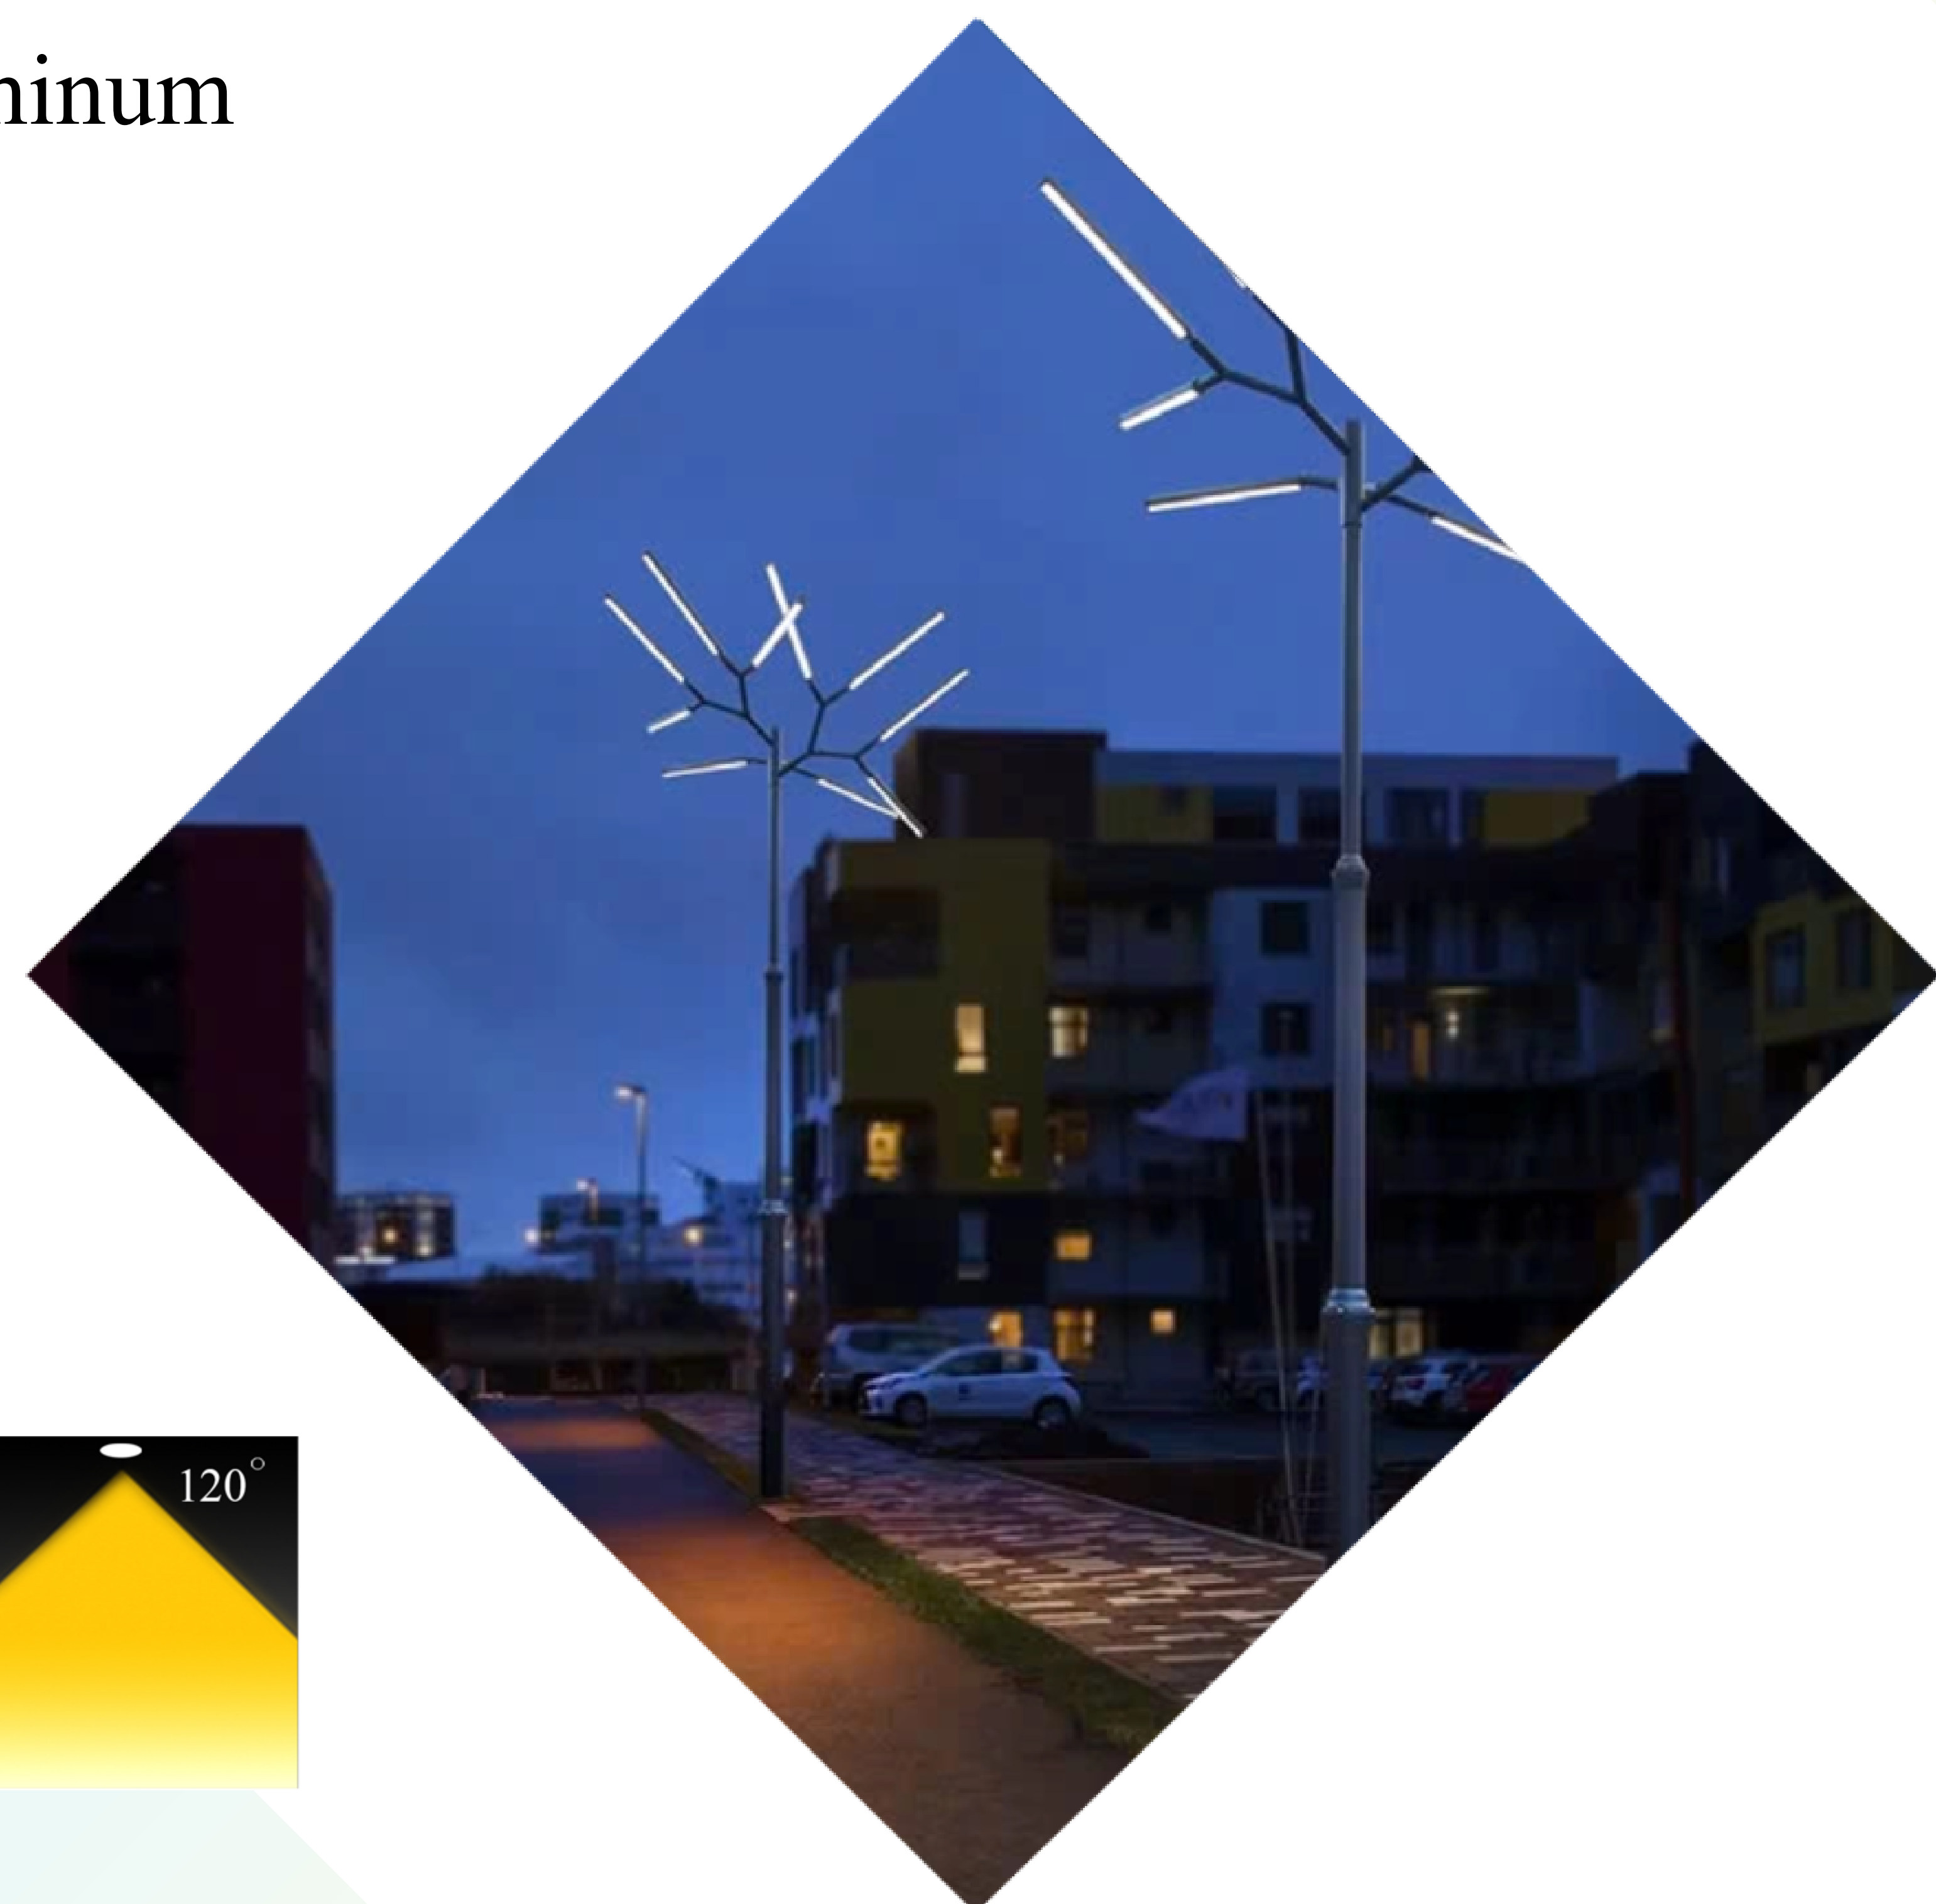

OPTICS

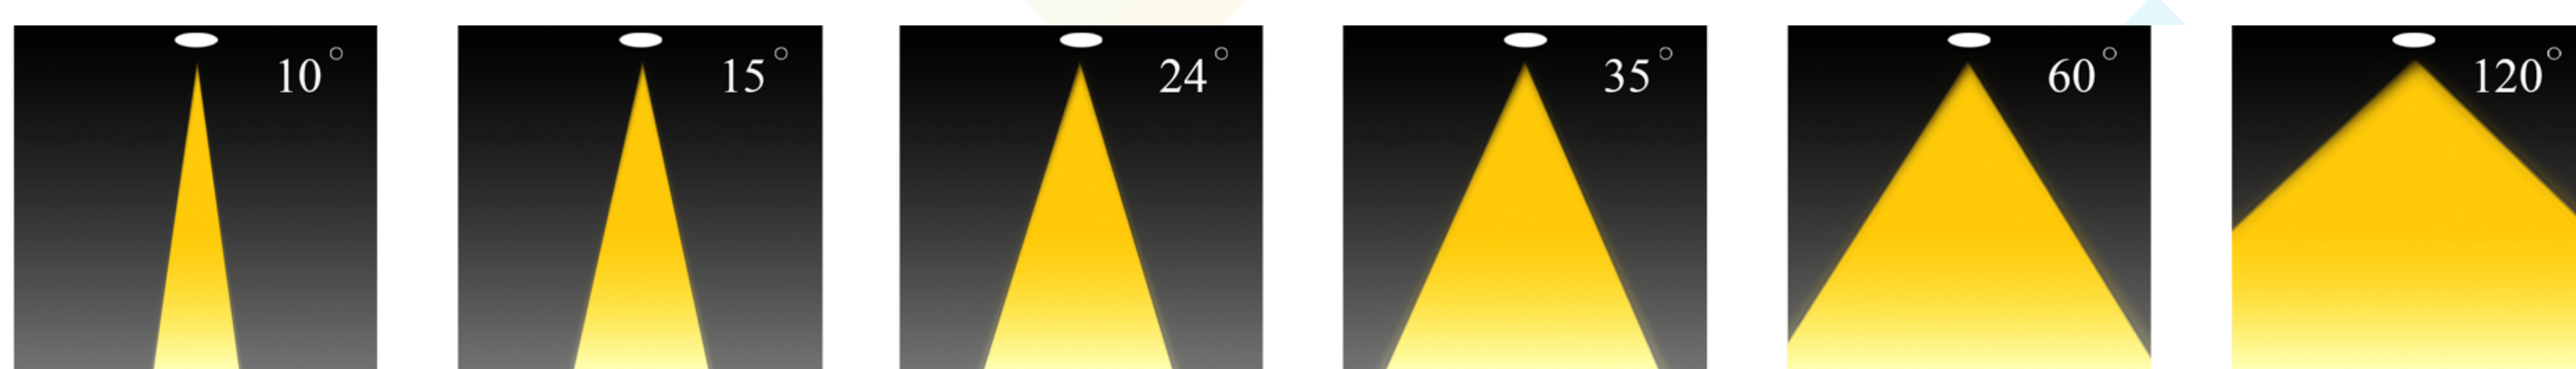

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅×H mm	Driver	LED Chip
DP152308120MI2204000	220 (11*20)	63.1	3000	60×4000 mm	Inventronic	MTC



CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

Black

DALI

POLAR CURVE

