

Magnetic track

SLT-MT01



PERFORMANCE DATA

Efficacy : 110 Lm/W

Input Voltage : 220VAC

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 30,000 hrs

Optic : 30 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Die Casting Aluminum

Mounting : Magnetic track light





Lens : Opal

Finish : Black


Protection Class : IP44

Mechanical resistance : IK 07

OPTICS

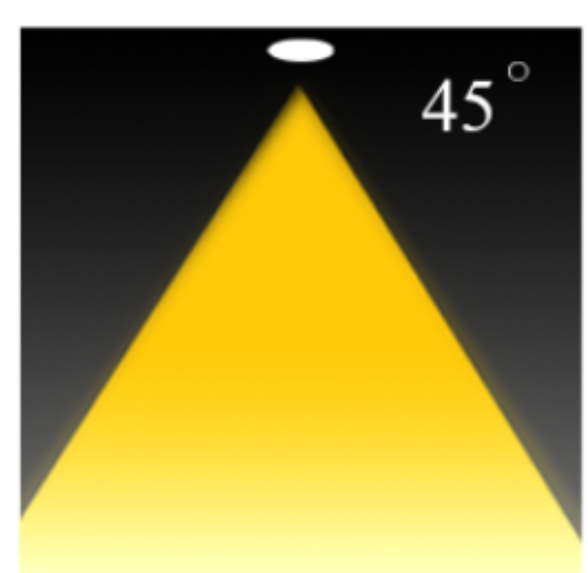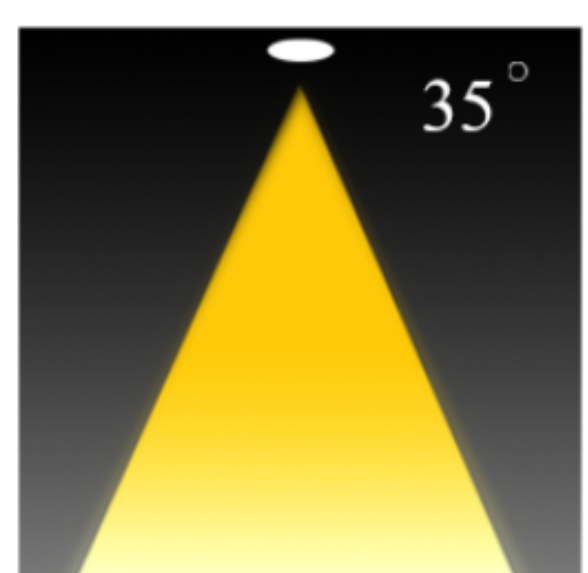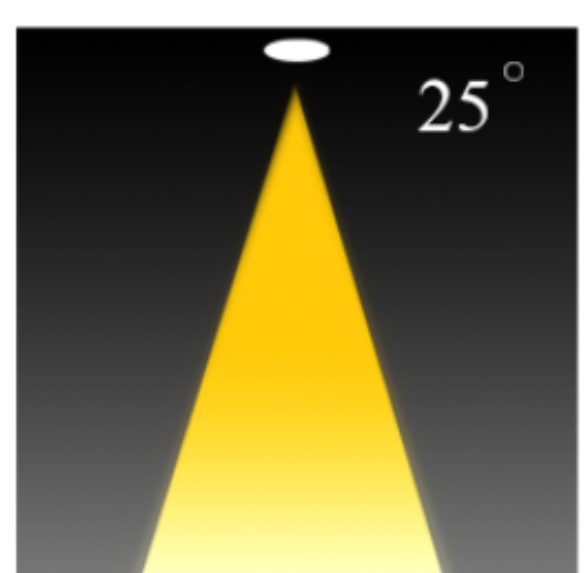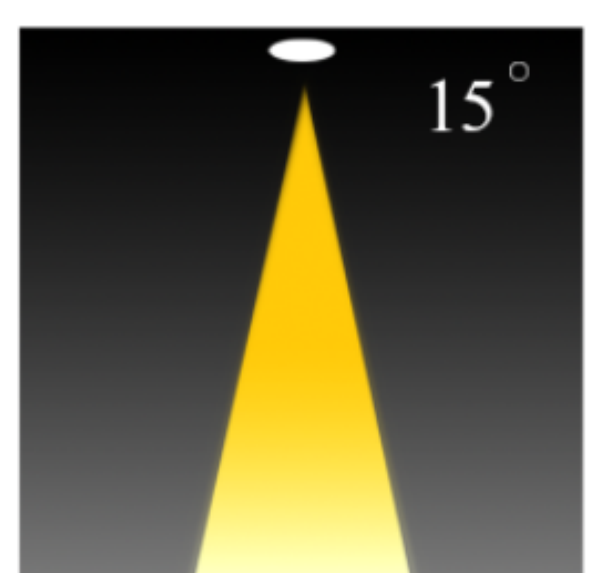

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions L×W×H mm	Driver	LED Chip	Weight Kg
MT012XX8120XXXXX	18 50	85	3000 4000	343×22×100 mm -	Tridonic Ltech	Osram Bridgelux	0.600

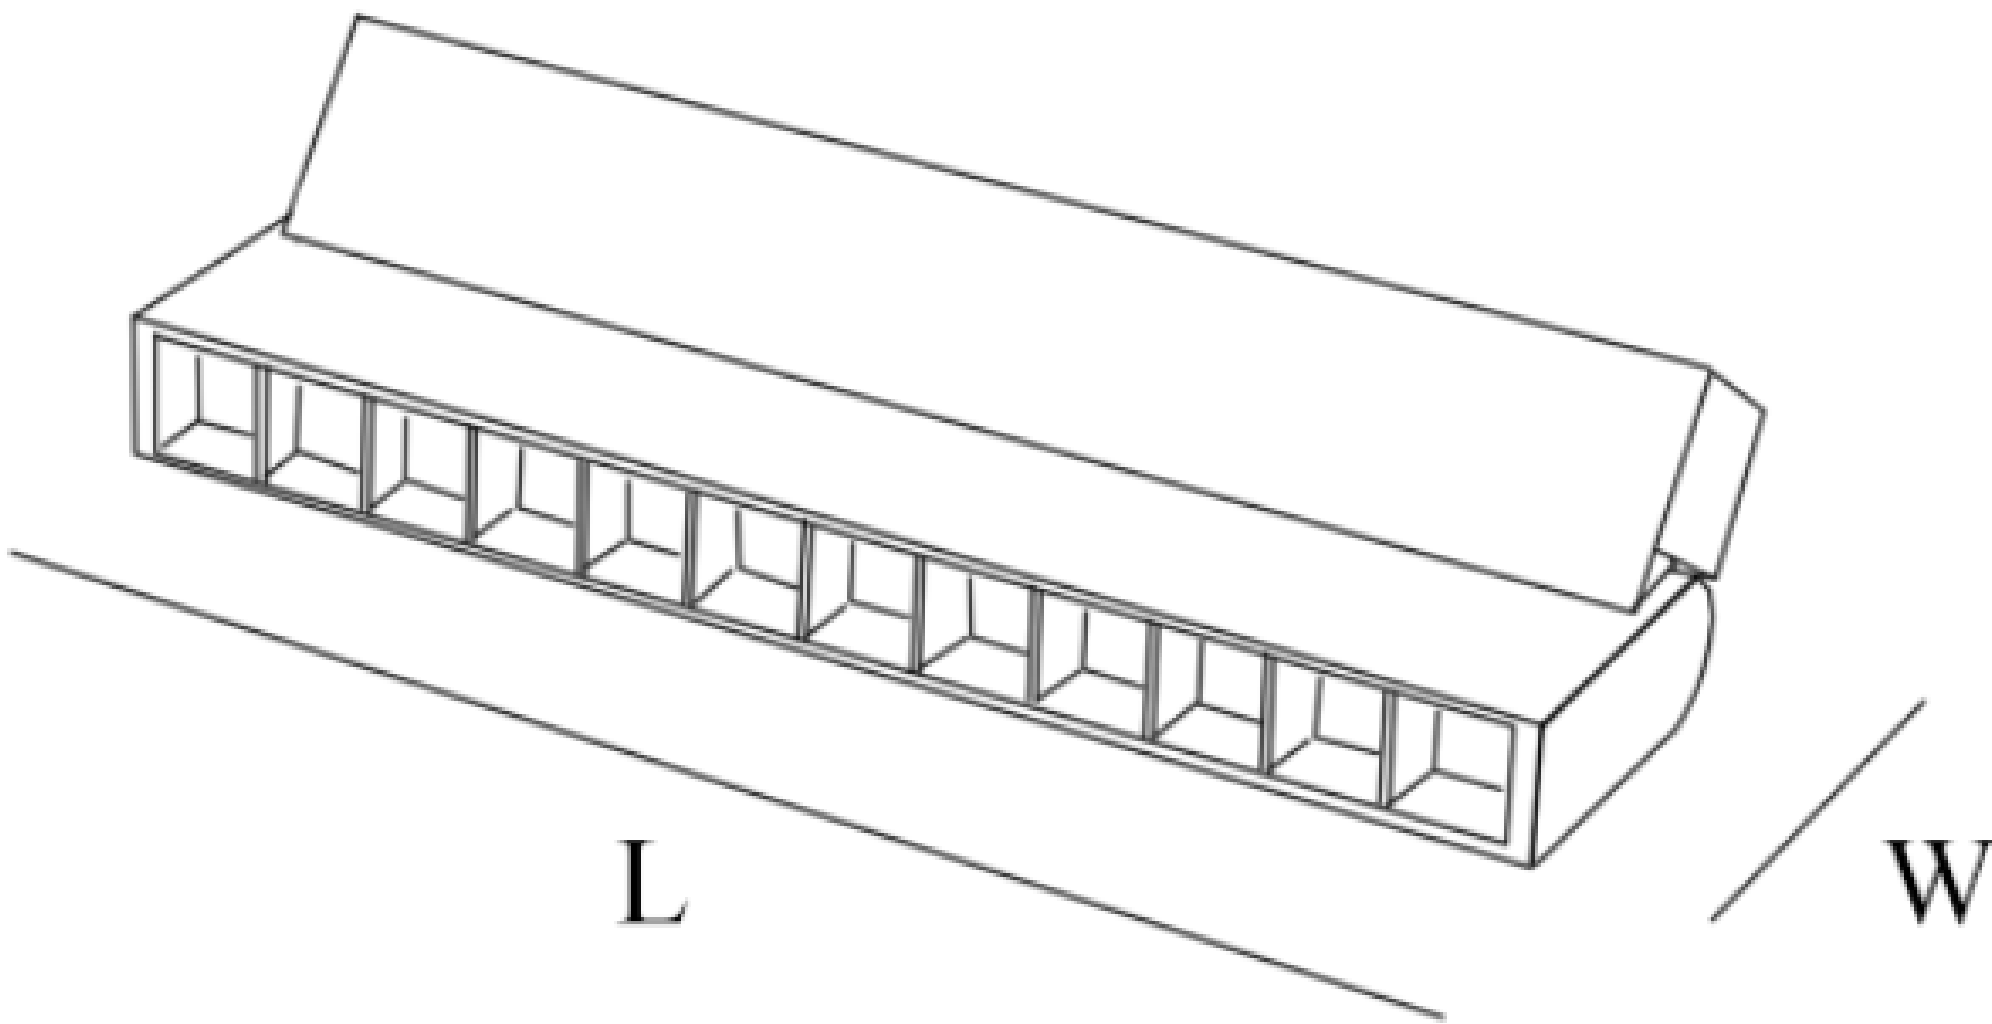

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

