

Magnetic track

SLT-MT03



PERFORMANCE DATA

Efficacy : 85 Lm/W

Input Voltage : 198-264V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 30,000 hrs

Optic : 24°

Class : III

MECHANICAL SPECIFICATIONS

Material : Die Casting Aluminum

Mounting : Magnetic track light


Lens : Glass

Finish : Black


Protection Class : IP 20

Mechanical resistance : IK 07

OPTICS

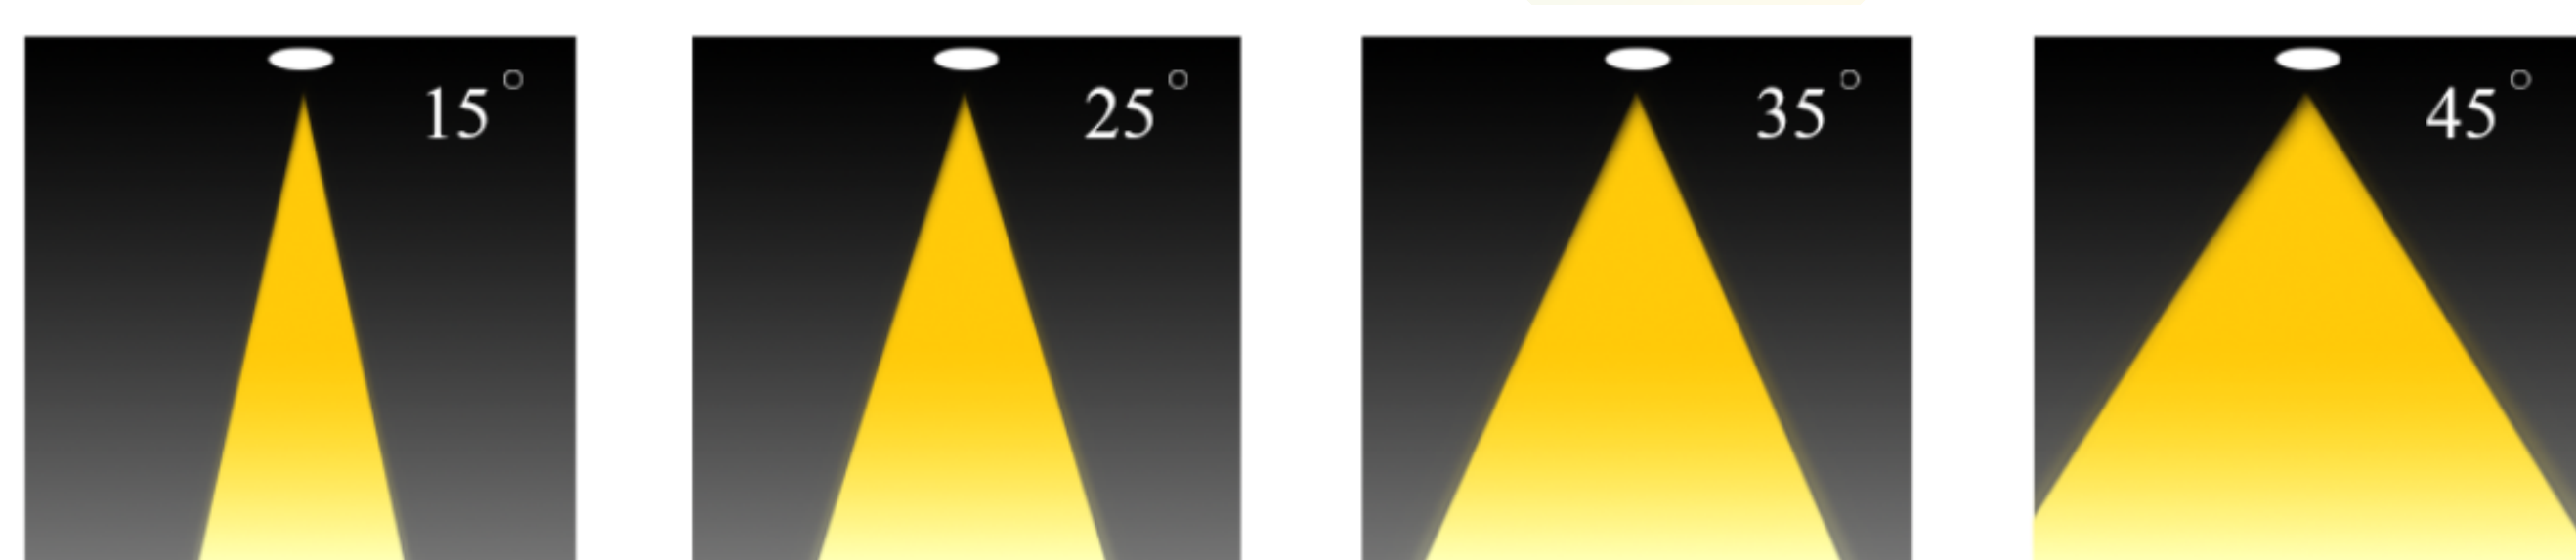

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø xL mm	Driver	LED Chip	Weight Kg
MT0XX30X0XXBL005	5	85	3000	50×110 mm	Tridonic Ltech	Osram Bridgelux	0.300

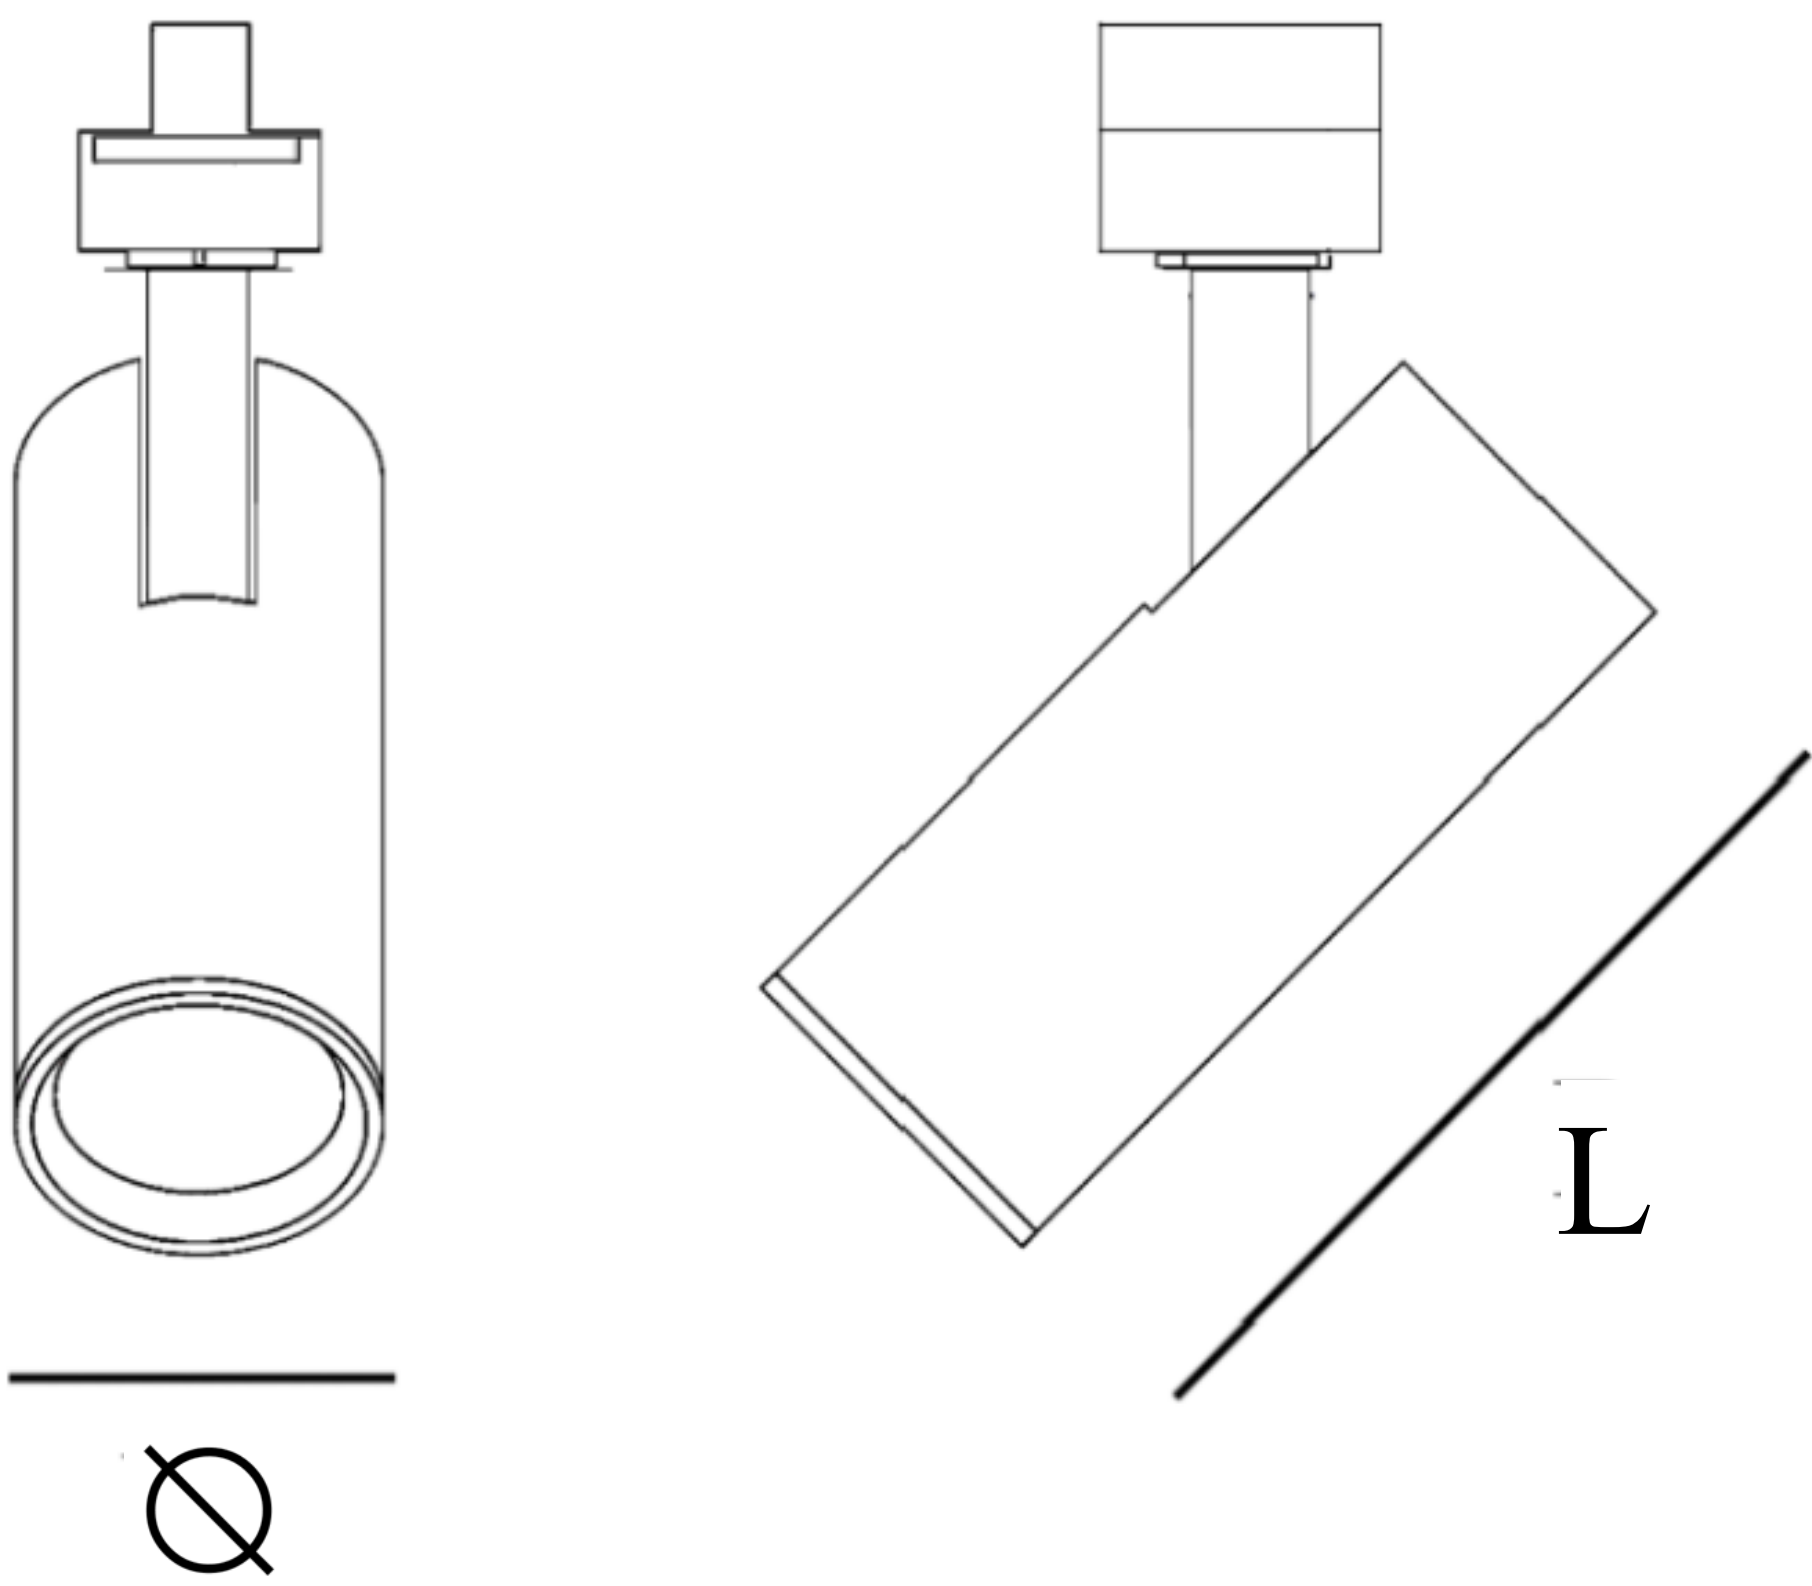

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

