

# Magnetic track

SLT-MT04



## PERFORMANCE DATA

**Efficacy :** 85 Lm/W

**Input Voltage :** 48V

**Frequency :** 50Hz

**Color Rendering :** CRI 90

**Color Temperature :** 4000K

**Life Time :** 30,000 hrs

**Optic :** 24 °

**Class :** III

## MECHANICAL SPECIFICATIONS

**Material :** Die Casting Aluminum

**Mounting :** Magnetic track light





**Lens :** Glass

**Finish :** Black


**Protection Class :** IP 20

**Mechanical resistance :** IK 07

## OPTICS

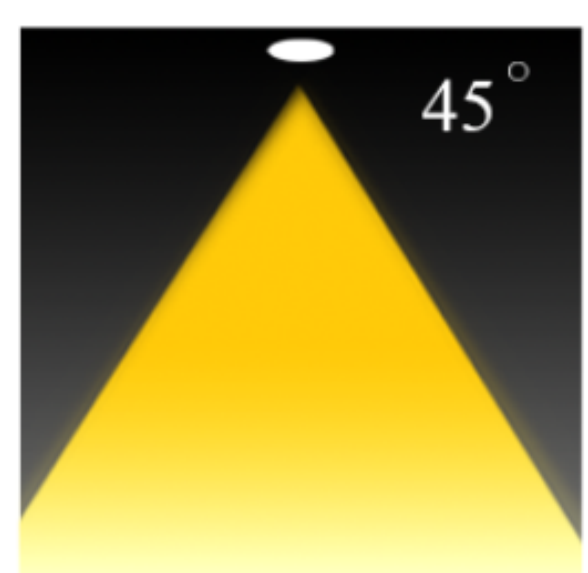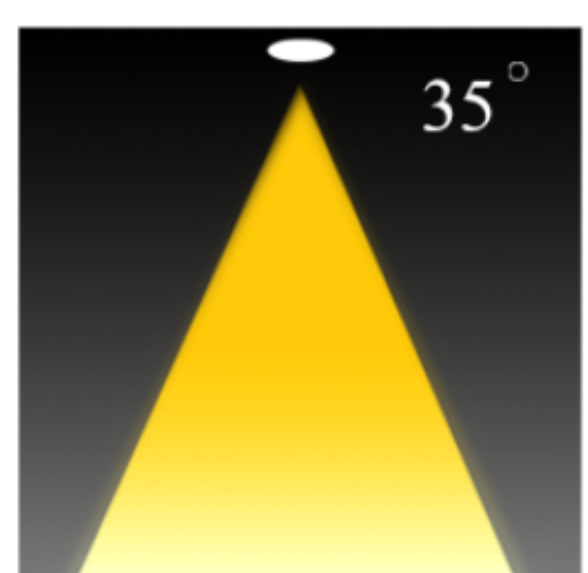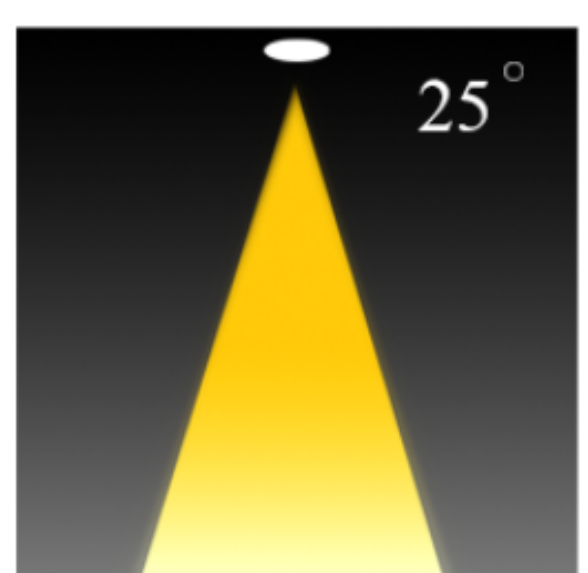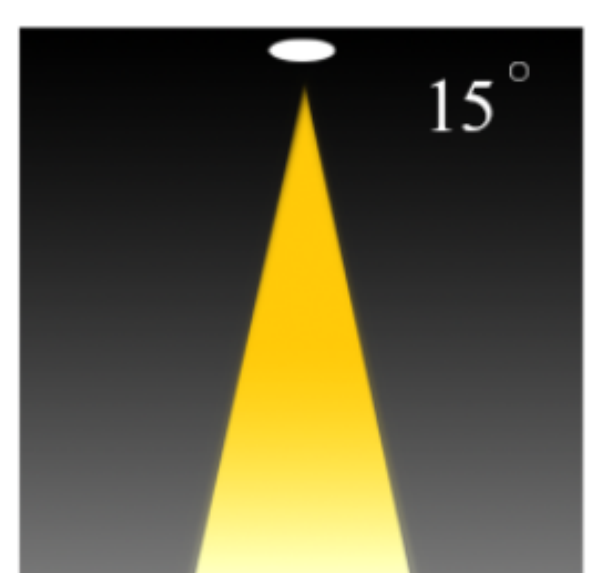

| Code             | Power<br>W | Efficacy<br>Lm/W | Colour Temp.<br>K | Dimensions<br>LxWxH mm | Driver            | LED Chip           | Weight<br>Kg |
|------------------|------------|------------------|-------------------|------------------------|-------------------|--------------------|--------------|
| MT042XX9XXXOX012 | 12         | 85               | 3000<br>4000      | 235x22x100 mm          | Tridonic<br>Ltech | Osram<br>Bridgelux | 0.200        |

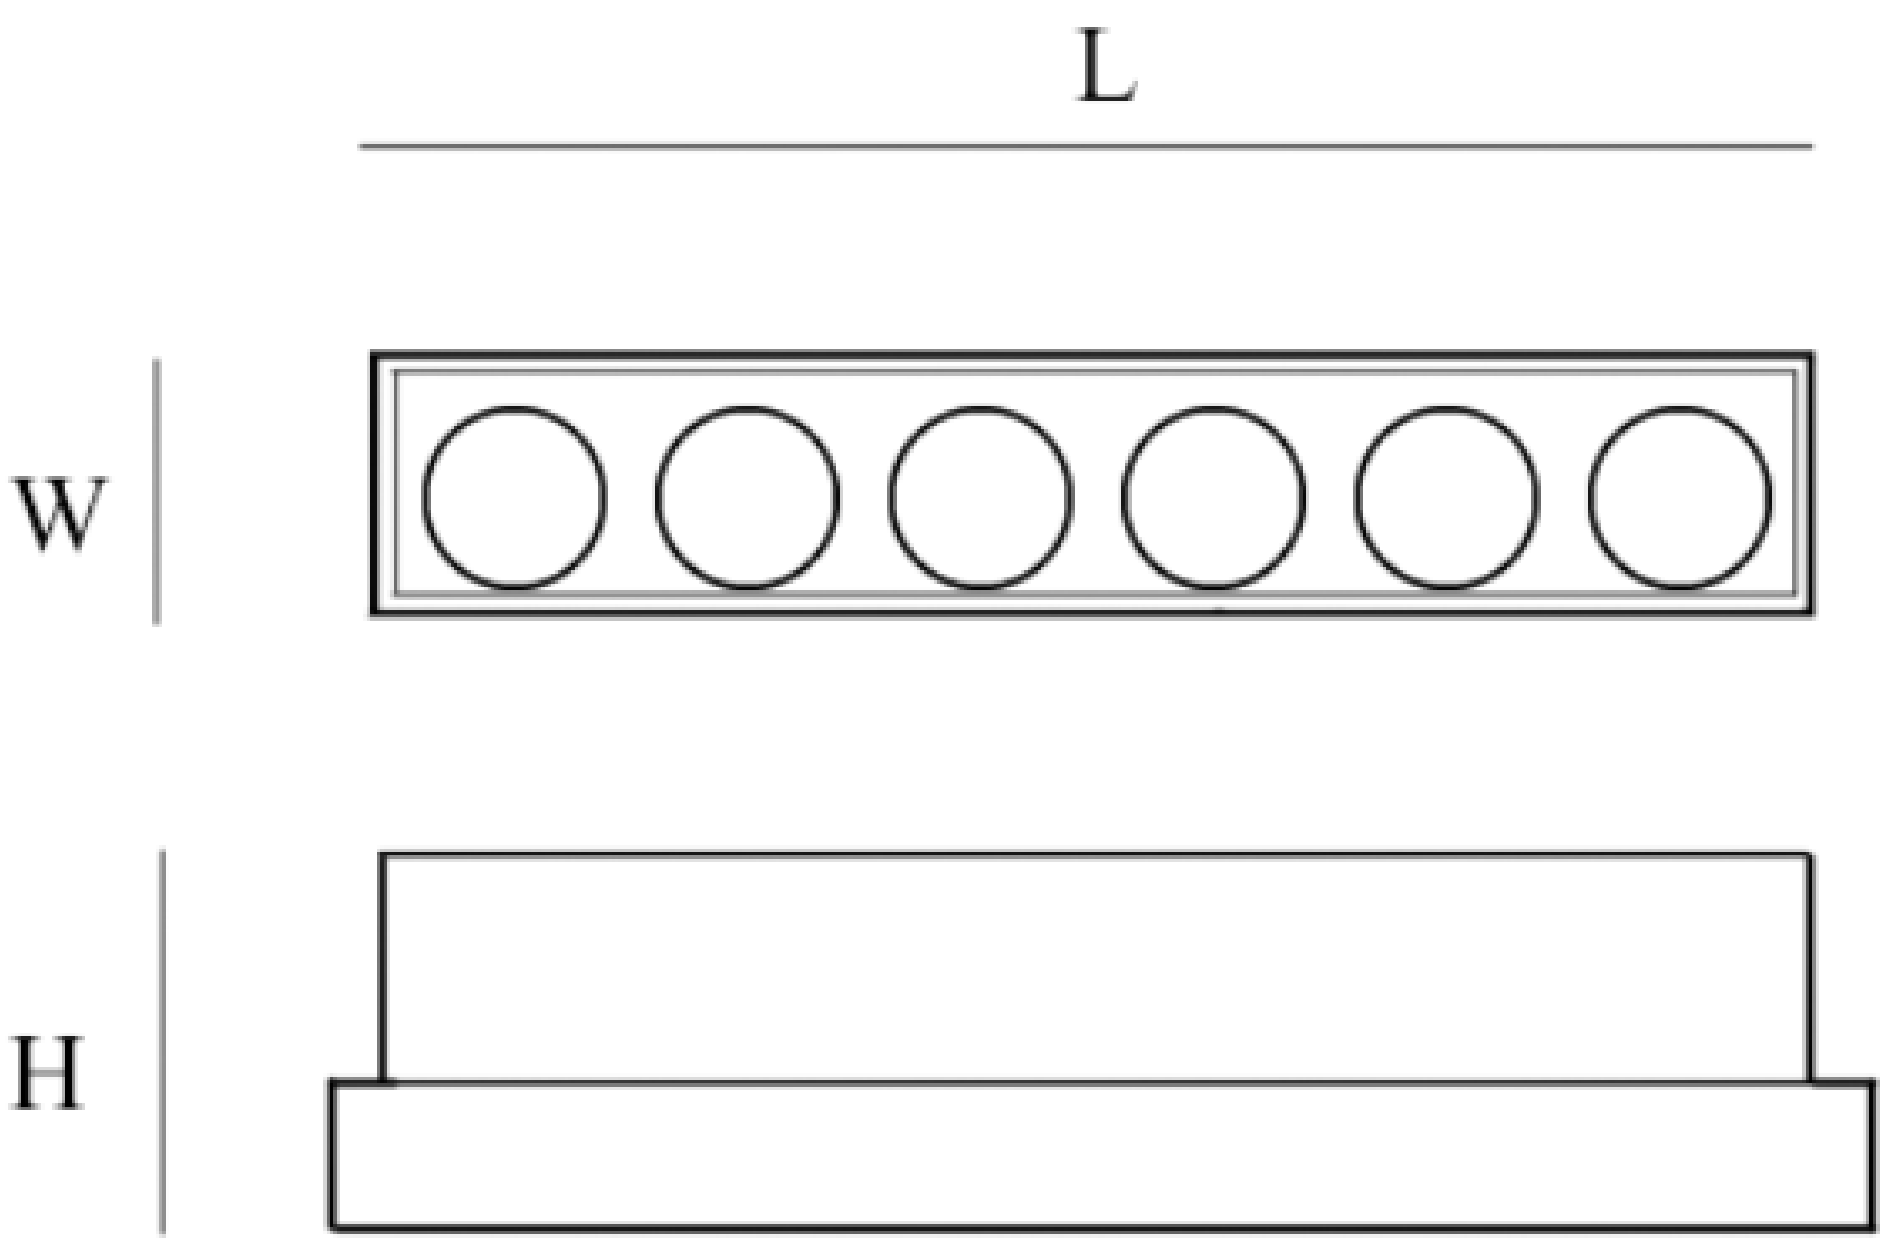

## CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

## POLAR CURVE

