

Magnetic track

SLT-MT05



PERFORMANCE DATA

Efficacy : 85 Lm/W

Input Voltage : 48V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 30,000hrs

Optic : 24 °

Class : III

MECHANICAL SPECIFICATIONS

Material : Die Casting Aluminum

Mounting : Magnetic track light





Lens : Glass

Finish : Black


Protection Class : IP 20

Mechanical resistance : IK 07

OPTICS

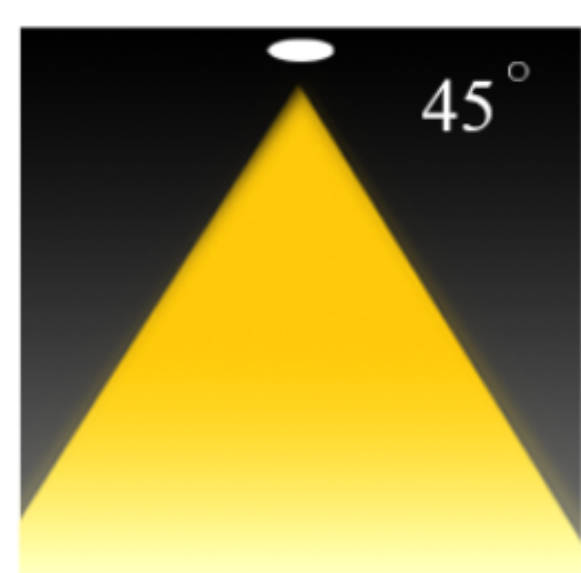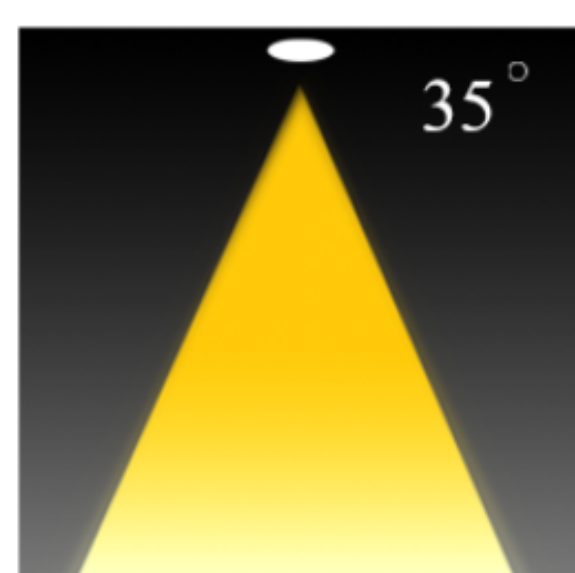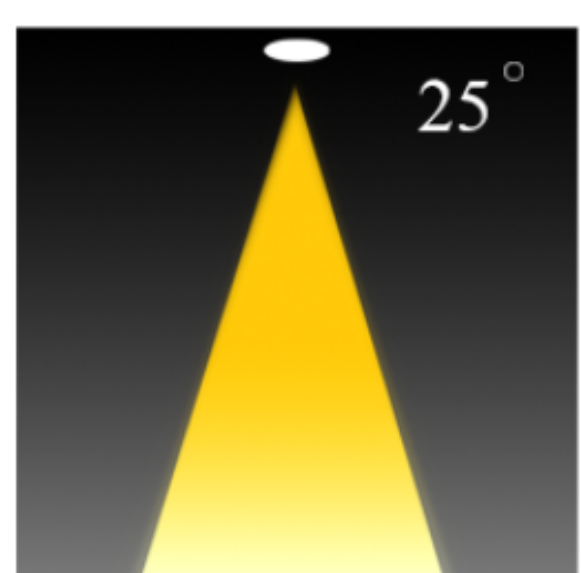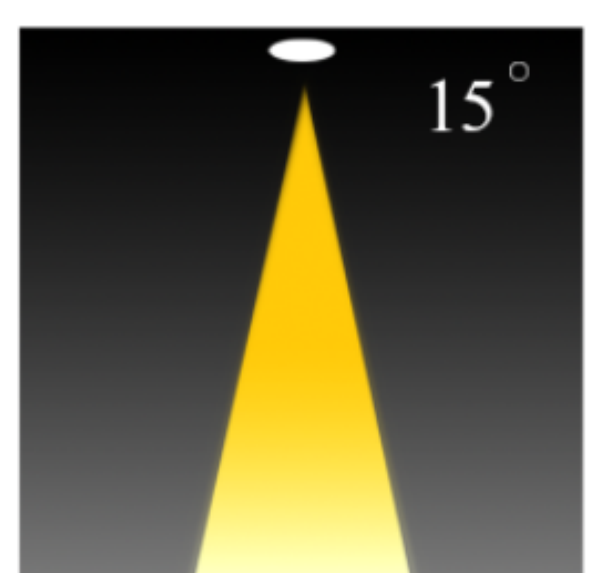

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø xL mm	Driver	LED Chip	Weight Kg
MT052409XXXOX024	24	85	4000	76×182 mm	Tridonic Ltech	Osram Bridgelux	0.400

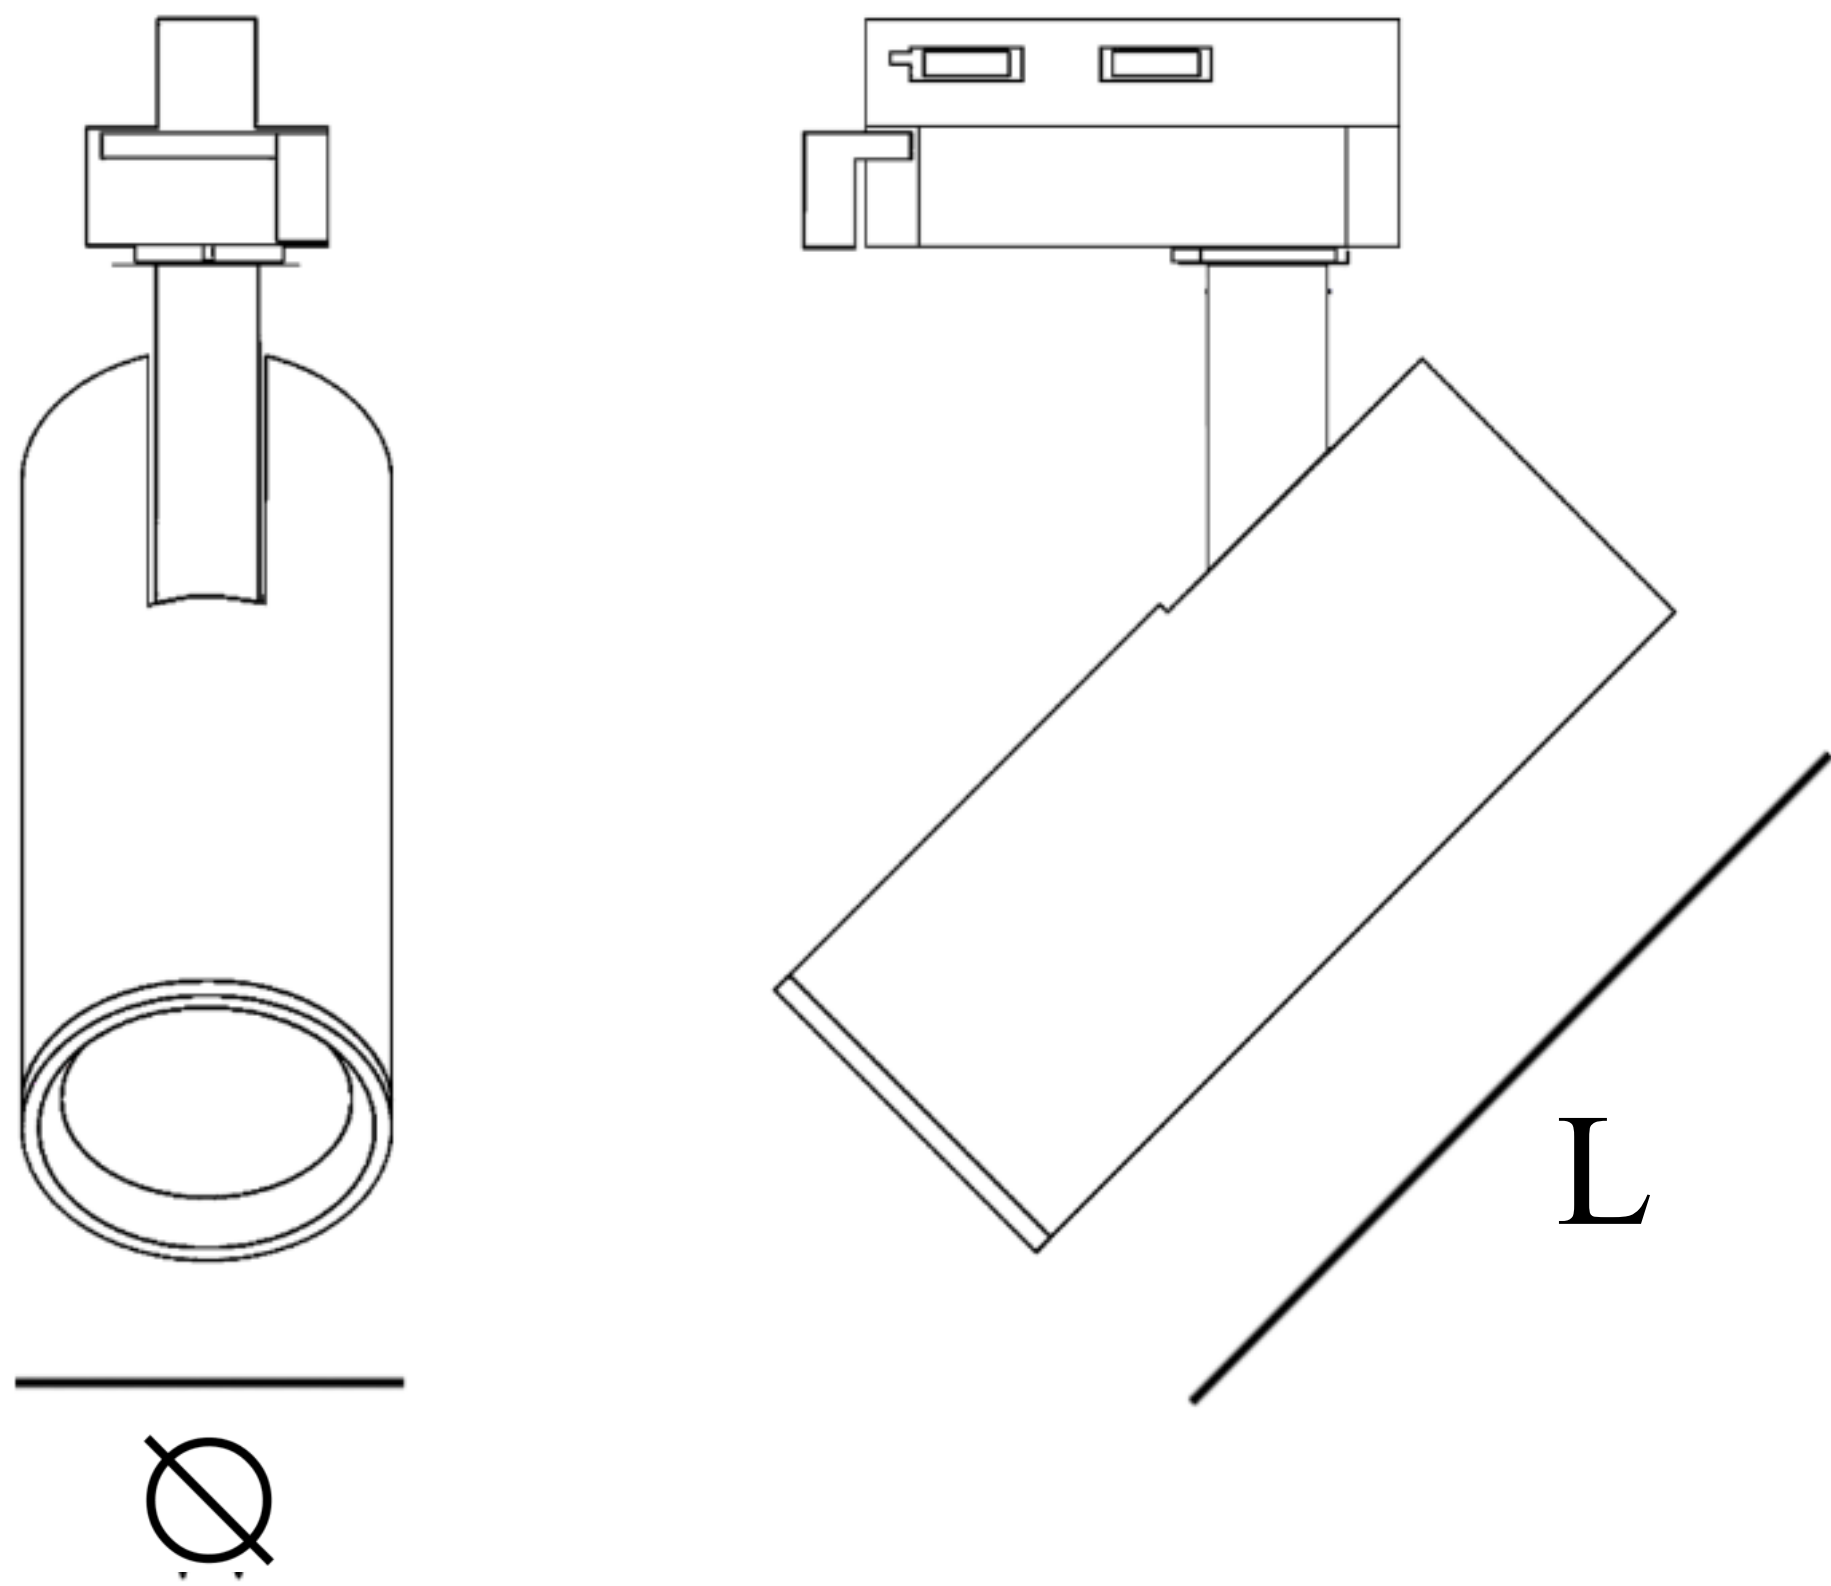

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

