

Projector

SLT-P102



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 28°

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast

Mounting : Surface Mounted

Lens : Tampered Pressure resistance Glass


Finish : Gray RAL 7016

Protection Class : IP 65


Mechanical Resistance : IK 08



OPTICS

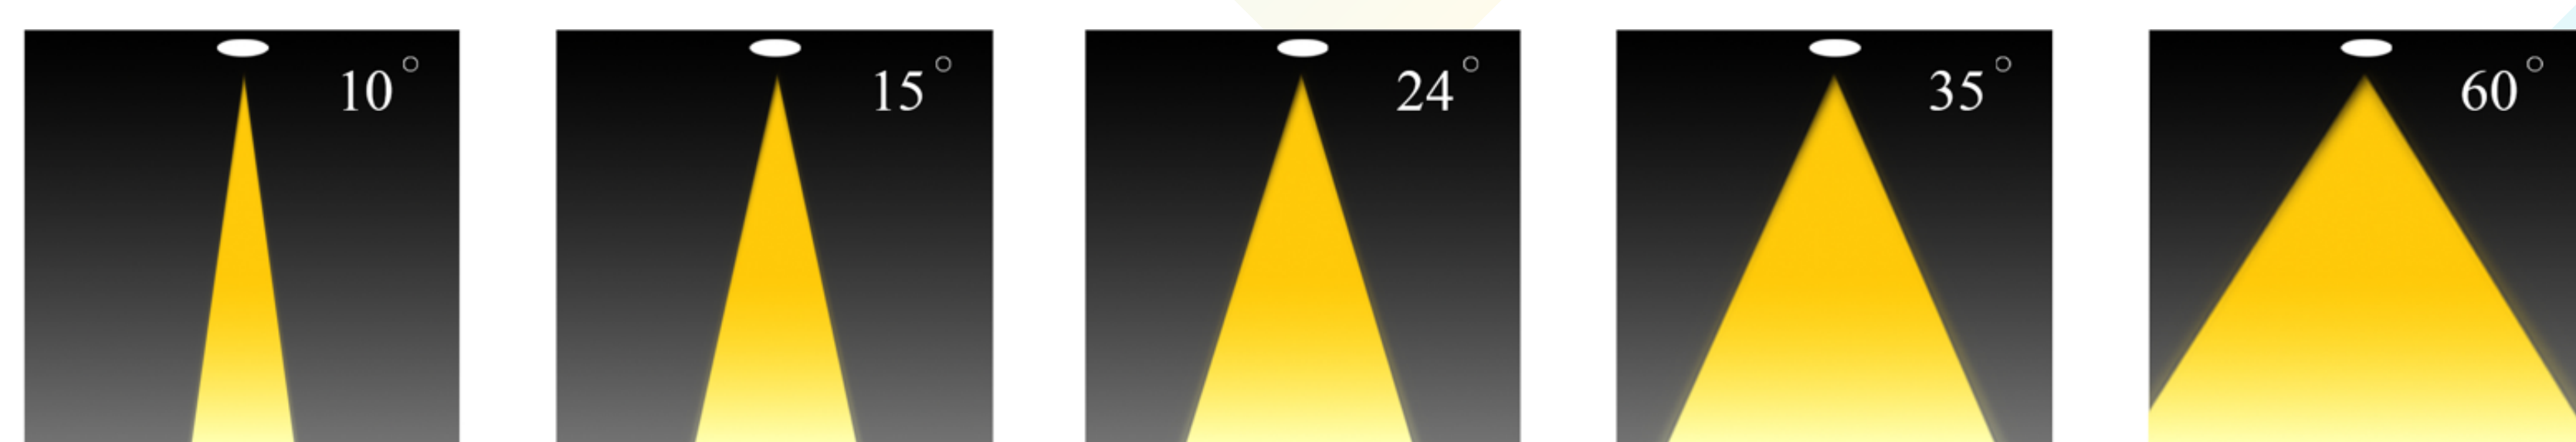

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅xLxH mm	Driver	LED Chip	Weight Kg
P1022308XXXCTXXX	10 14 20 24	90	3000	155x190x240 mm	Tridonic	Cree	

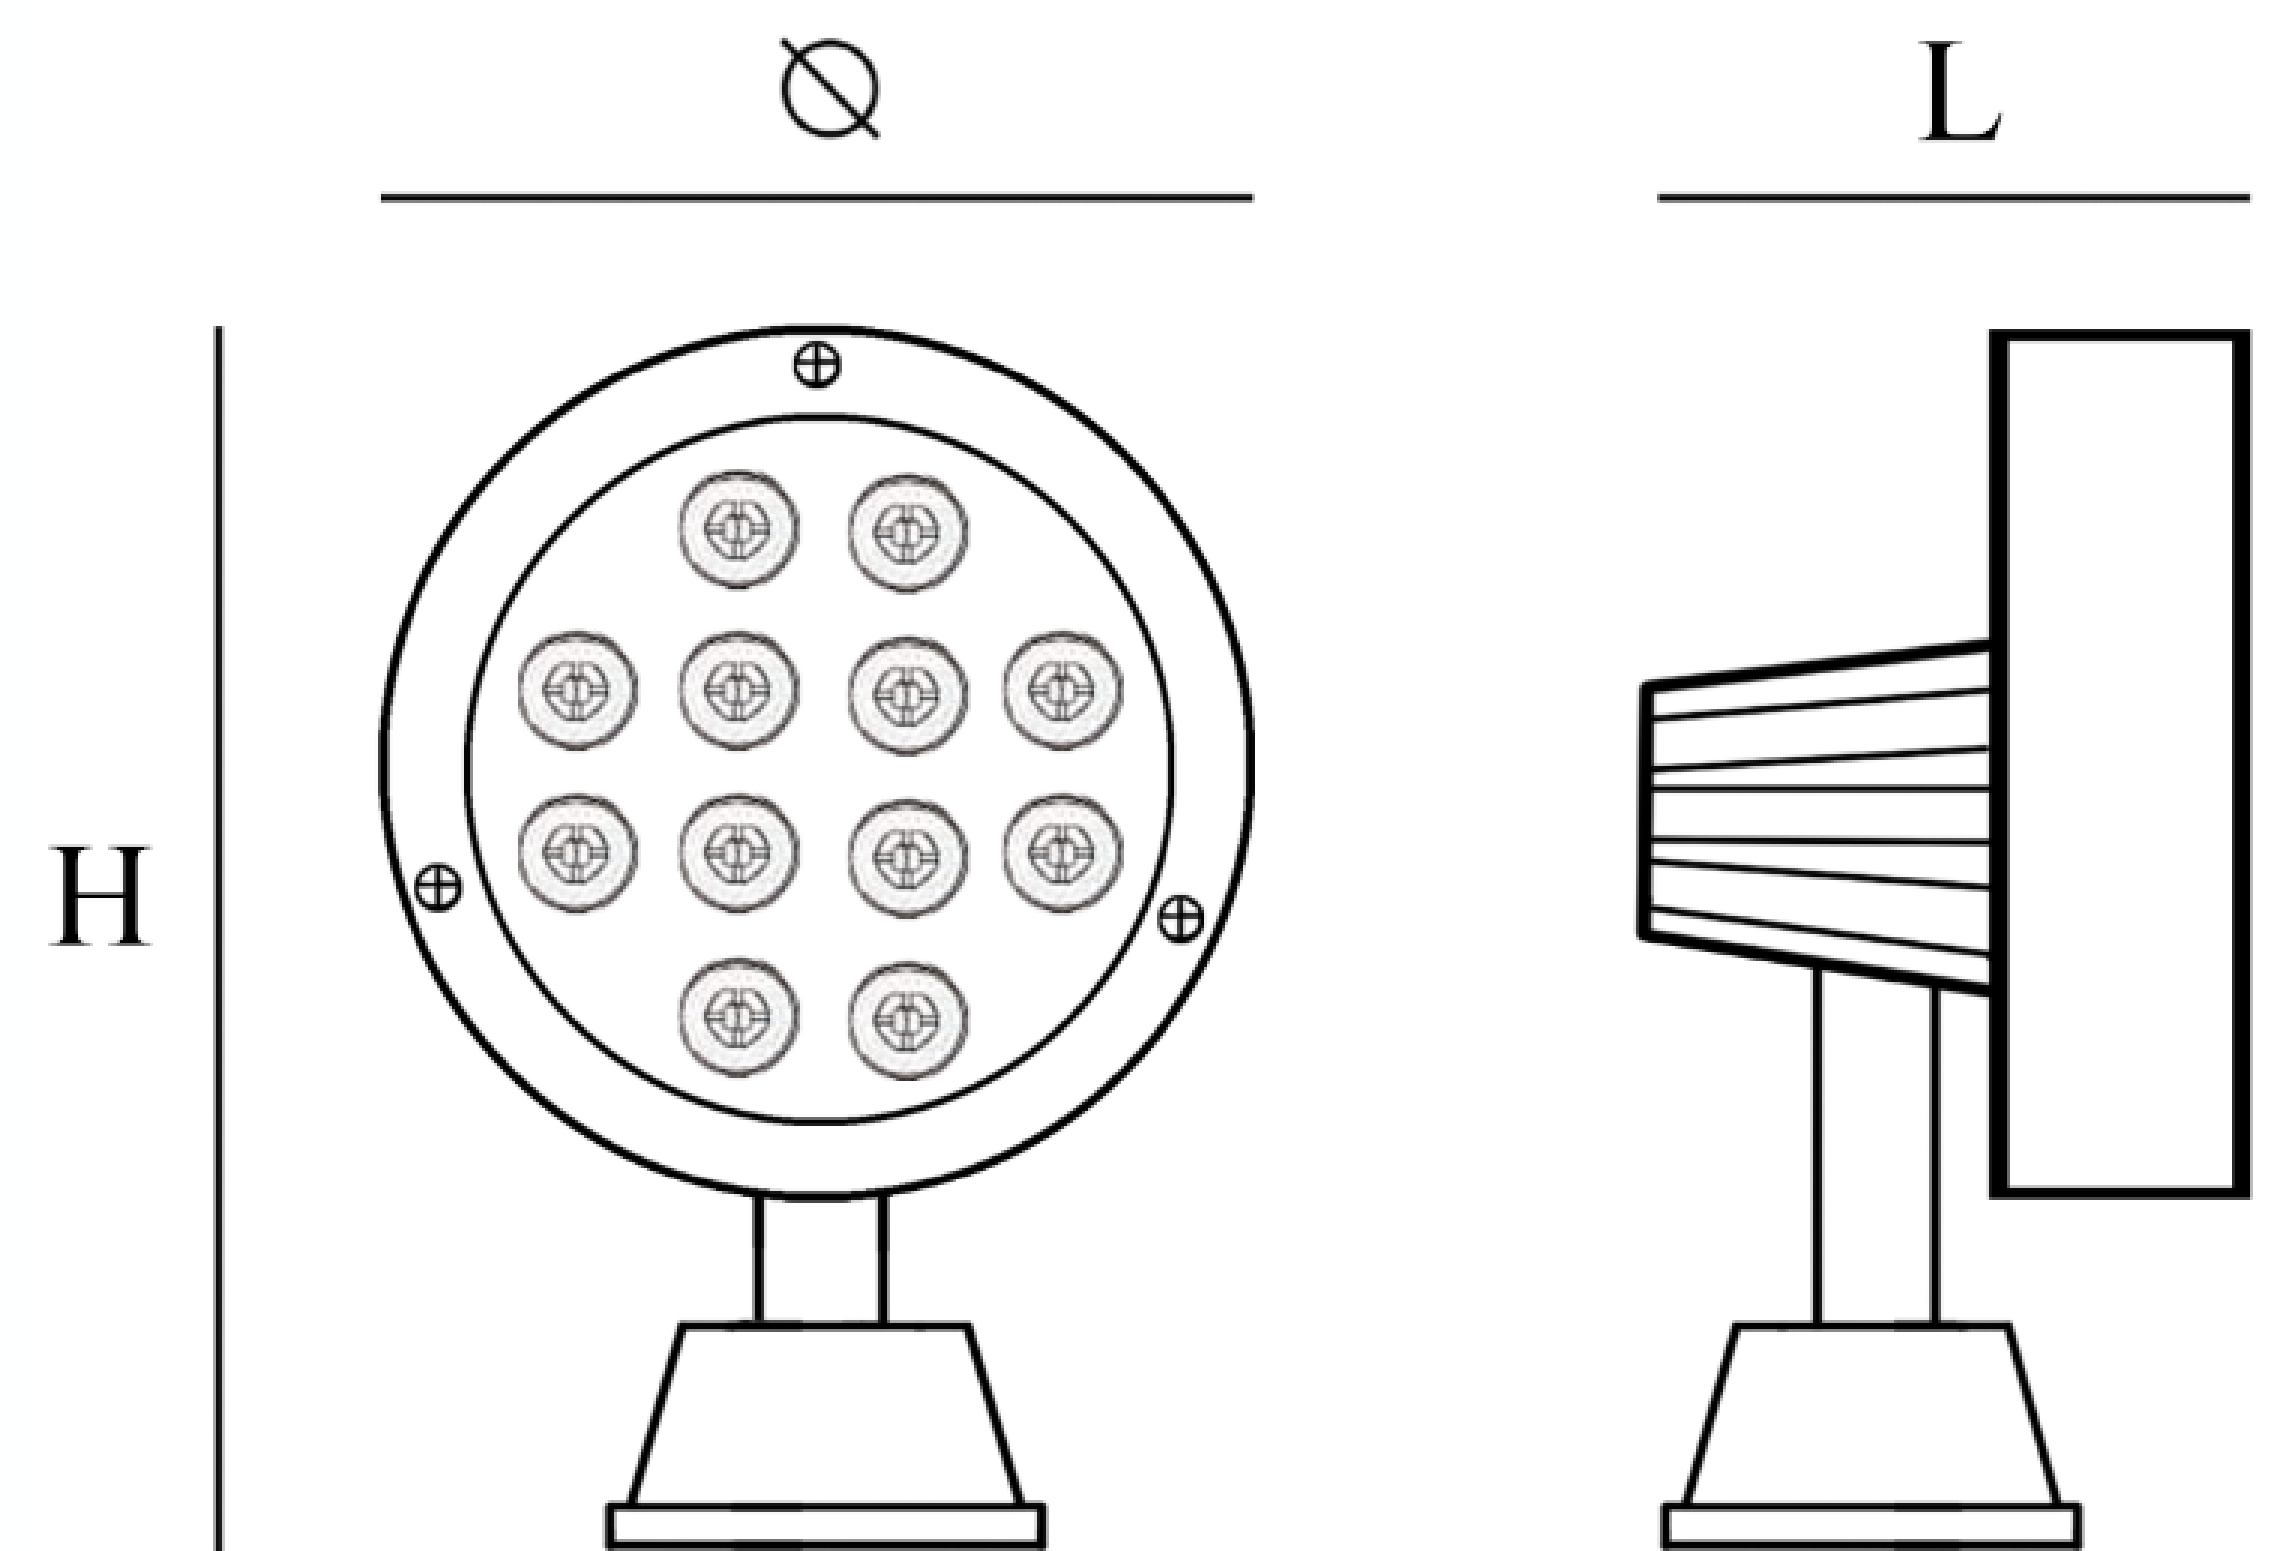

CUSTOMISZE OPTIONS

POLAR CURVE

3K	4K	6.5K	CRI >80	DALI
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80	

