

linear Aluminum profile

SLT-RL1060



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : AC85-265V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : Recessed


Lens : Polycarbonate

Finish : White


Protection Class : IP 40

Mechanical Resistance : IK 03

OPTICS

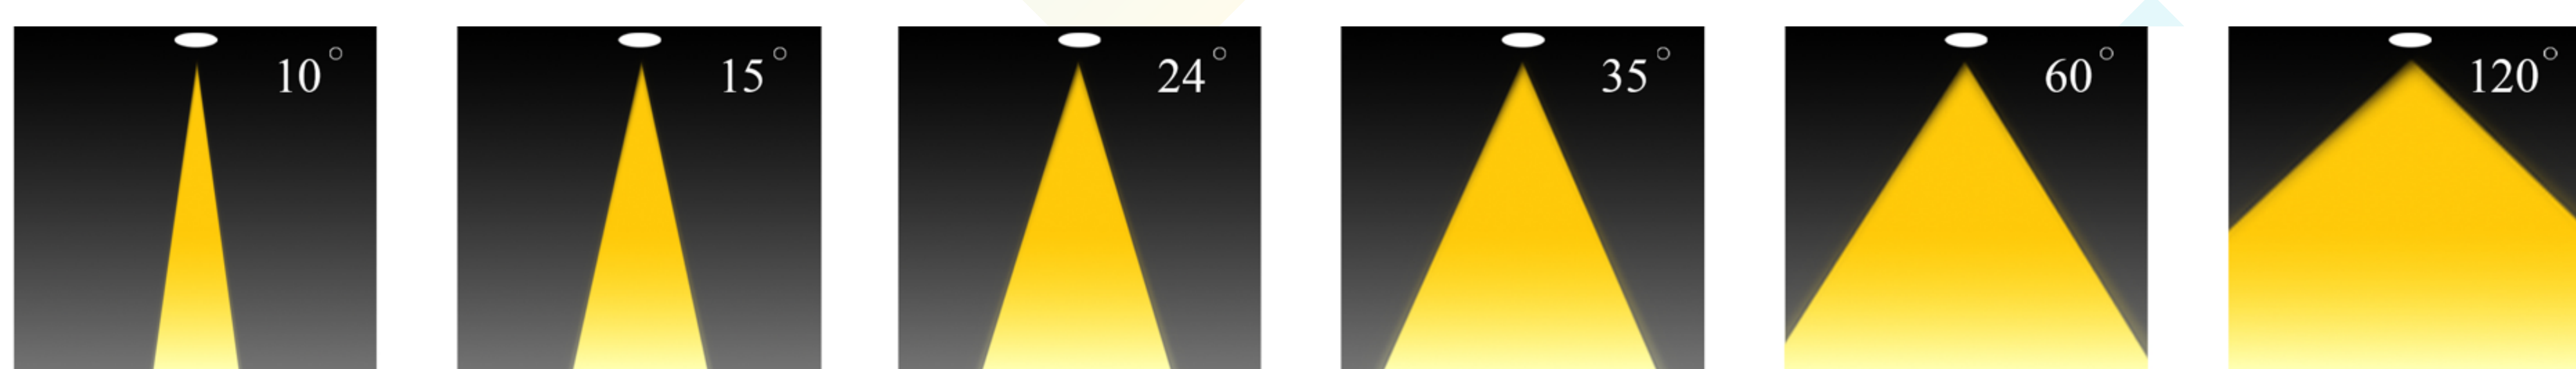

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Weight
RL1662XX8120OX024	24	130	3000 4000 6500	600x50x70 mm	Tridonic Done	Osram	

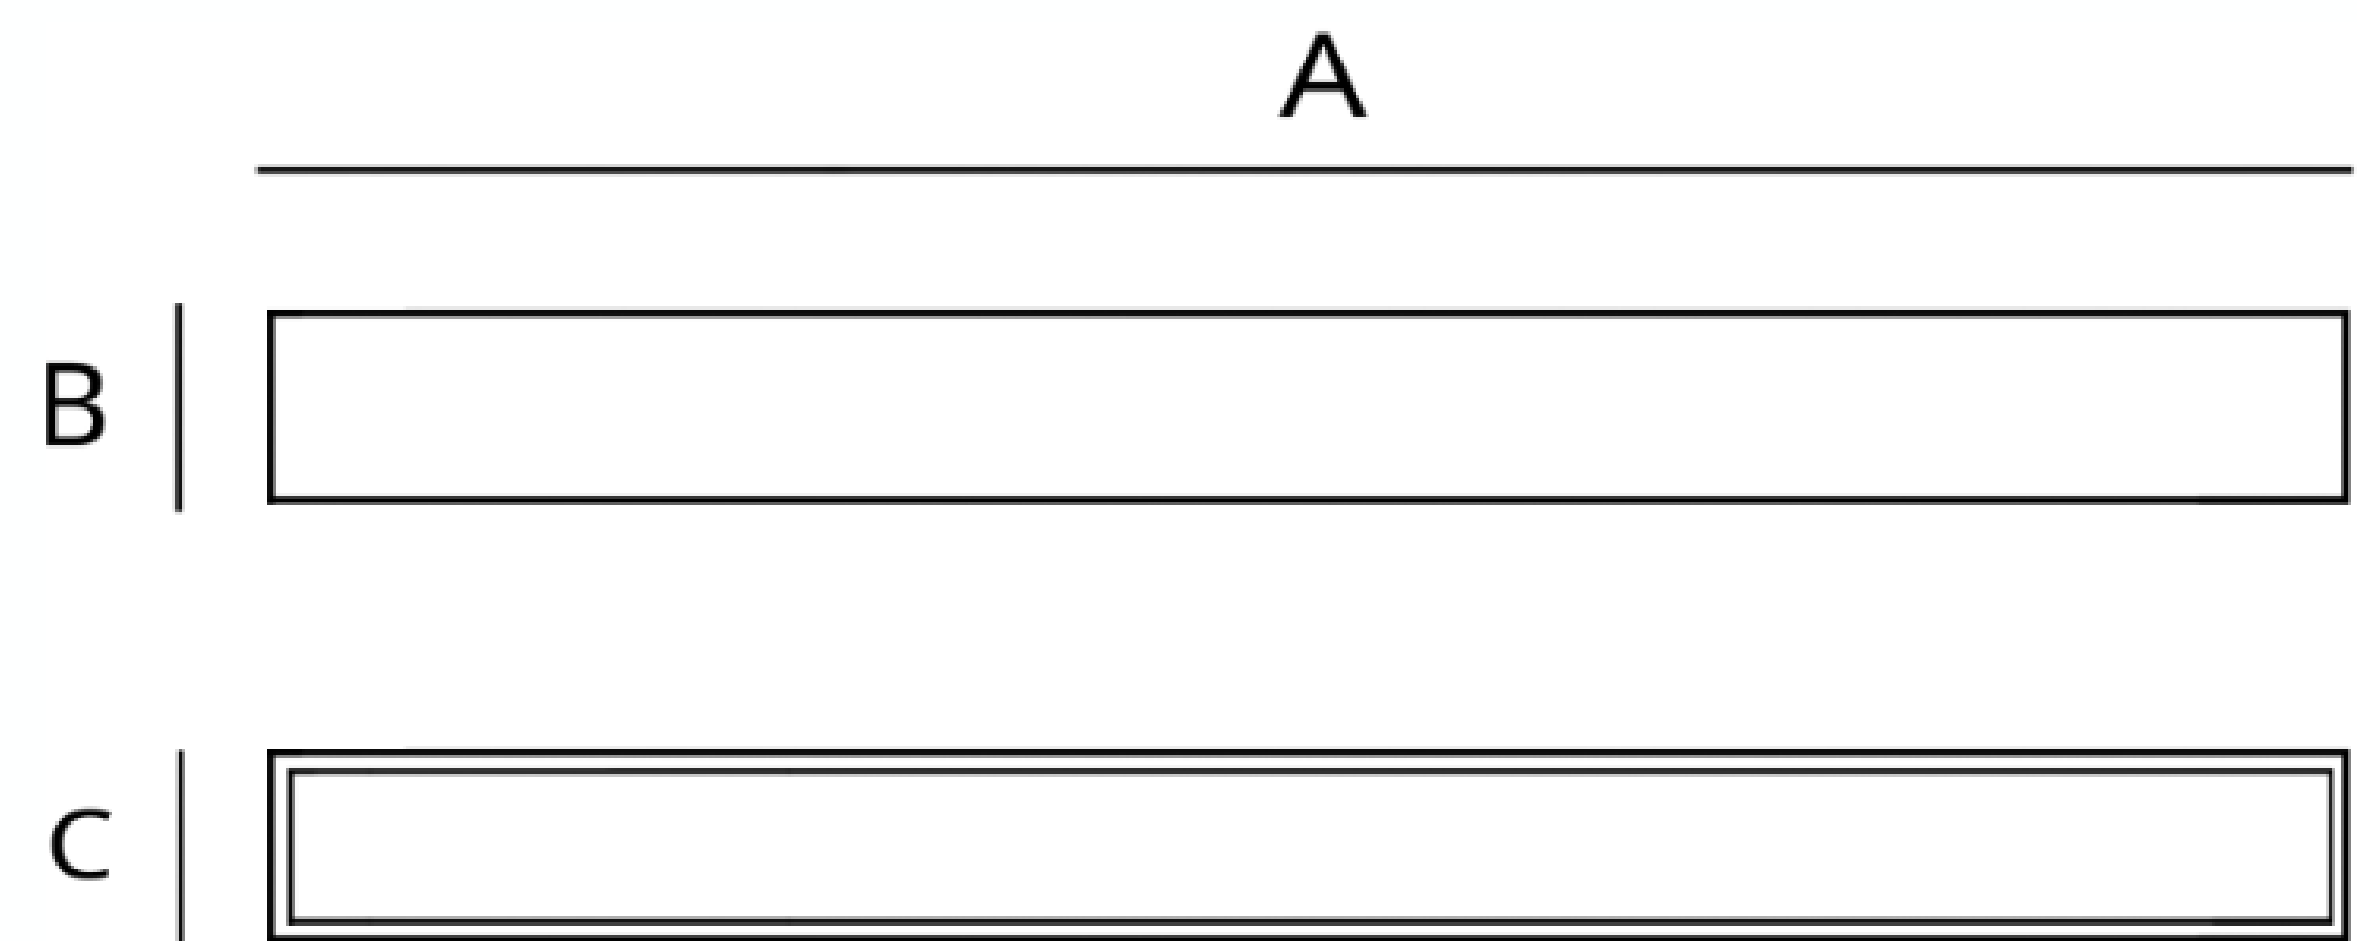

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

FINISH

White
Gray

DALI

POLAR CURVE

