

linear Aluminum profile

SLT-RL1120



PERFORMANCE DATA

Efficacy : 130 Lm/W

Input Voltage : AC85-265V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 4000K

Life Time : 50.000 hrs

Optic : 120 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Extruded Aluminum

Mounting : Recessed







Lens : Polycarbonate

Finish : White


Protection Class : IP 40

Mechanical Resistance : IK 03

OPTICS

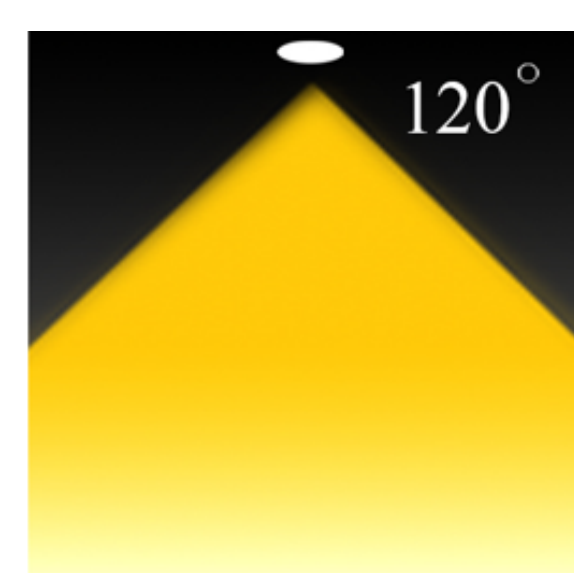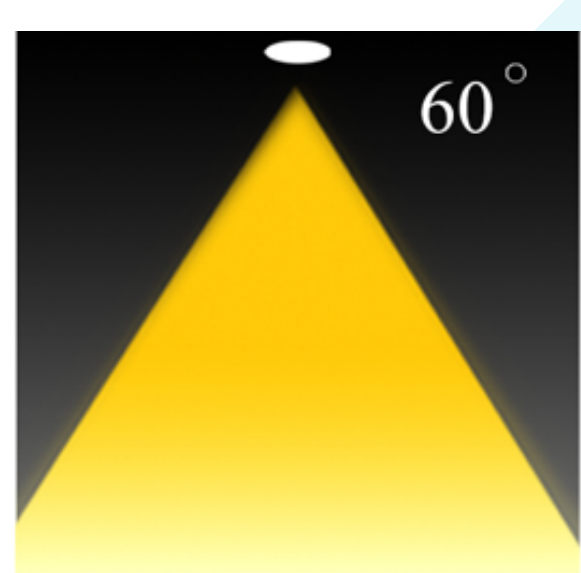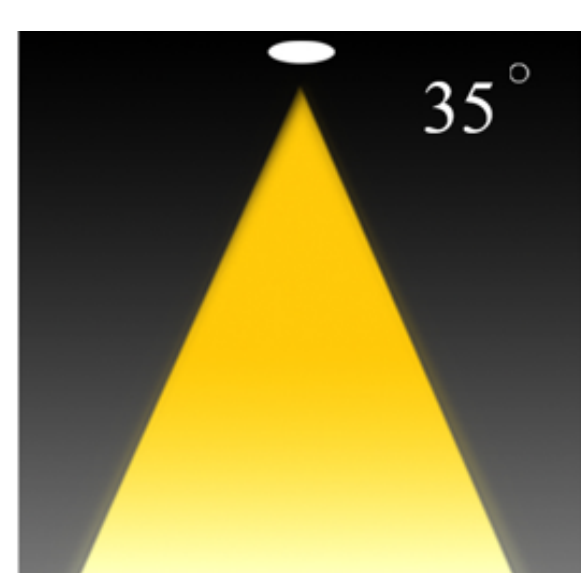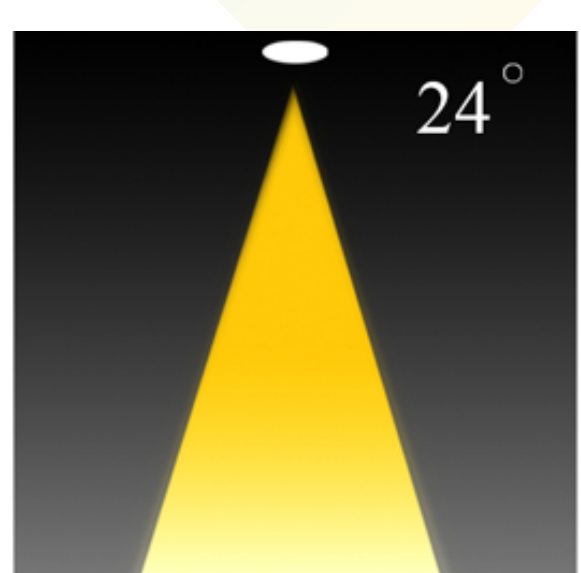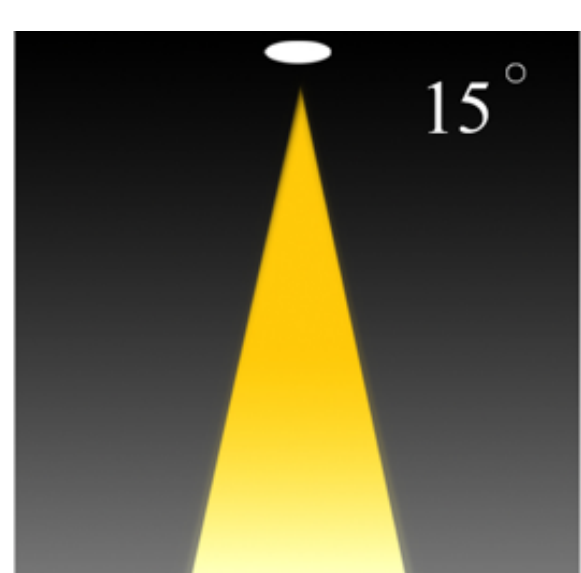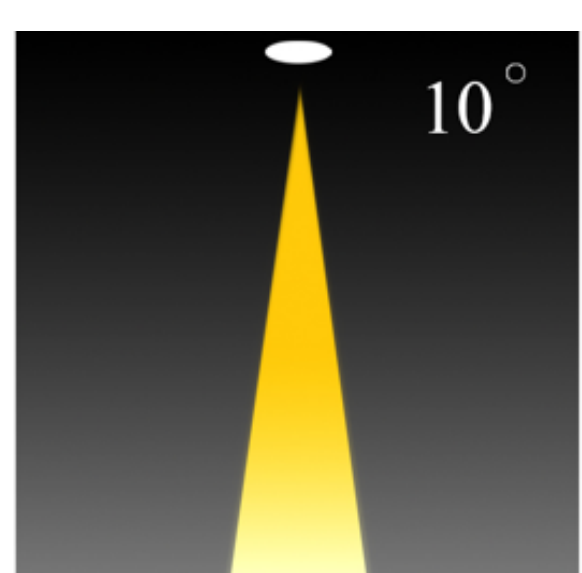

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions AxBxC mm	Driver	LED Chip	Weight
RL167XXX8120OT036	36	130	3000 4000 6000	1200x50x70 mm	Tridonic Done	Osram	

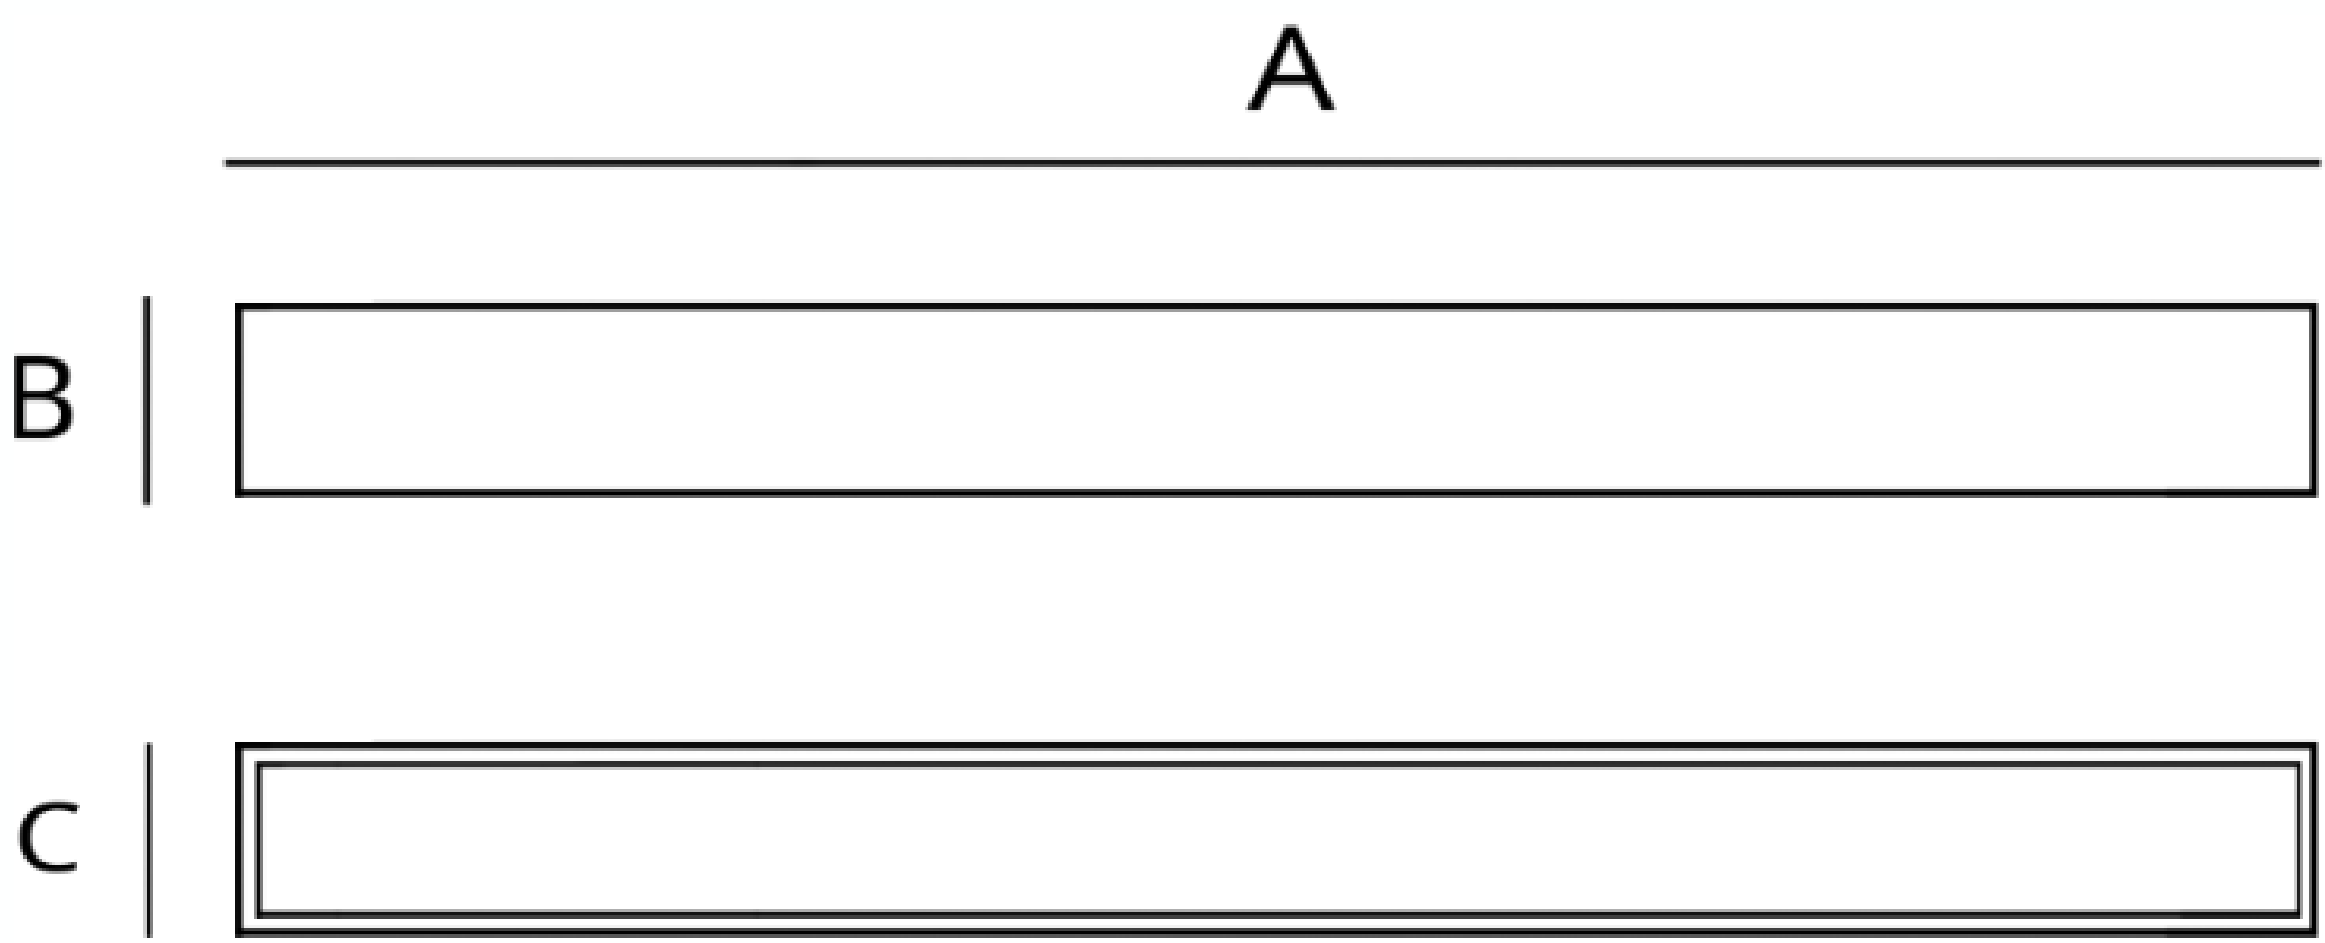

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI >80

Color Rendering Index >80

FINISH

White Gray

DALI

POLAR CURVE

