

# Spike

SLT-S102



## PERFORMANCE DATA

**Efficacy :** 87.6 Lm/W

**Input Voltage :** 110-240V

**Frequency :** 50-60 Hz

**Color Rendering :** CRI 80

**Color Temperature :** 3000K

**Life Time :** 50.000 hrs

**Optic :** 24°

**Class :** I

## MECHANICAL SPECIFICATIONS

**Material :** Aluminum Die Cast

**Mounting :** In Ground



**Lens :** Clear Tampered Glass

**Finish :** Gray RAL 7016

**Protection Class :** IP 65


**Mechanical Resistance :** IK 08

## OPTICS

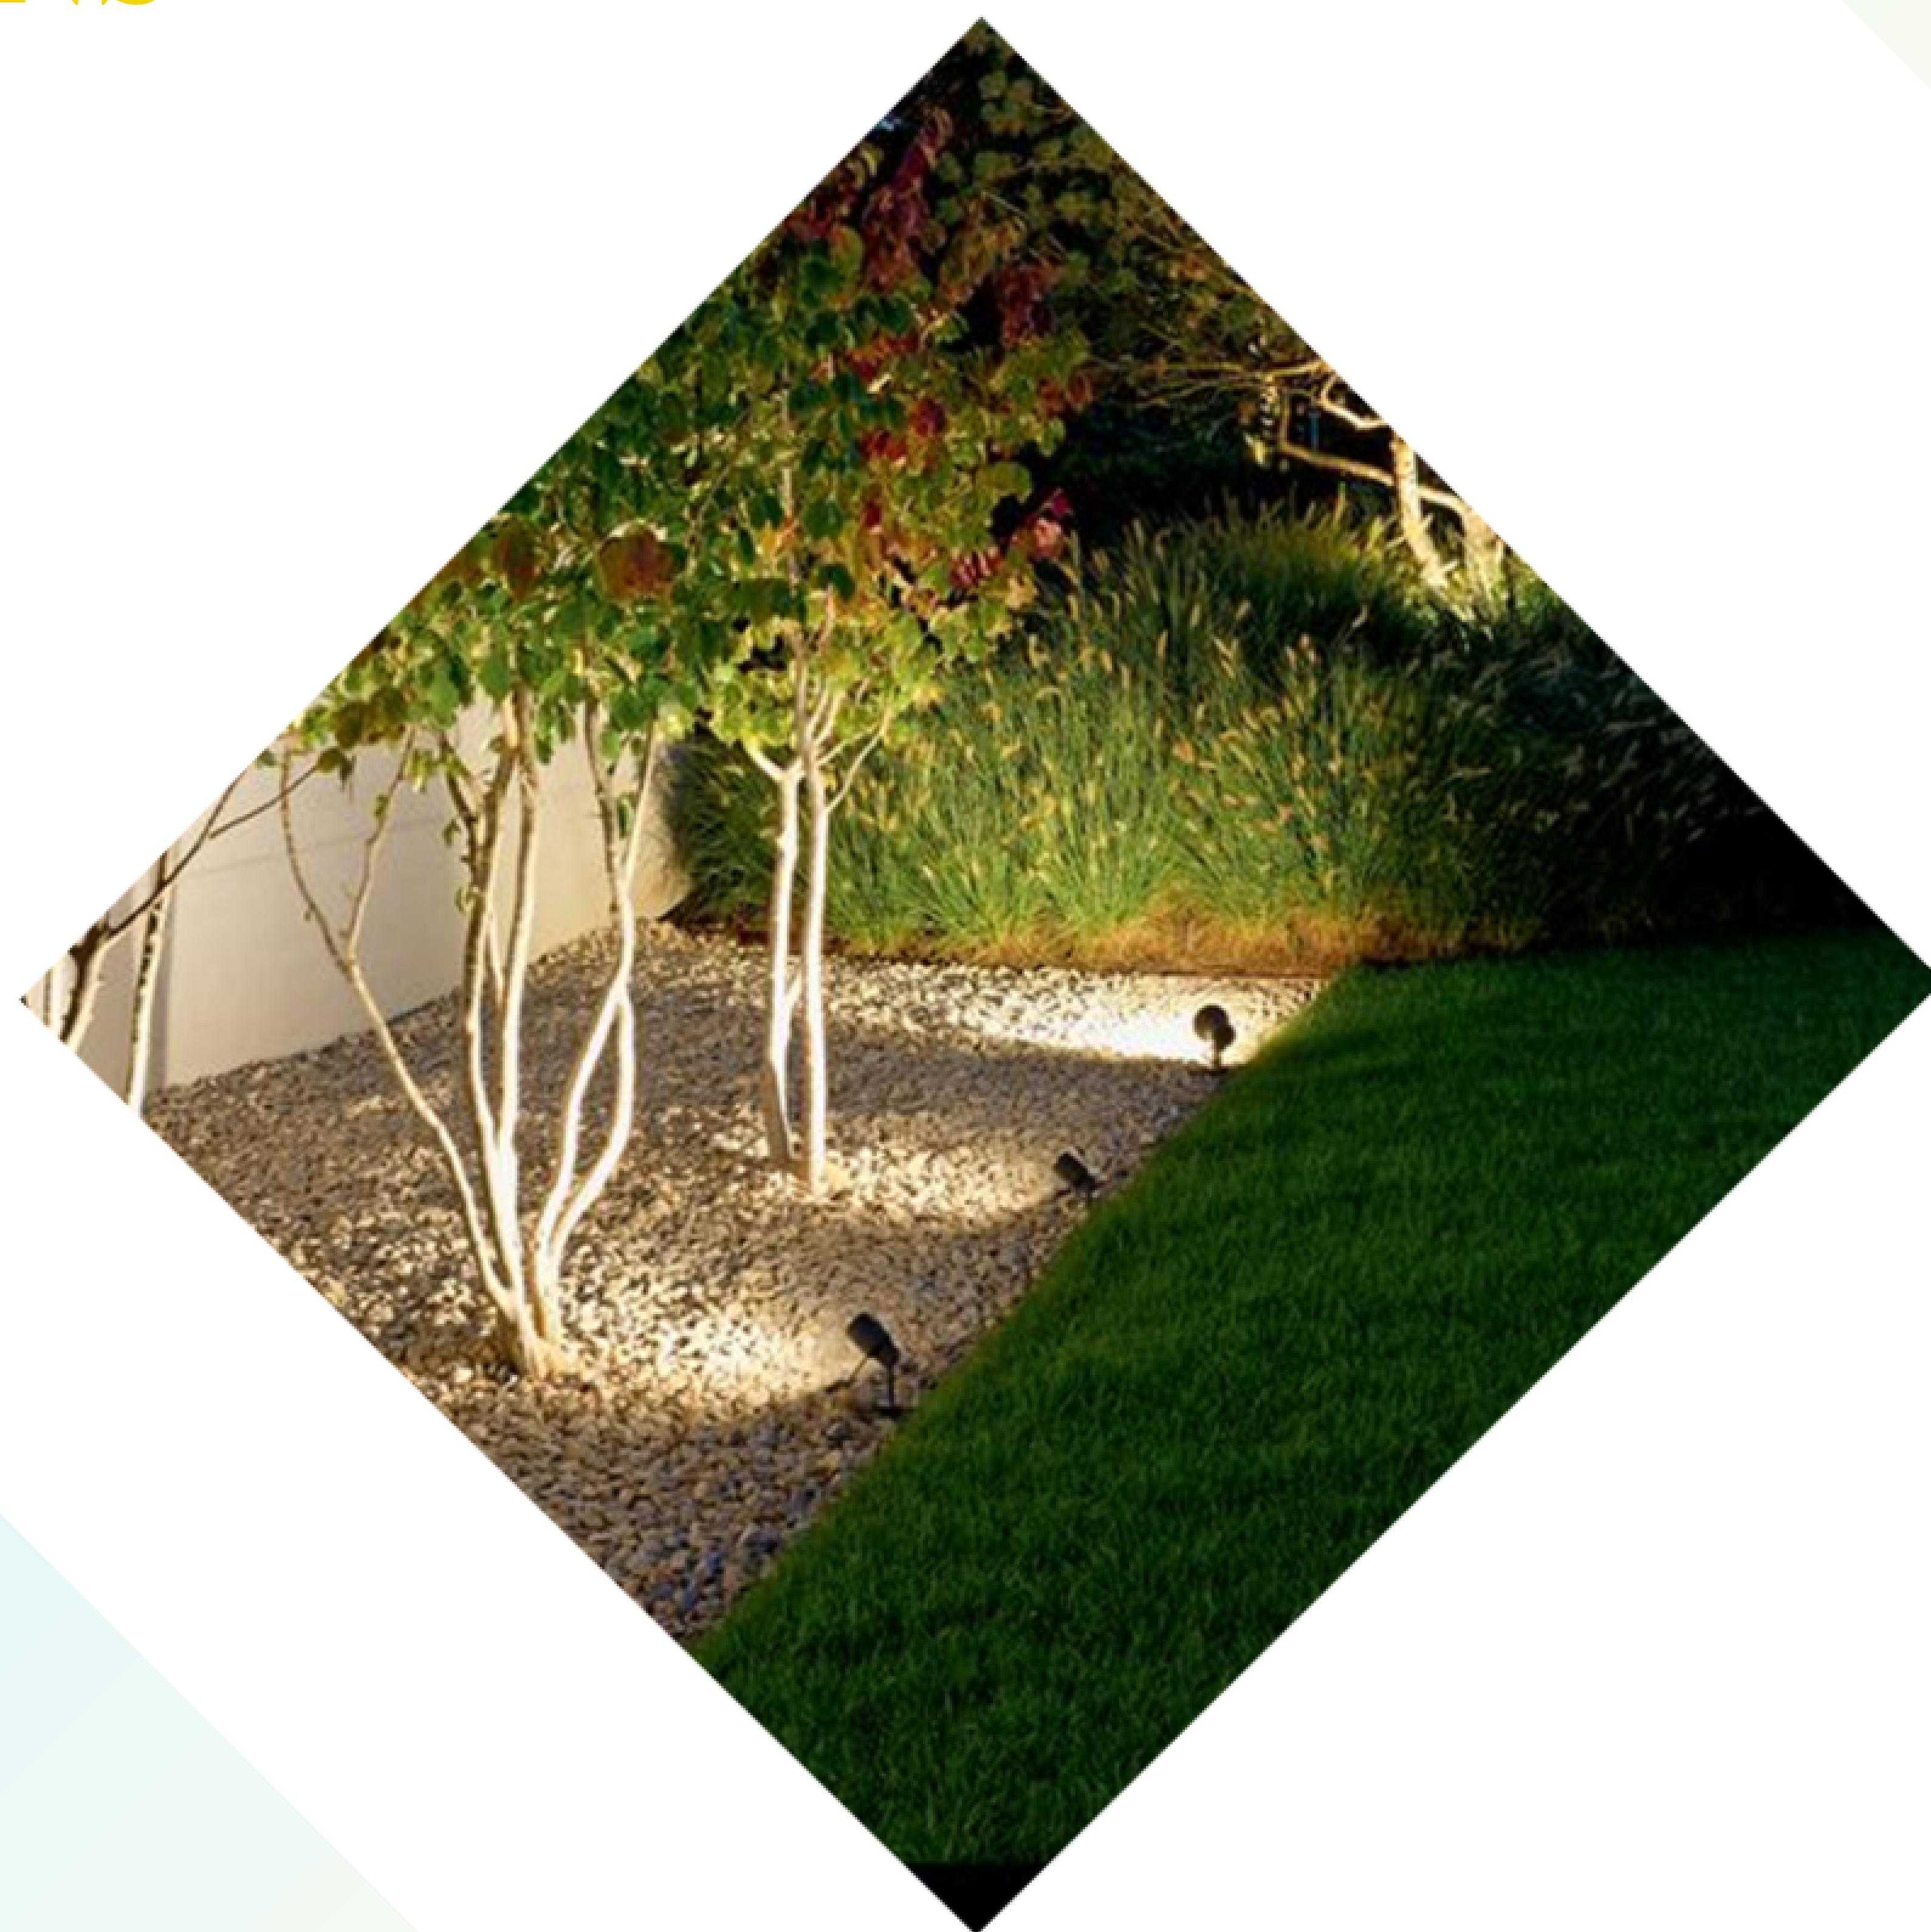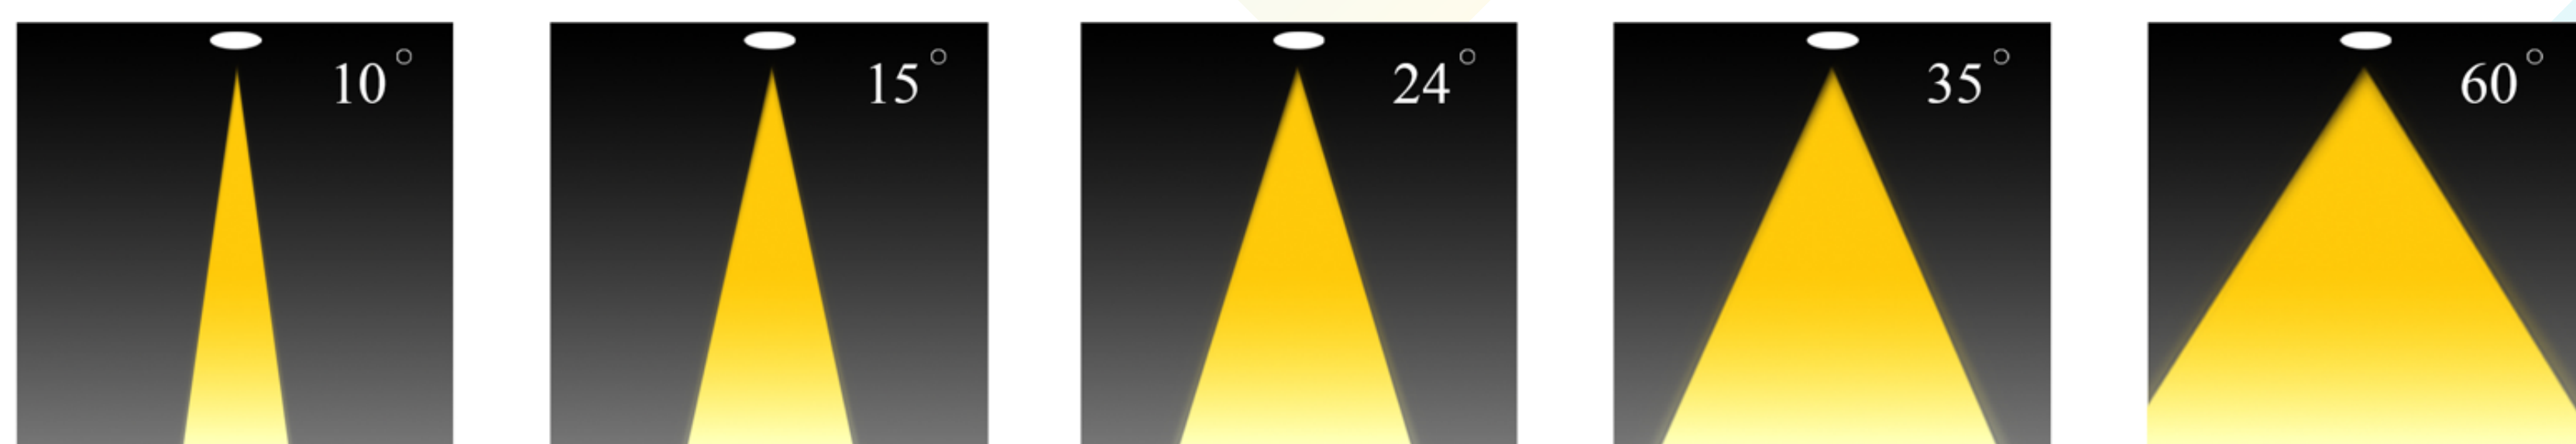



Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø xH mm	Driver	LED Chip	Weight Kg
S102330X0XXCD006	6	87.6	3000	64x350 mm	Done	Cree	0.595

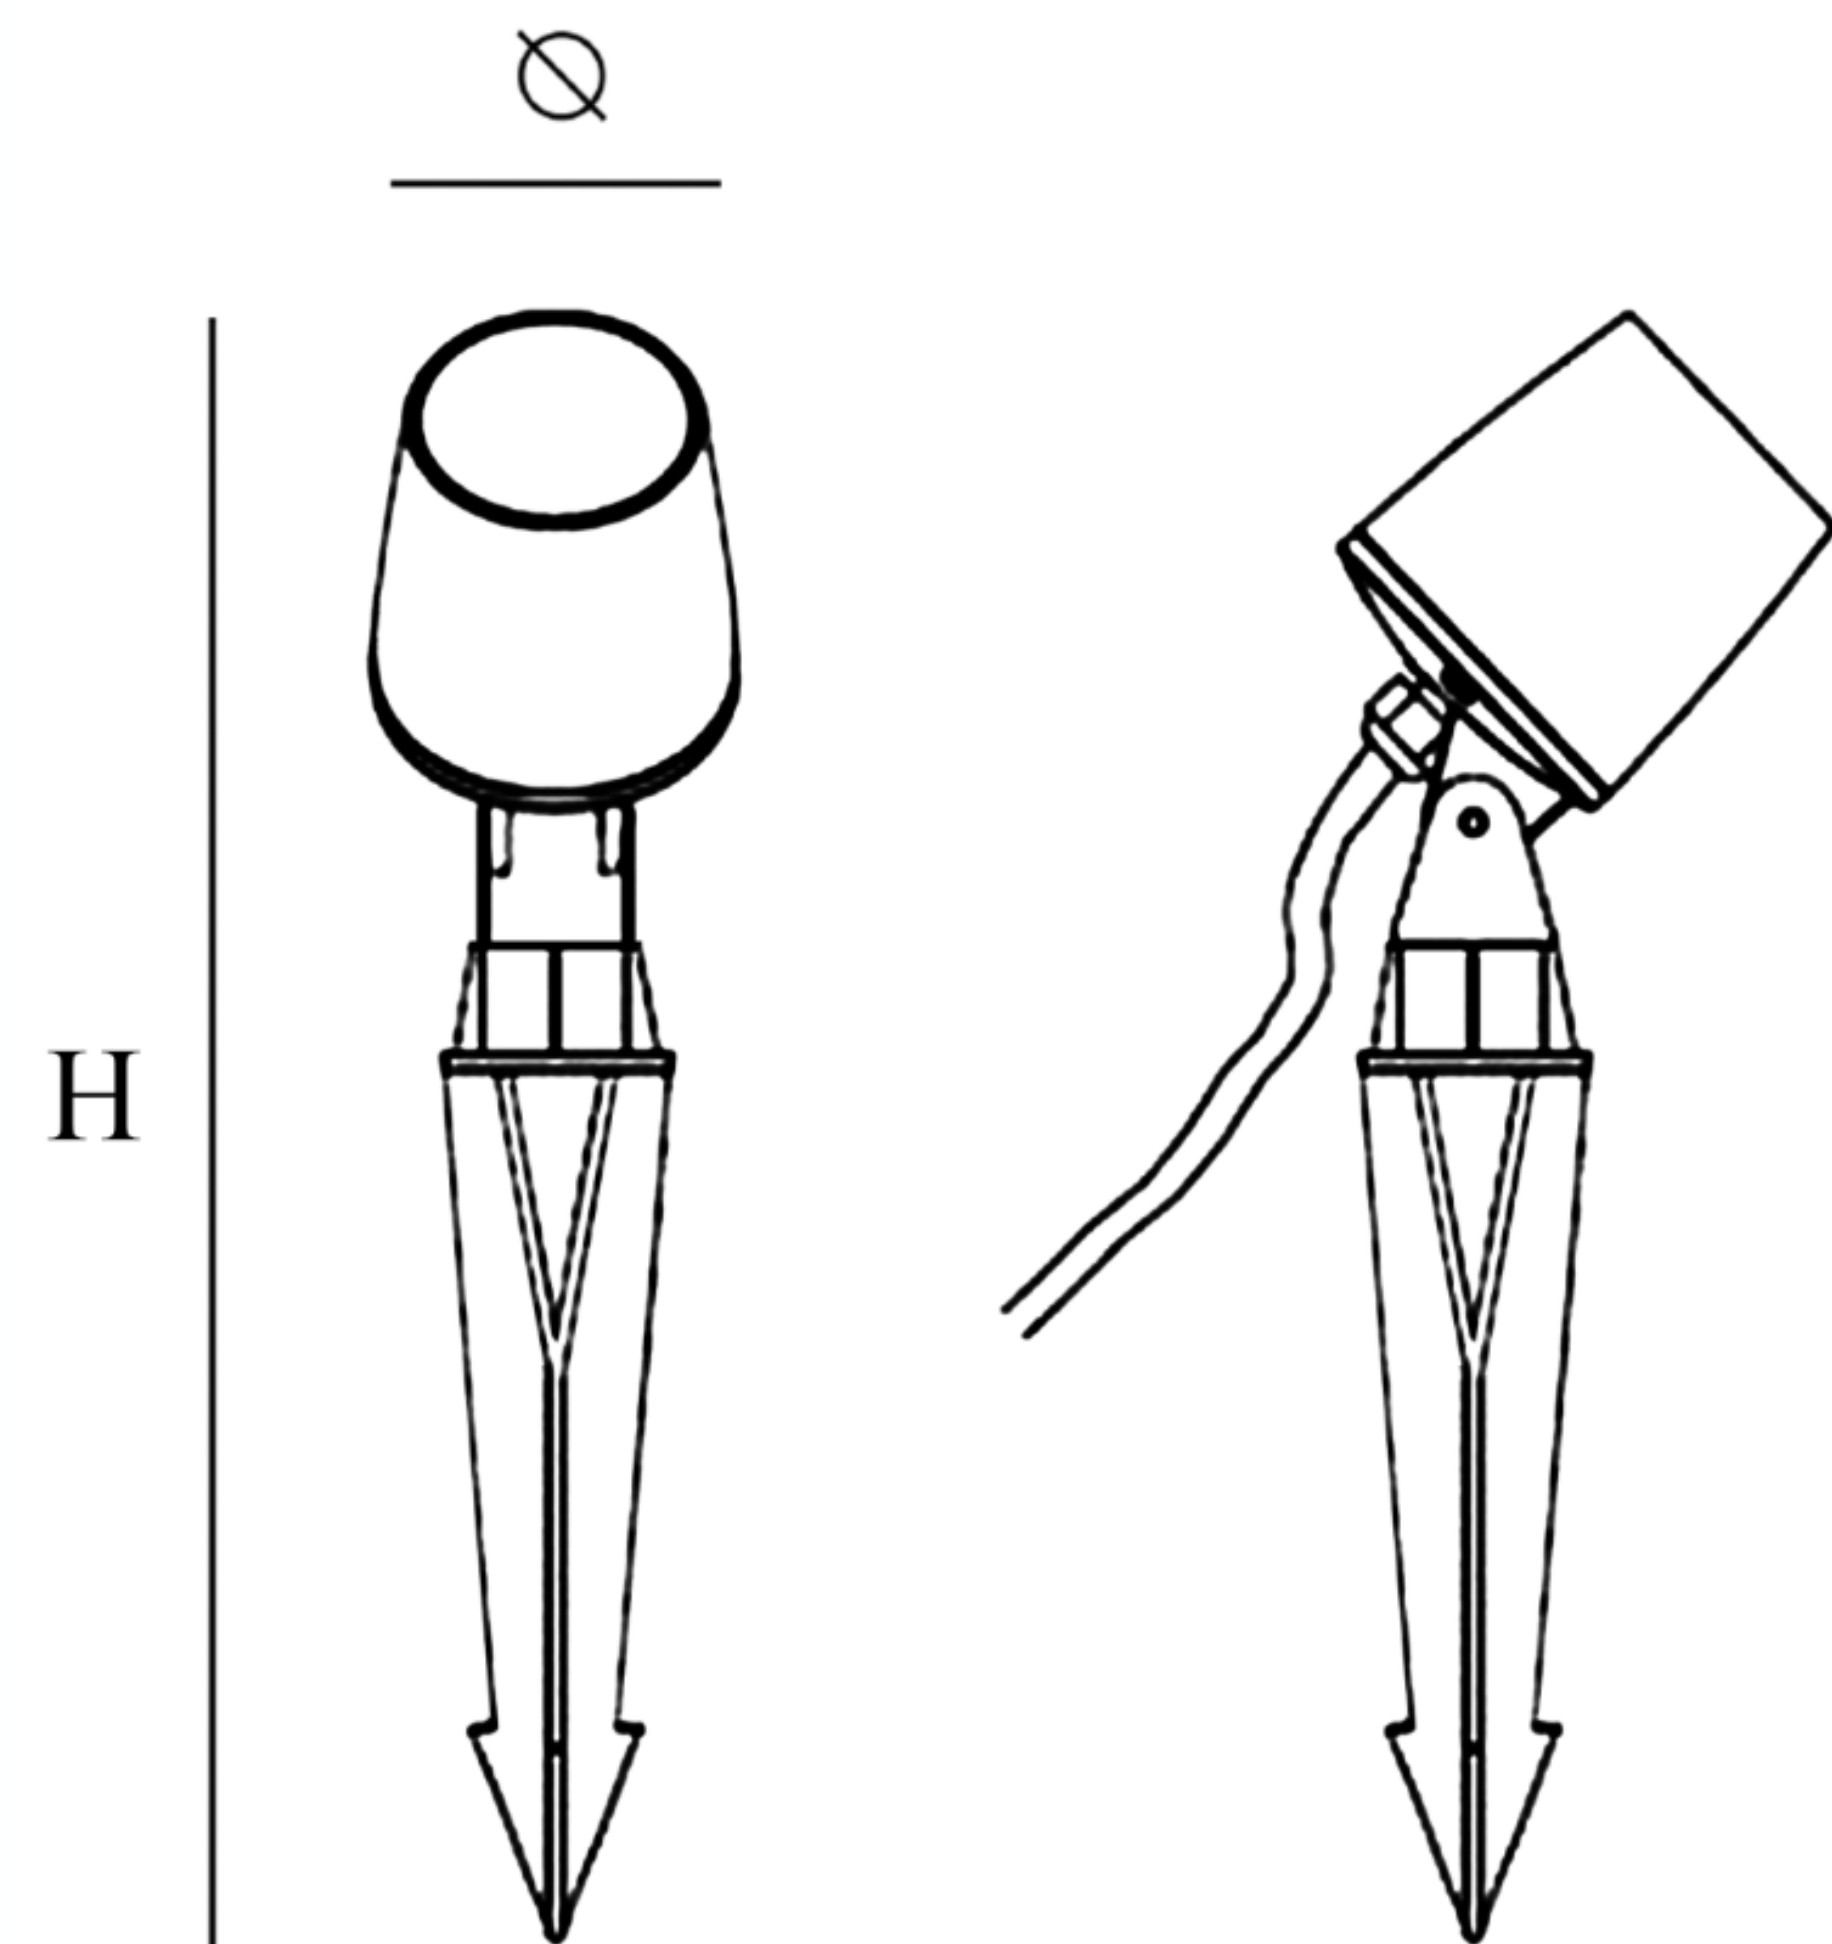

## CUSTOMISZE OPTIONS

## POLAR CURVE

**3K**

Light  
Temperature  
3000K

**4K**

Light  
Temperature  
4000K

**6.5K**

Light  
Temperature  
6500K

**CRI  
>80**

Color  
Rendering  
Index >80

**DALI**

