

Spike

SLT-S104



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240V

Frequency : 50-60 Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 60 °

Class : I

MECHANICAL SPECIFICATIONS

Material : Aluminum Die Cast

Mounting : In Ground



Lens : Glass

Finish : Black


Protection Class : IP 65 - IP 67

Mechanical Resistance : IK 08

OPTICS

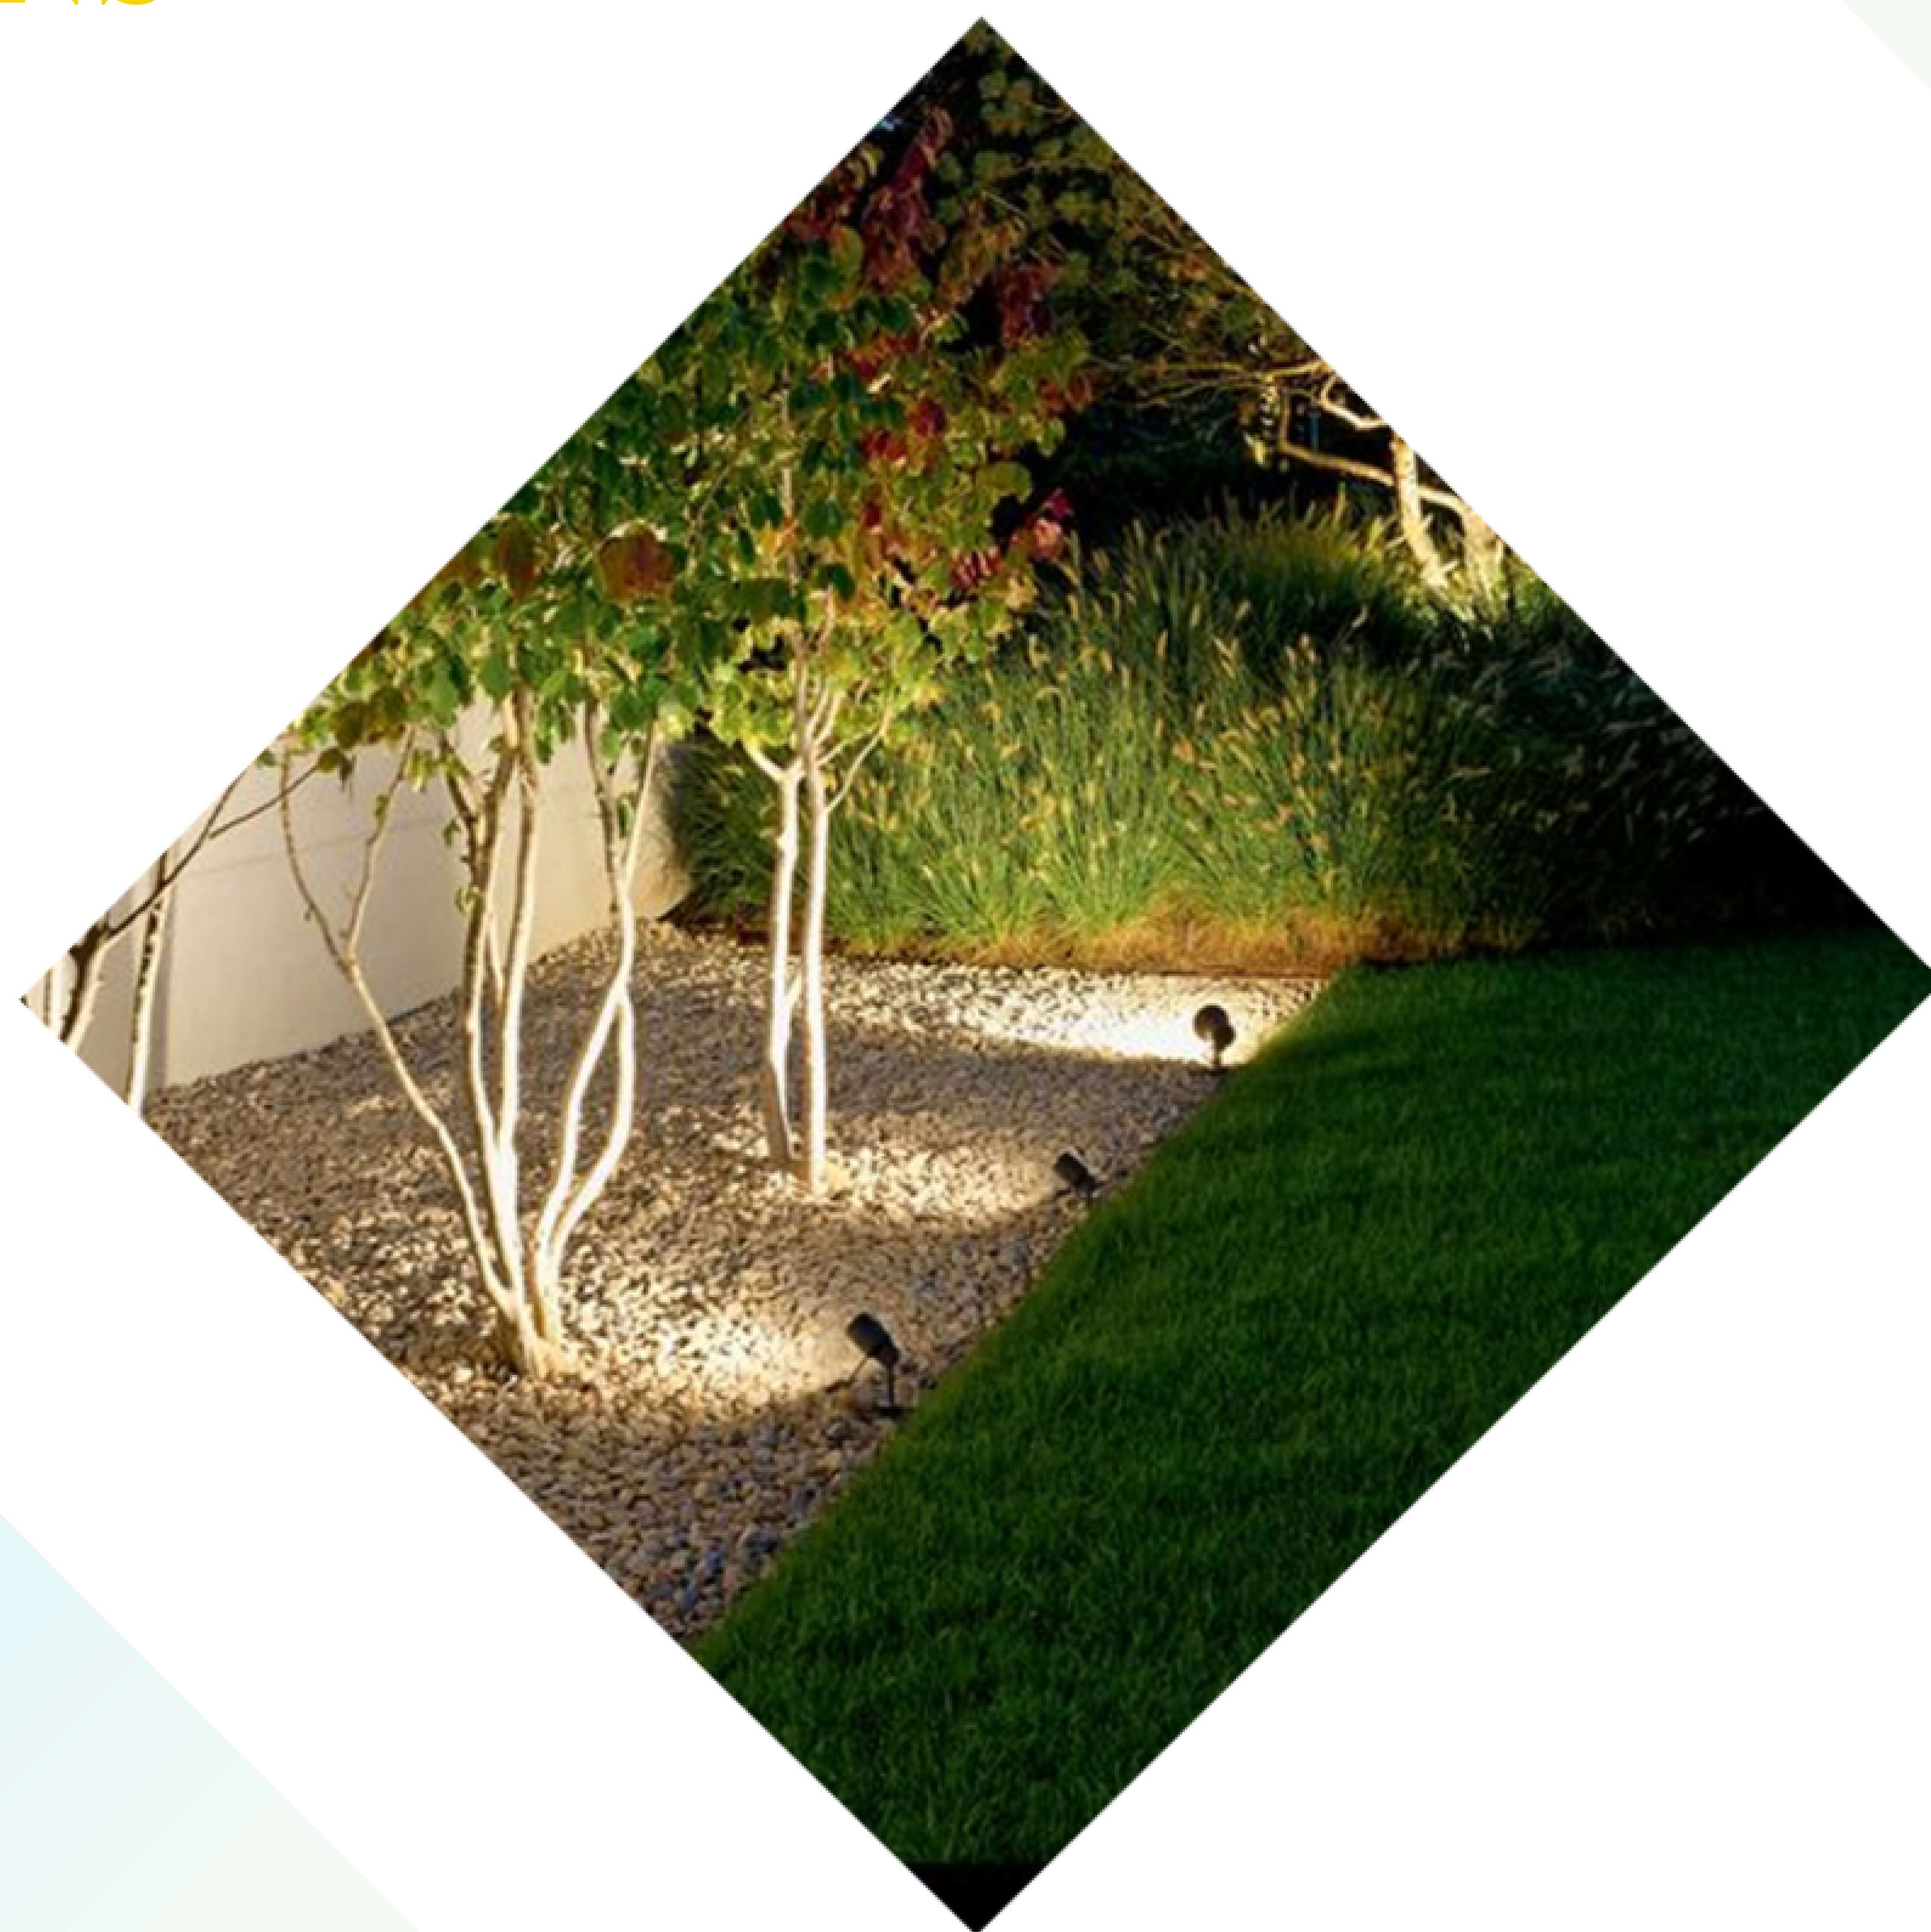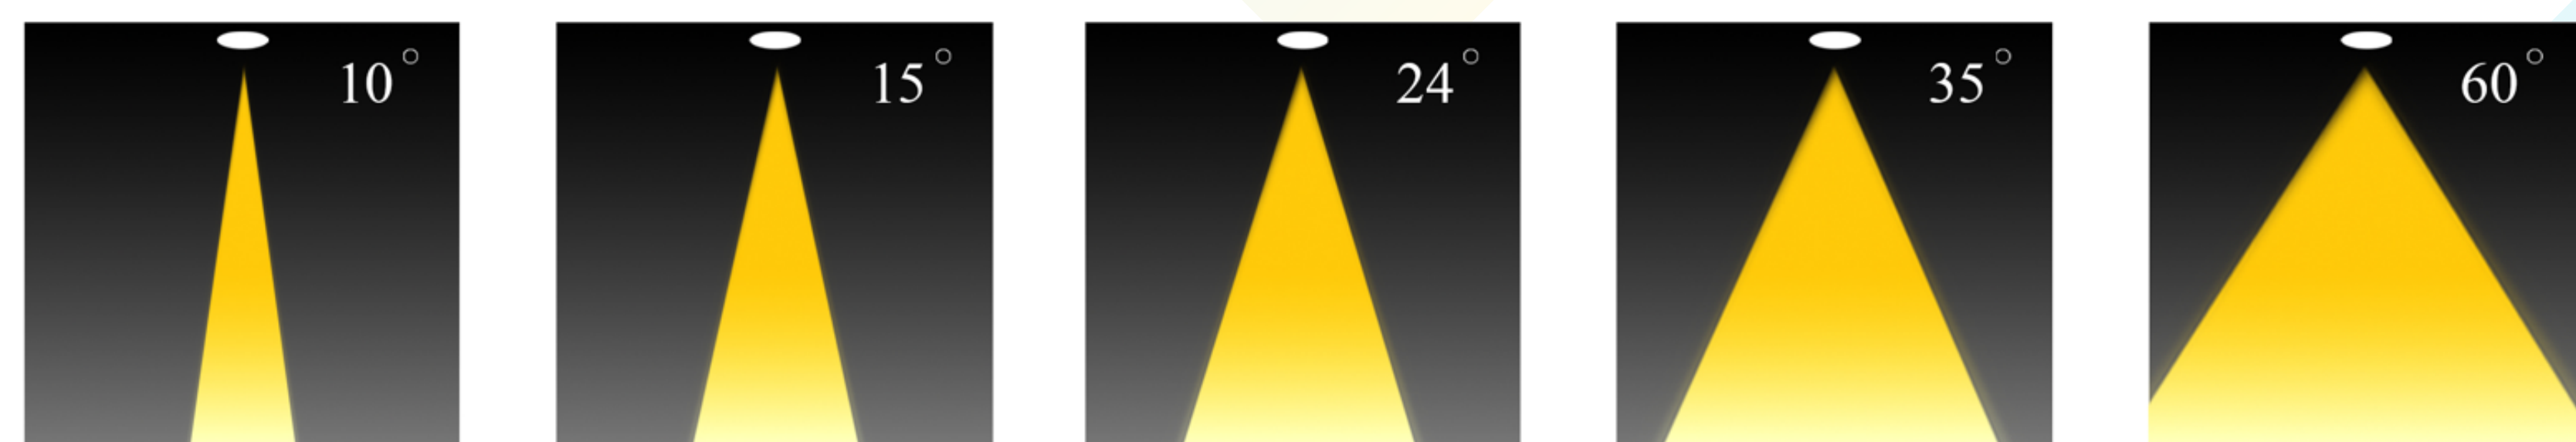

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions ∅ xLxH mm	Driver	LED Chip	Weight
S104230XXXXOTXXX-XX	10 14	90	3000	100x205x390 mm	Tridonic	Osram	

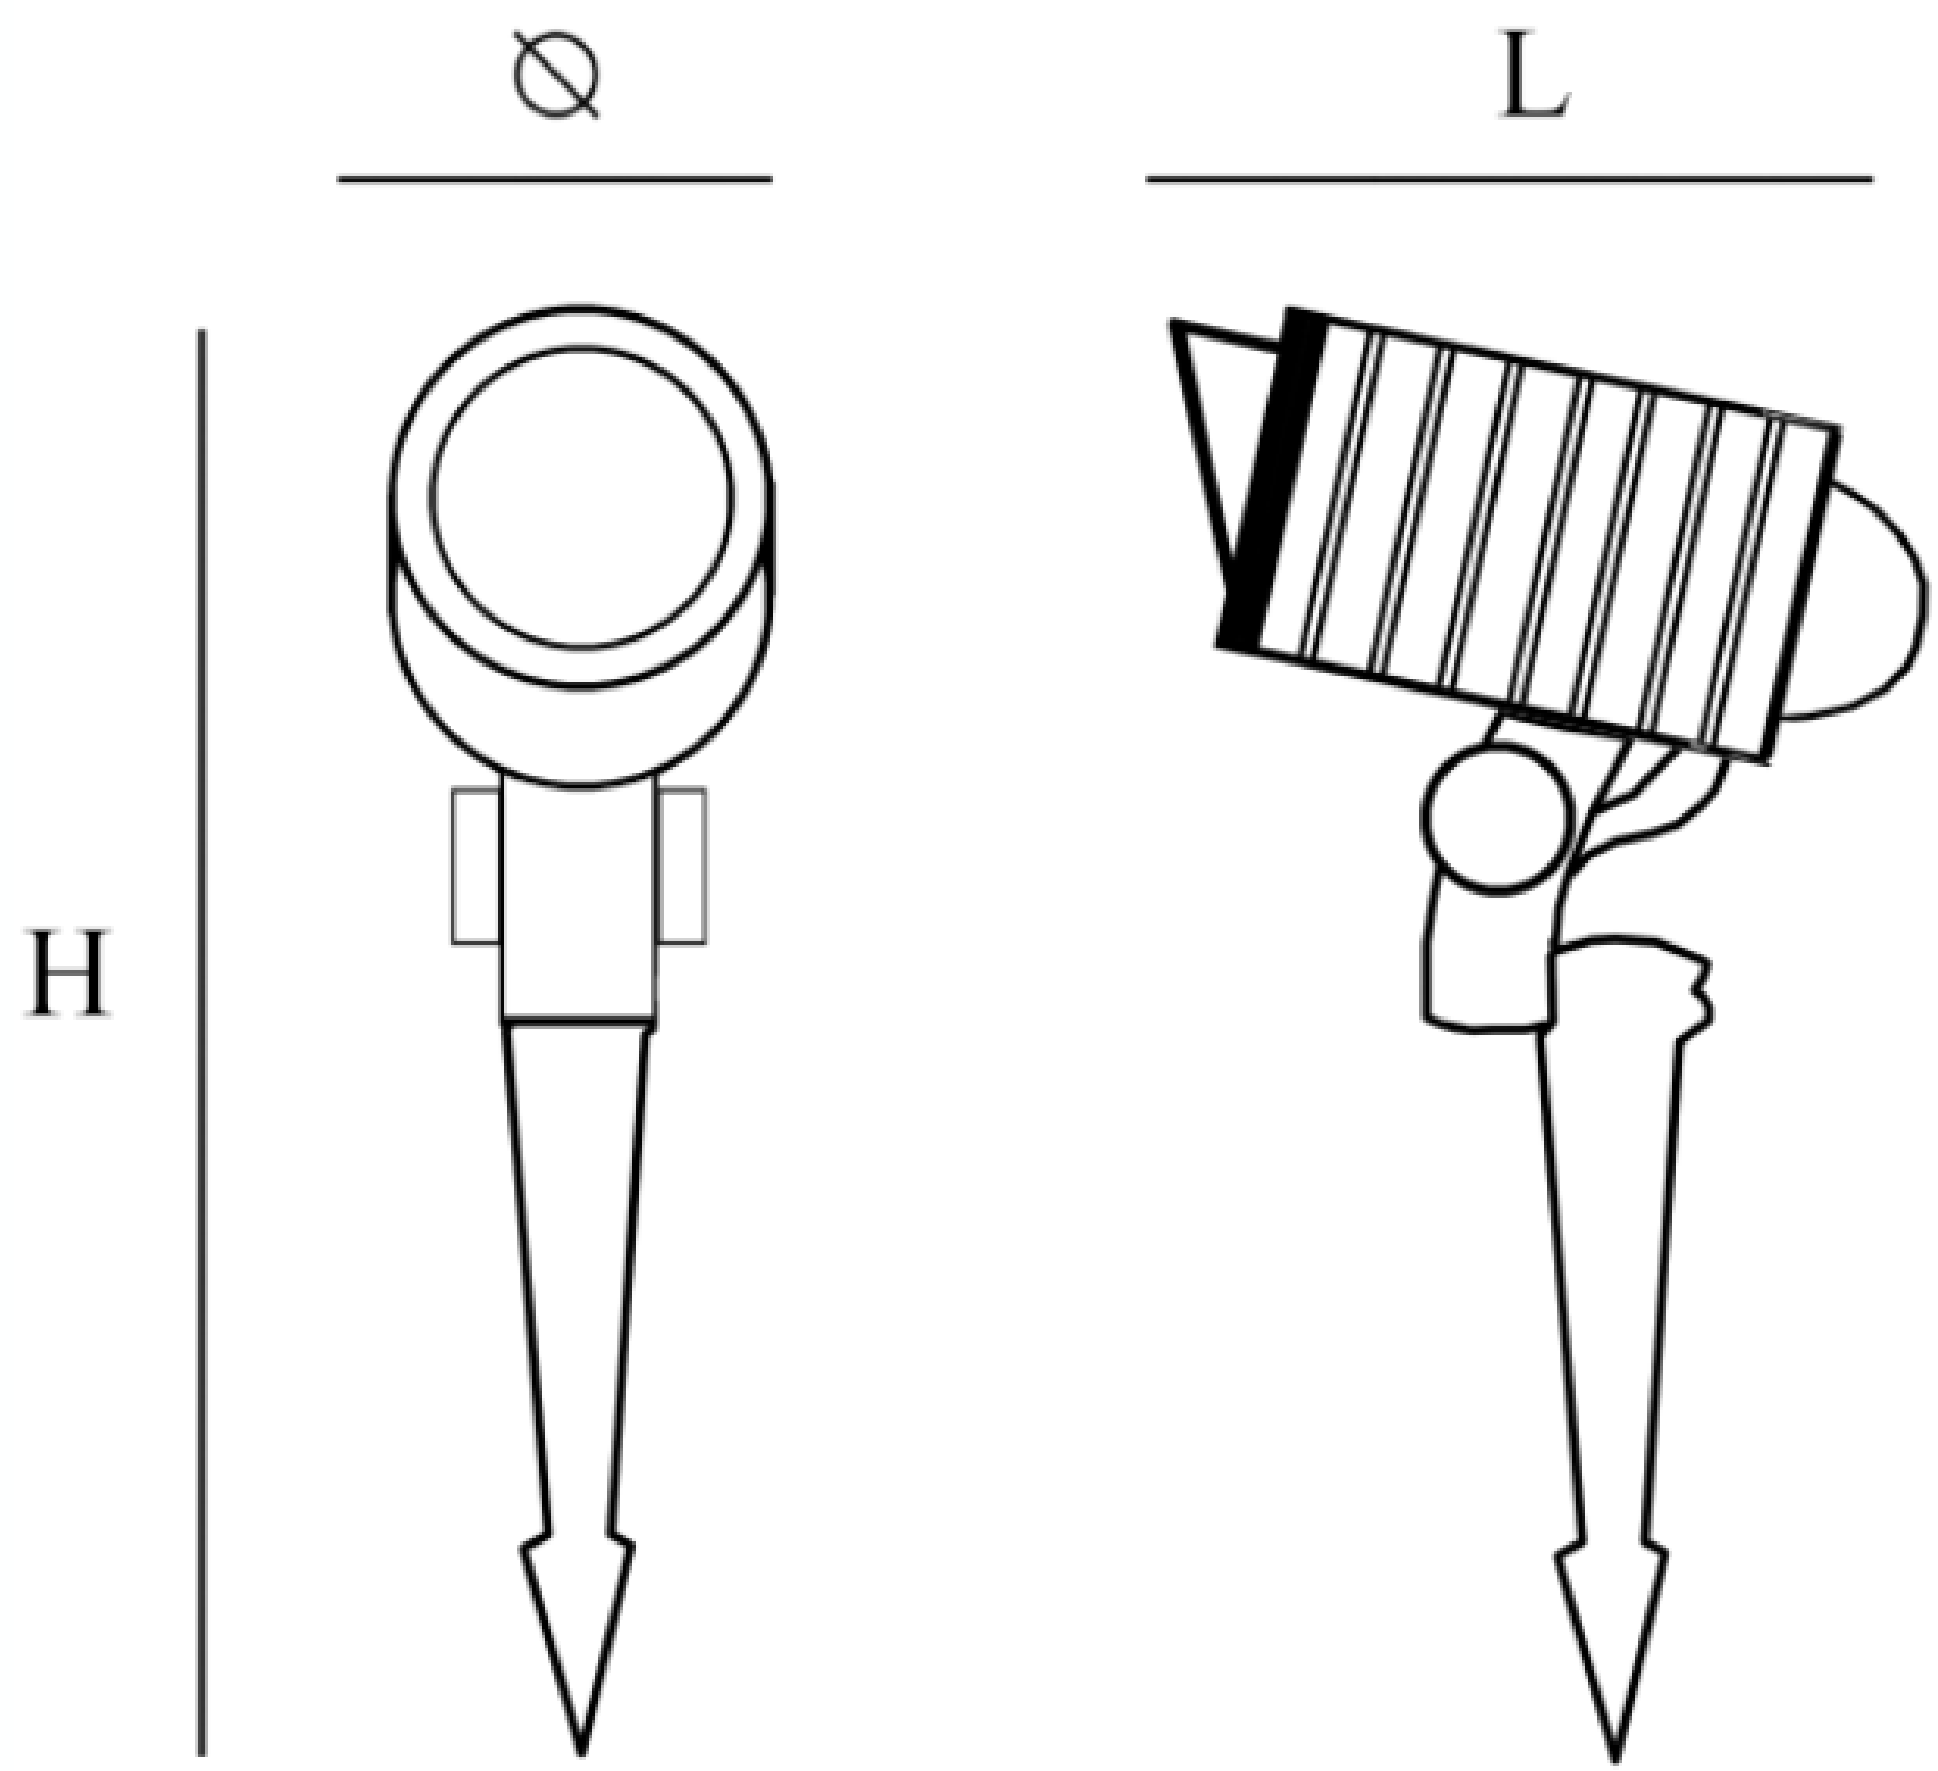

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

