

Track light

SLT-TR02



PERFORMANCE DATA

Efficacy : 90-120 Lm/W

Input Voltage : 220 - 240V

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Optic : 25°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die cast Aluminum

Mounting : On track


Lens : Glass

Finish : Black


Protection Class : IP 44

Mechanical resistance : IK 07

OPTICS

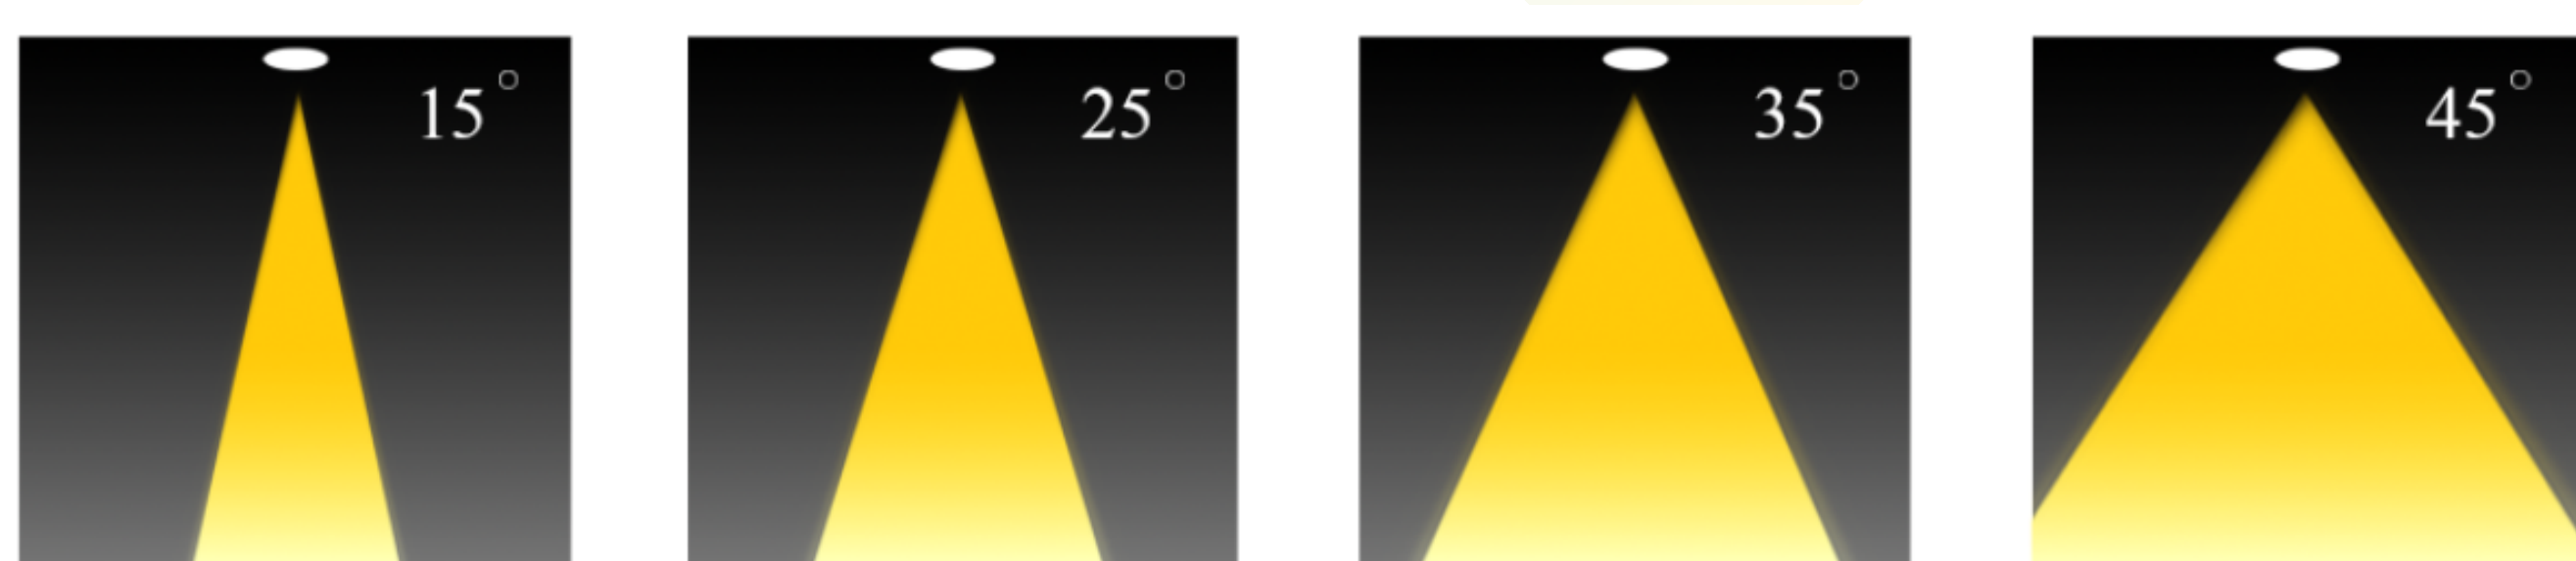

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxP mm	Driver	LED Chip	Weight
TR022XXXXXXXXCXXXX	8 14 20 24 30	90 120	3000 6500		Tridonic Lifud	Cree	

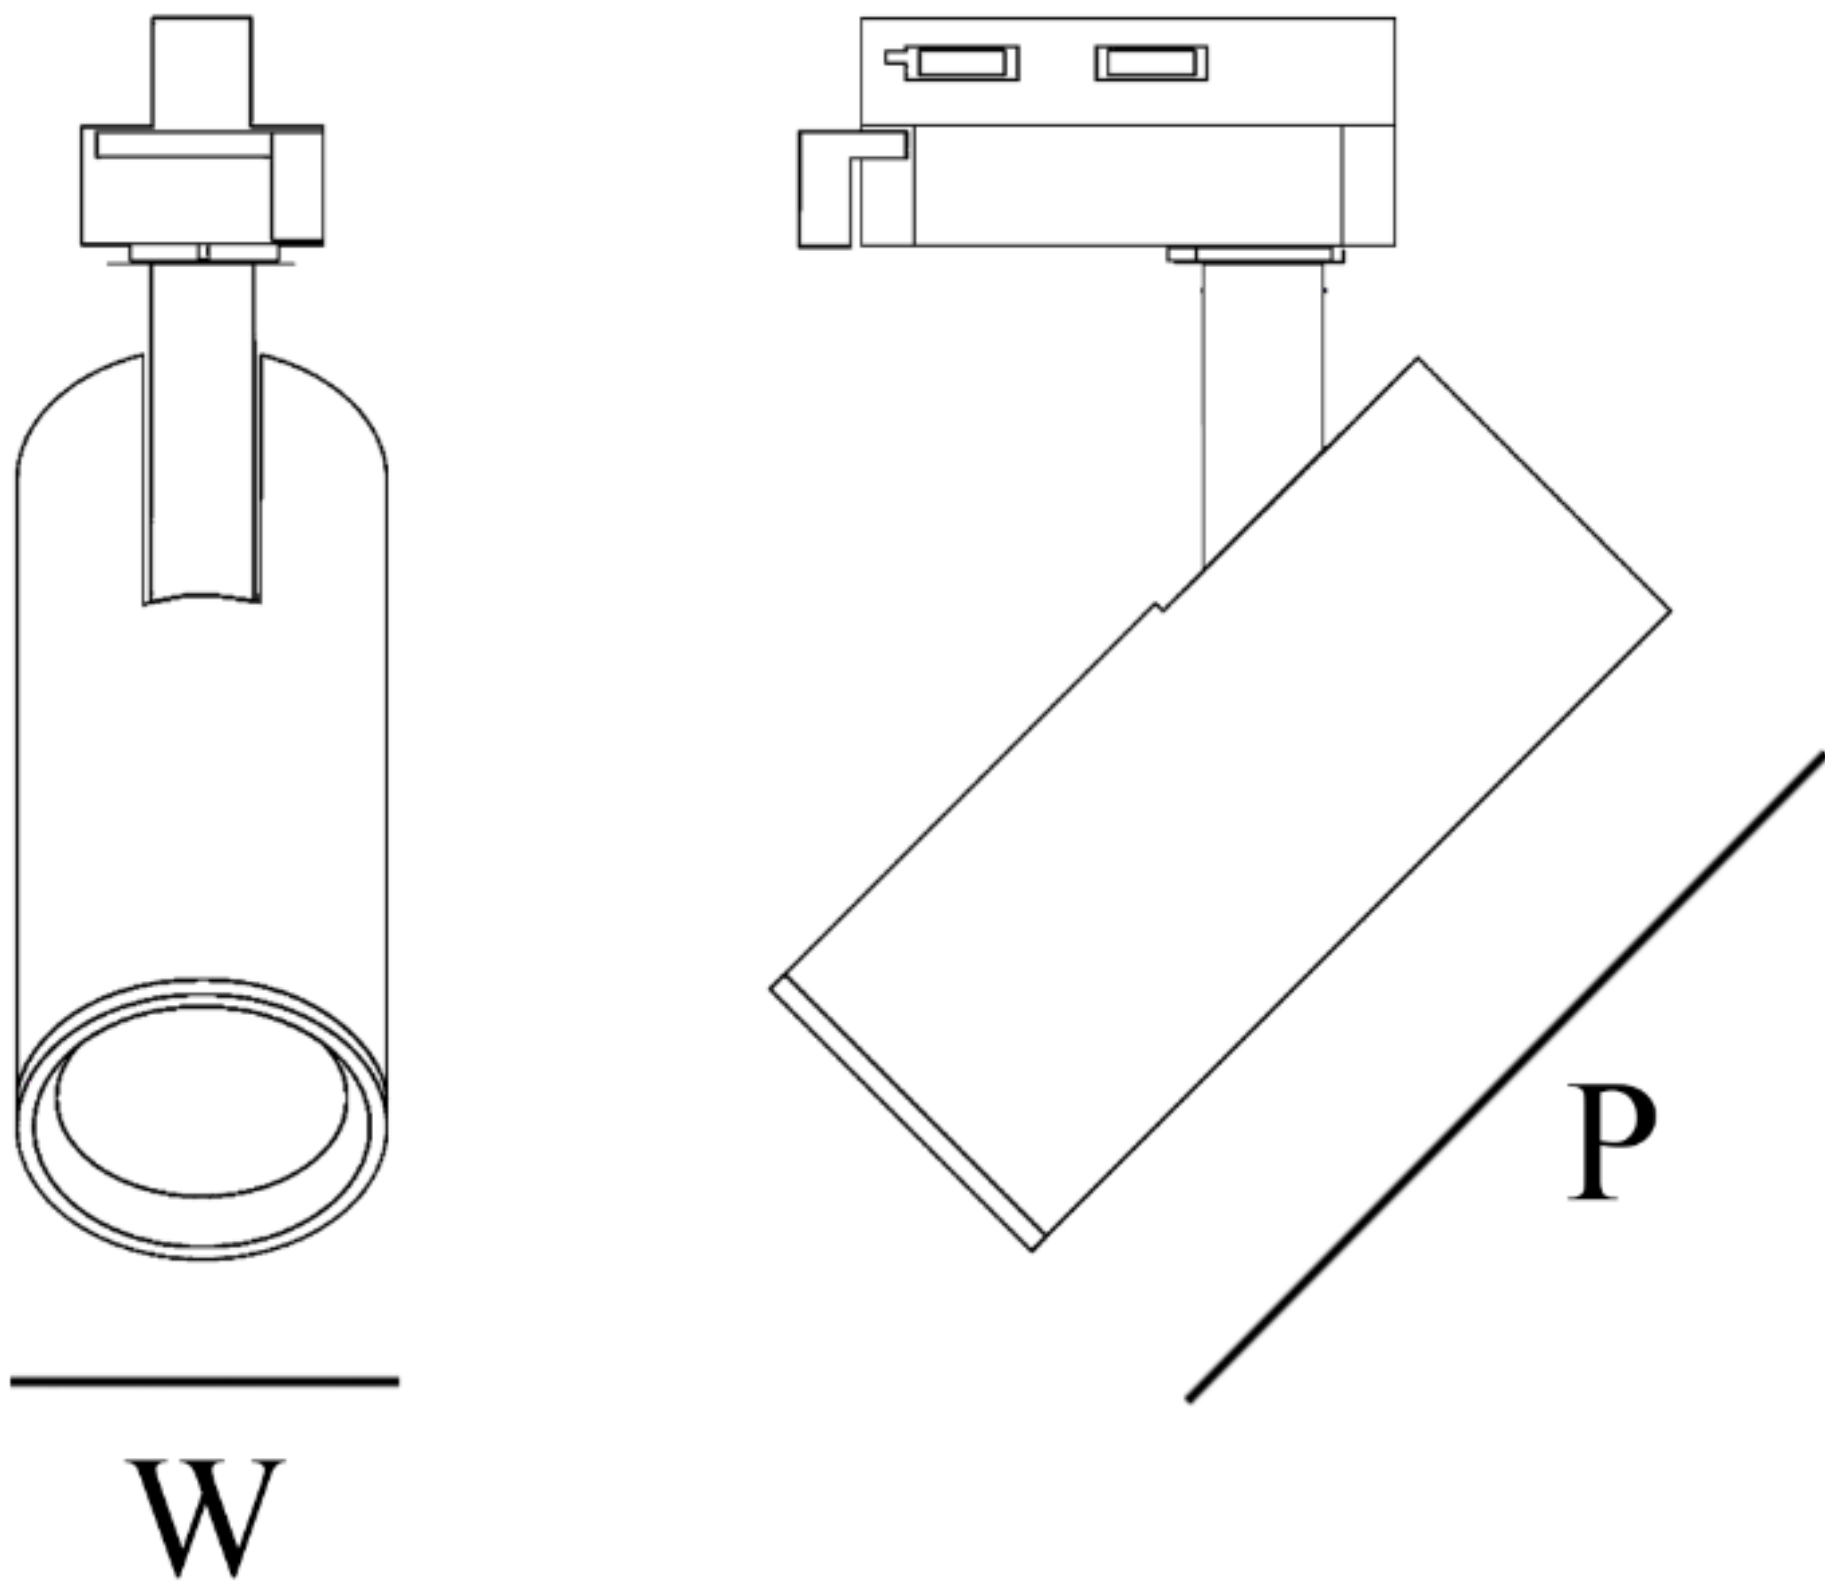

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

POLAR CURVE

