

Underwater

SLT-UN01



PERFORMANCE DATA

Efficacy : 80 Lm/W

Input Voltage : 220VAC

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 36°

Class : III

MECHANICAL SPECIFICATIONS

Mounting : Under Water






Lens : Tempered Glass

Finish : Stainless Steel



Protection Class : IP 68

Mechanical resistance : IK 09

OPTICS

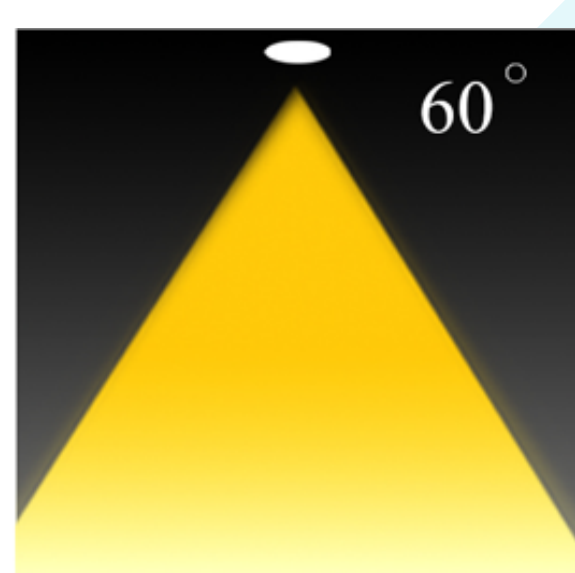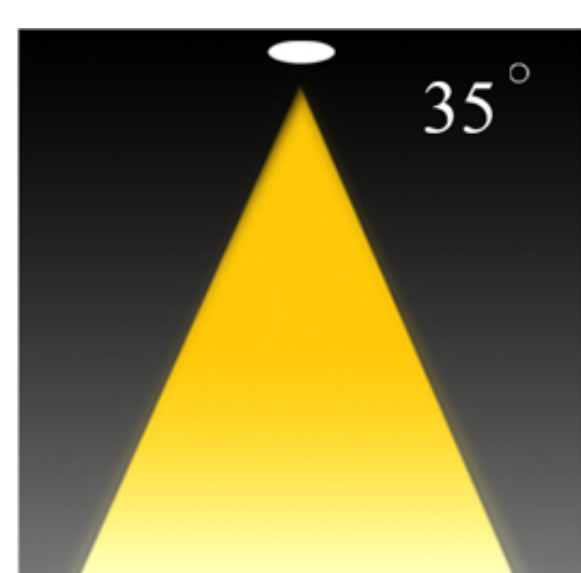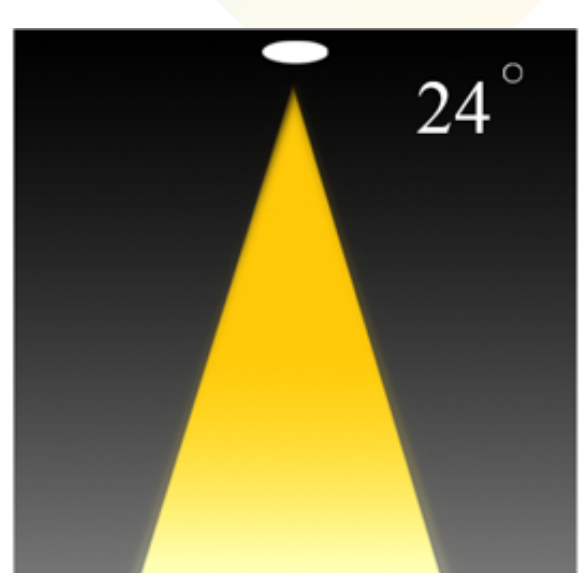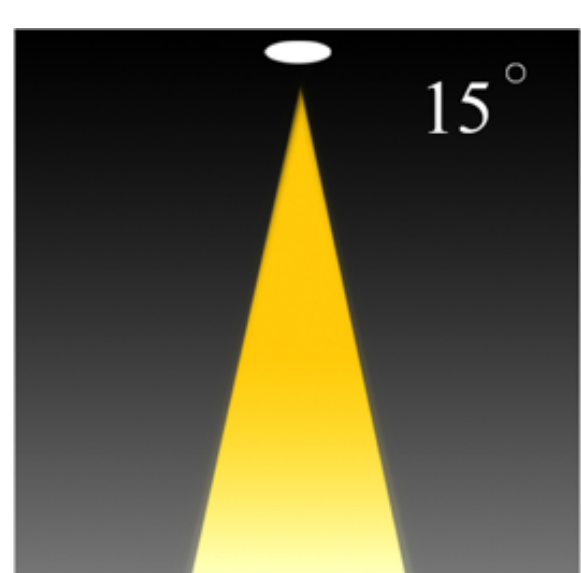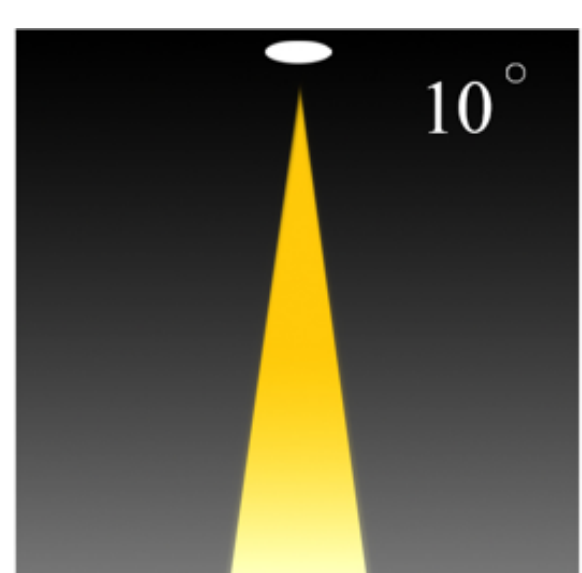

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø x H mm	Driver	LED Chip	Weight
UN130818OM09	9	80	3000 4000	160x76 mm	Remote Driver (Meanwell)	Osram	

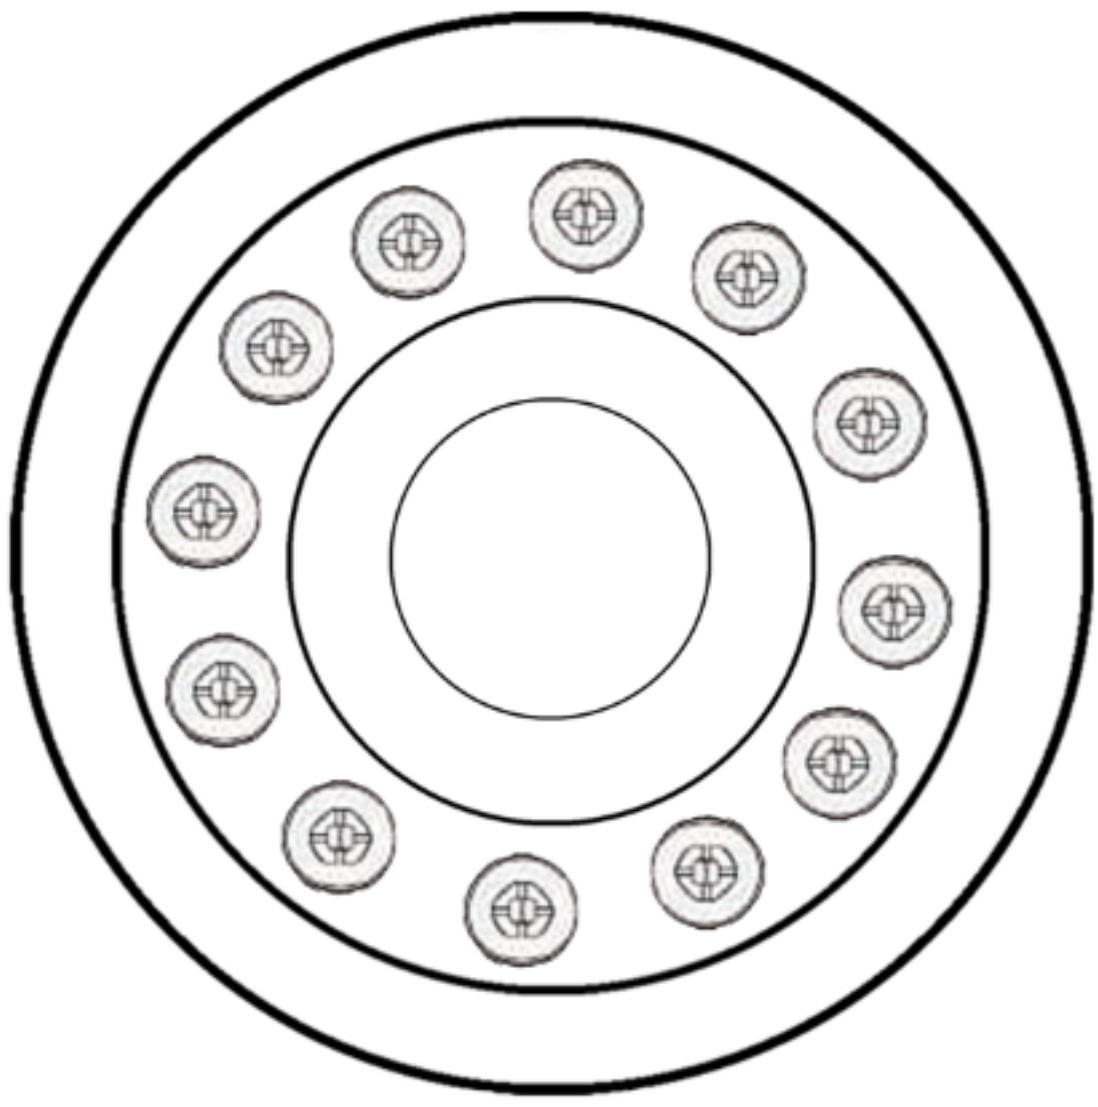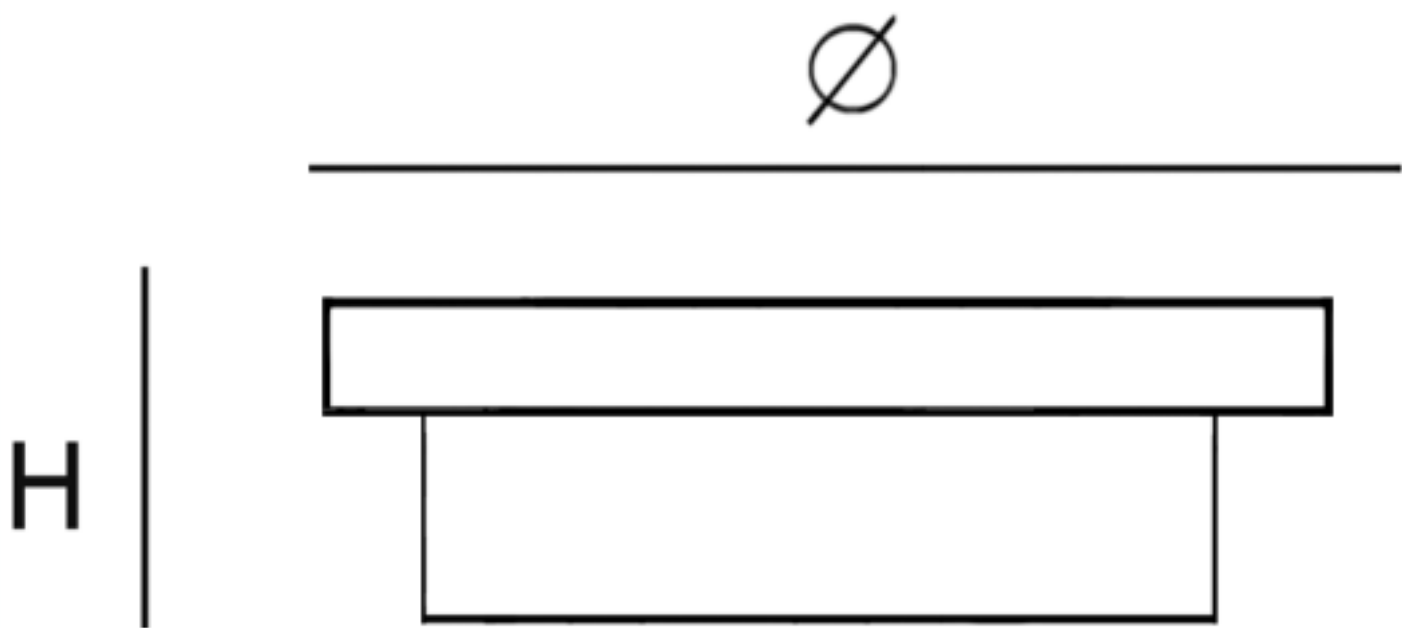

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

POLAR CURVE

