

Underwater

SLT-UN07



PERFORMANCE DATA

Efficacy : 72 Lm/W

Input Voltage : 24V DC

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 5000K

Life Time : 50.000 hrs

Optic : 30°

Class : III

MECHANICAL SPECIFICATIONS

Material : Stainless Steel

Mounting : Surface Under Water


Lens : Tampered Glass 8 mm Thickness

Finish : Stainless Steel


Protection Class : IP 68

Mechanical Resistance : IK 09

OPTICS

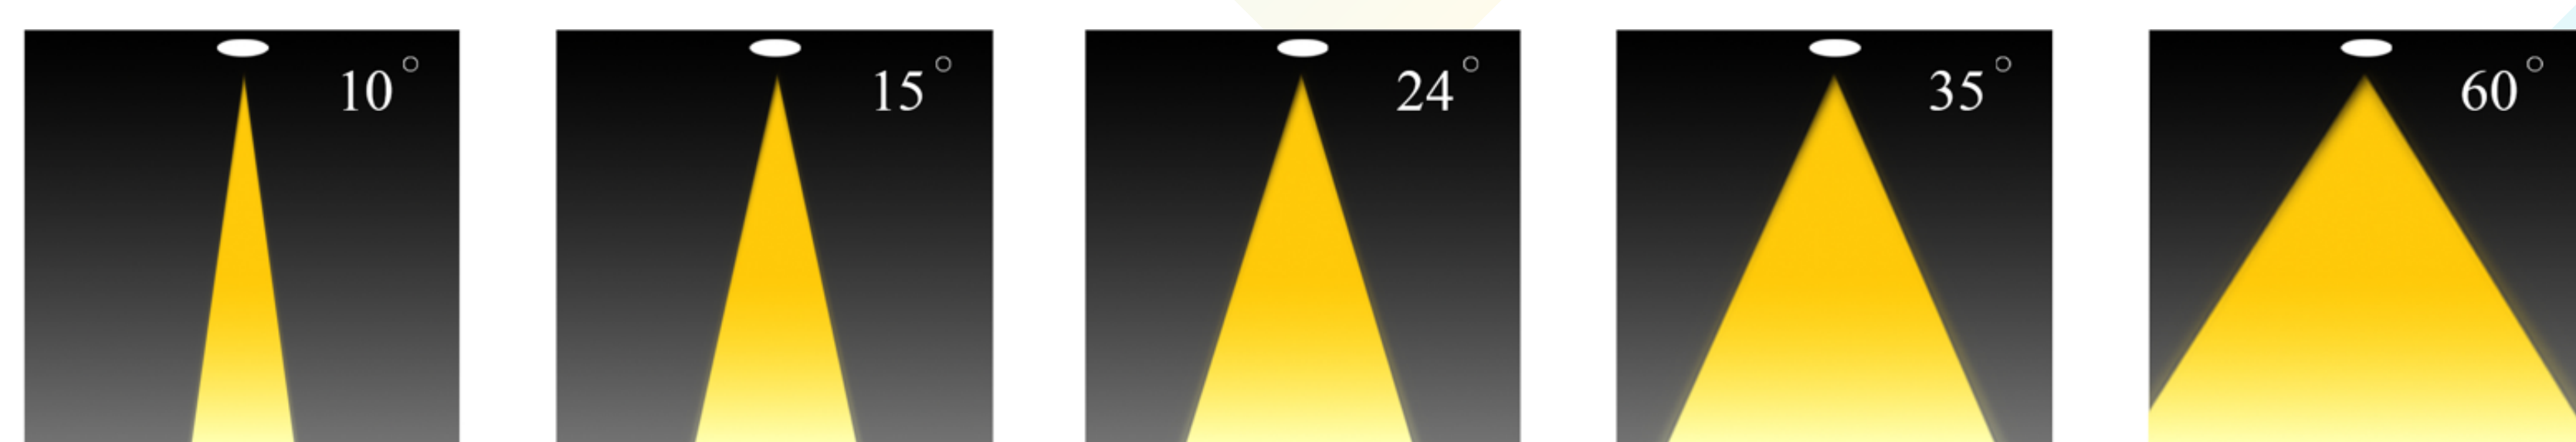

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø x H mm	Driver	LED Chip	Weight Kg
UN073508030CX180	180	72	5000 5500	280x210 mm	Remote Driver (Meanwell)	Cree	4

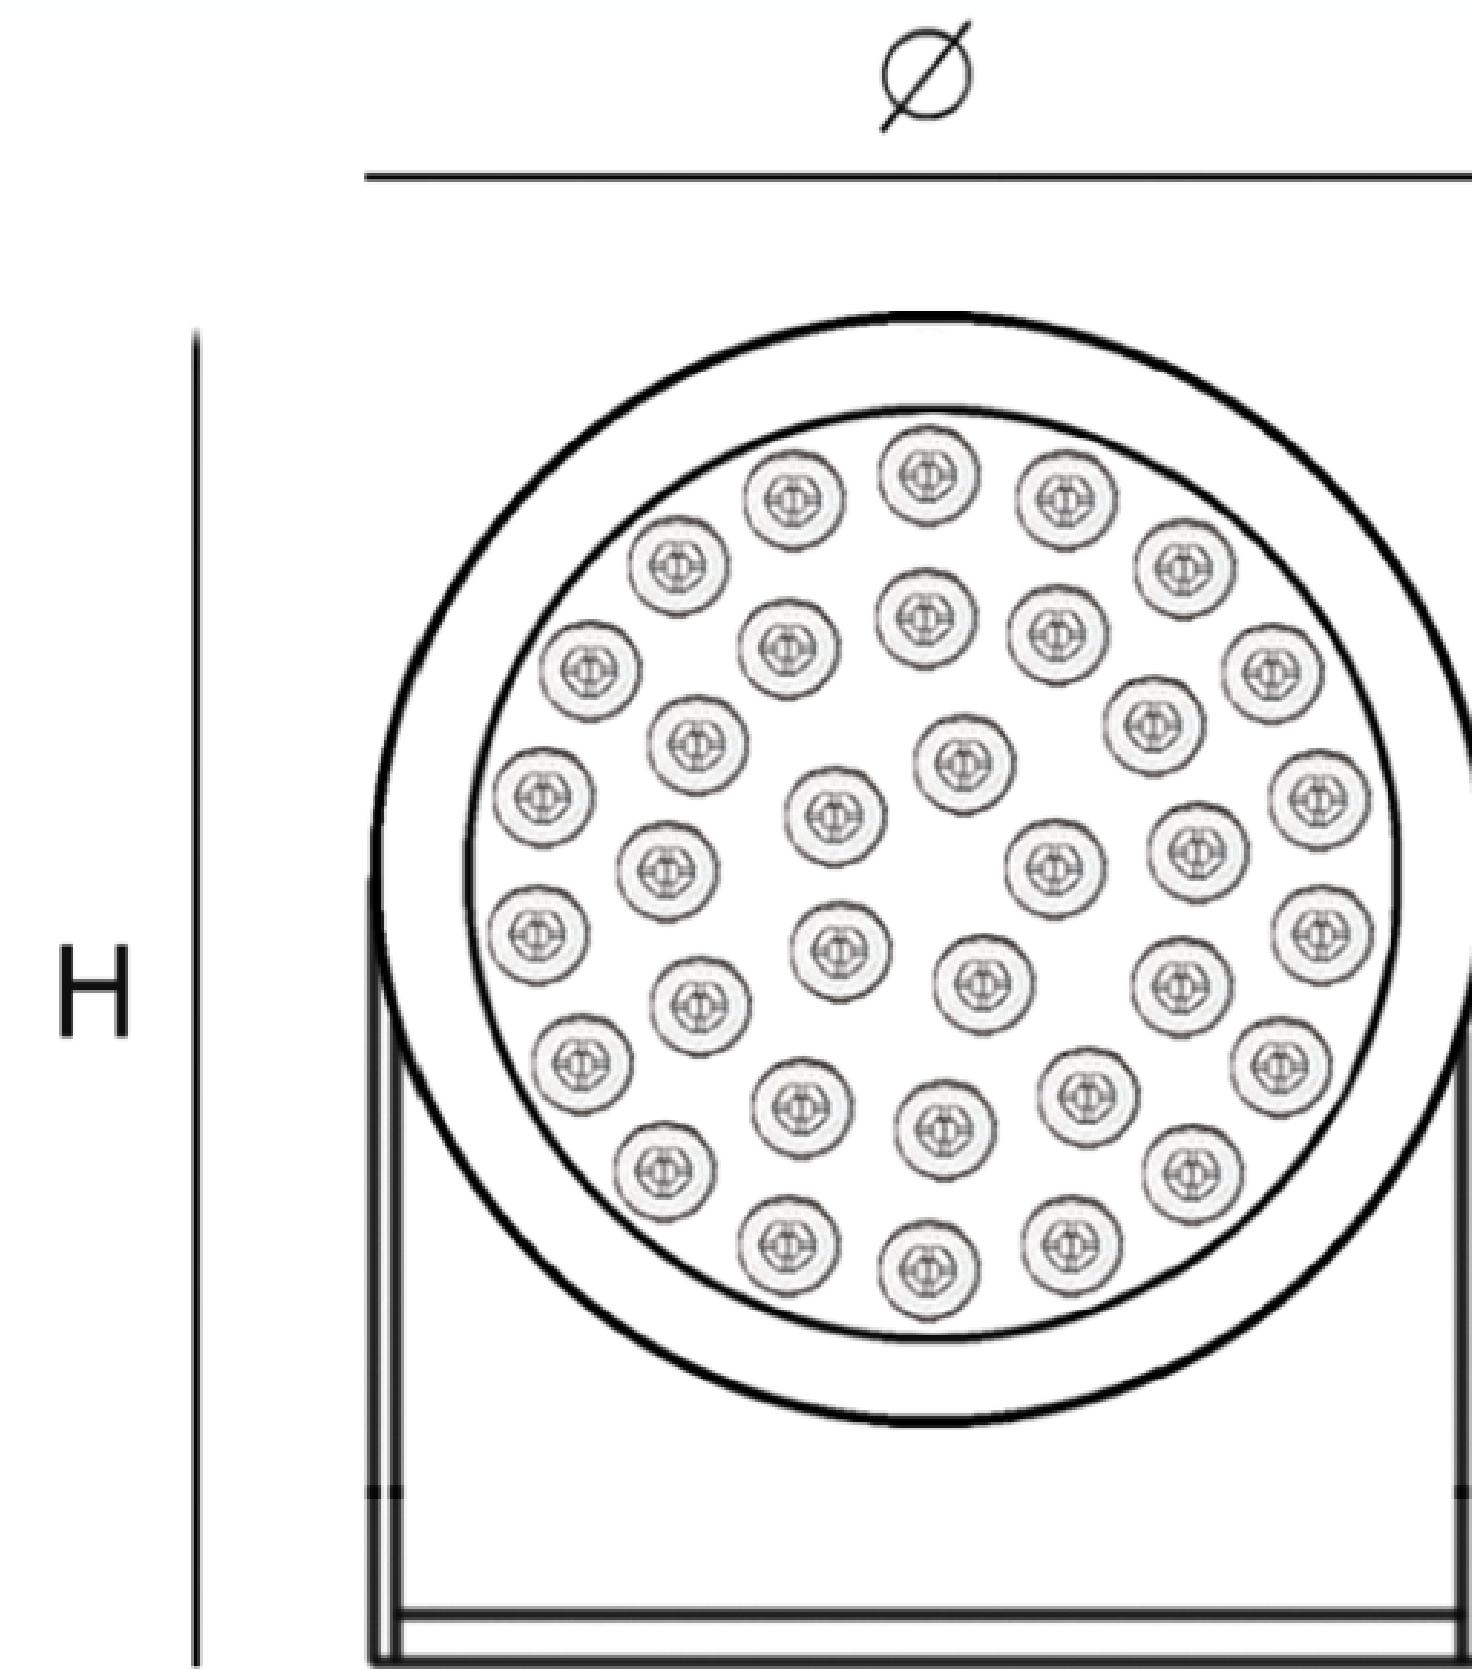

CUSTOMISZE OPTIONS

POLAR CURVE

3K	4K	6.5K	CRI >80	DALI
Light Temperature 3000K	Light Temperature 4000K	Light Temperature 6500K	Color Rendering Index >80	

