

Underwater

SLT-UN09



PERFORMANCE DATA

Efficacy : 46.6 Lm/W

Input Voltage : 12-24V AC/DC

Frequency : 50-60Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50.000 hrs

Optic : 30°

Class : III

MECHANICAL SPECIFICATIONS

Material : Stainless Steel

Mounting : Surface Under Water






Lens : Tampered Glass 8 mm Thickness

Finish : Stainless Steel


Protection Class : IP 68

Mechanical Resistance : IK 09

OPTICS

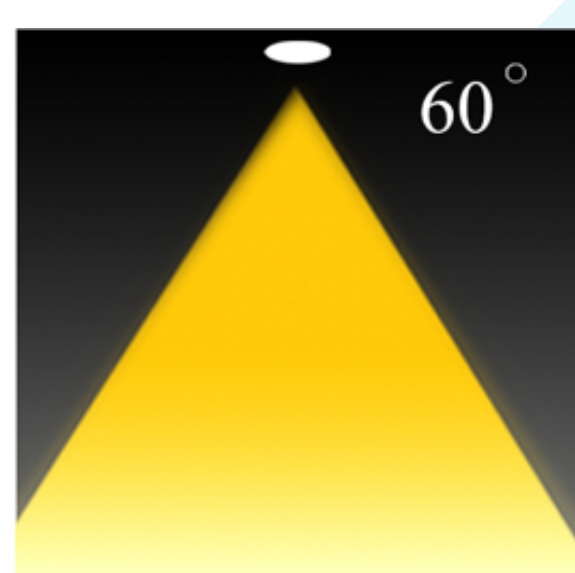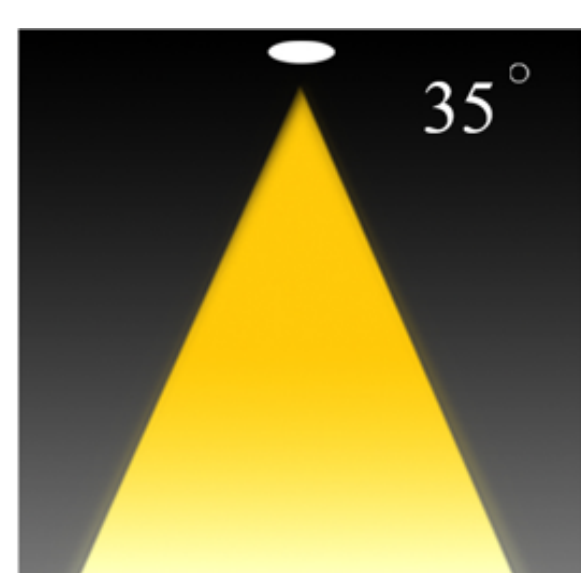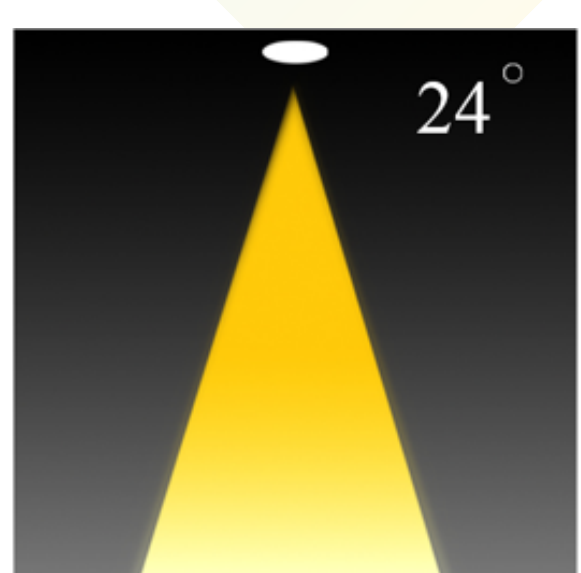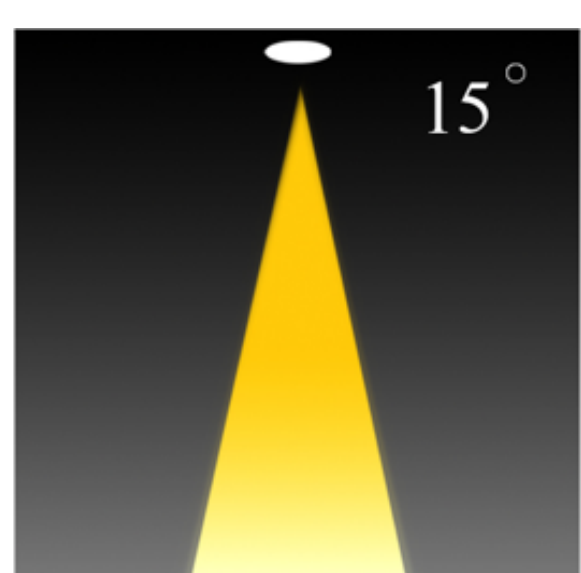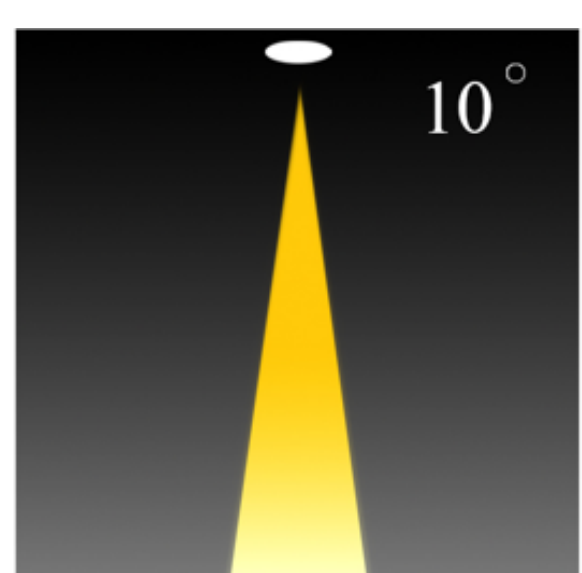

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø x H mm	Driver	LED Chip	Weight Kg
UN093278030CX045	45	46.6	2700 3000	175x181 mm	Remote Driver (Meanwell)	Cree	4

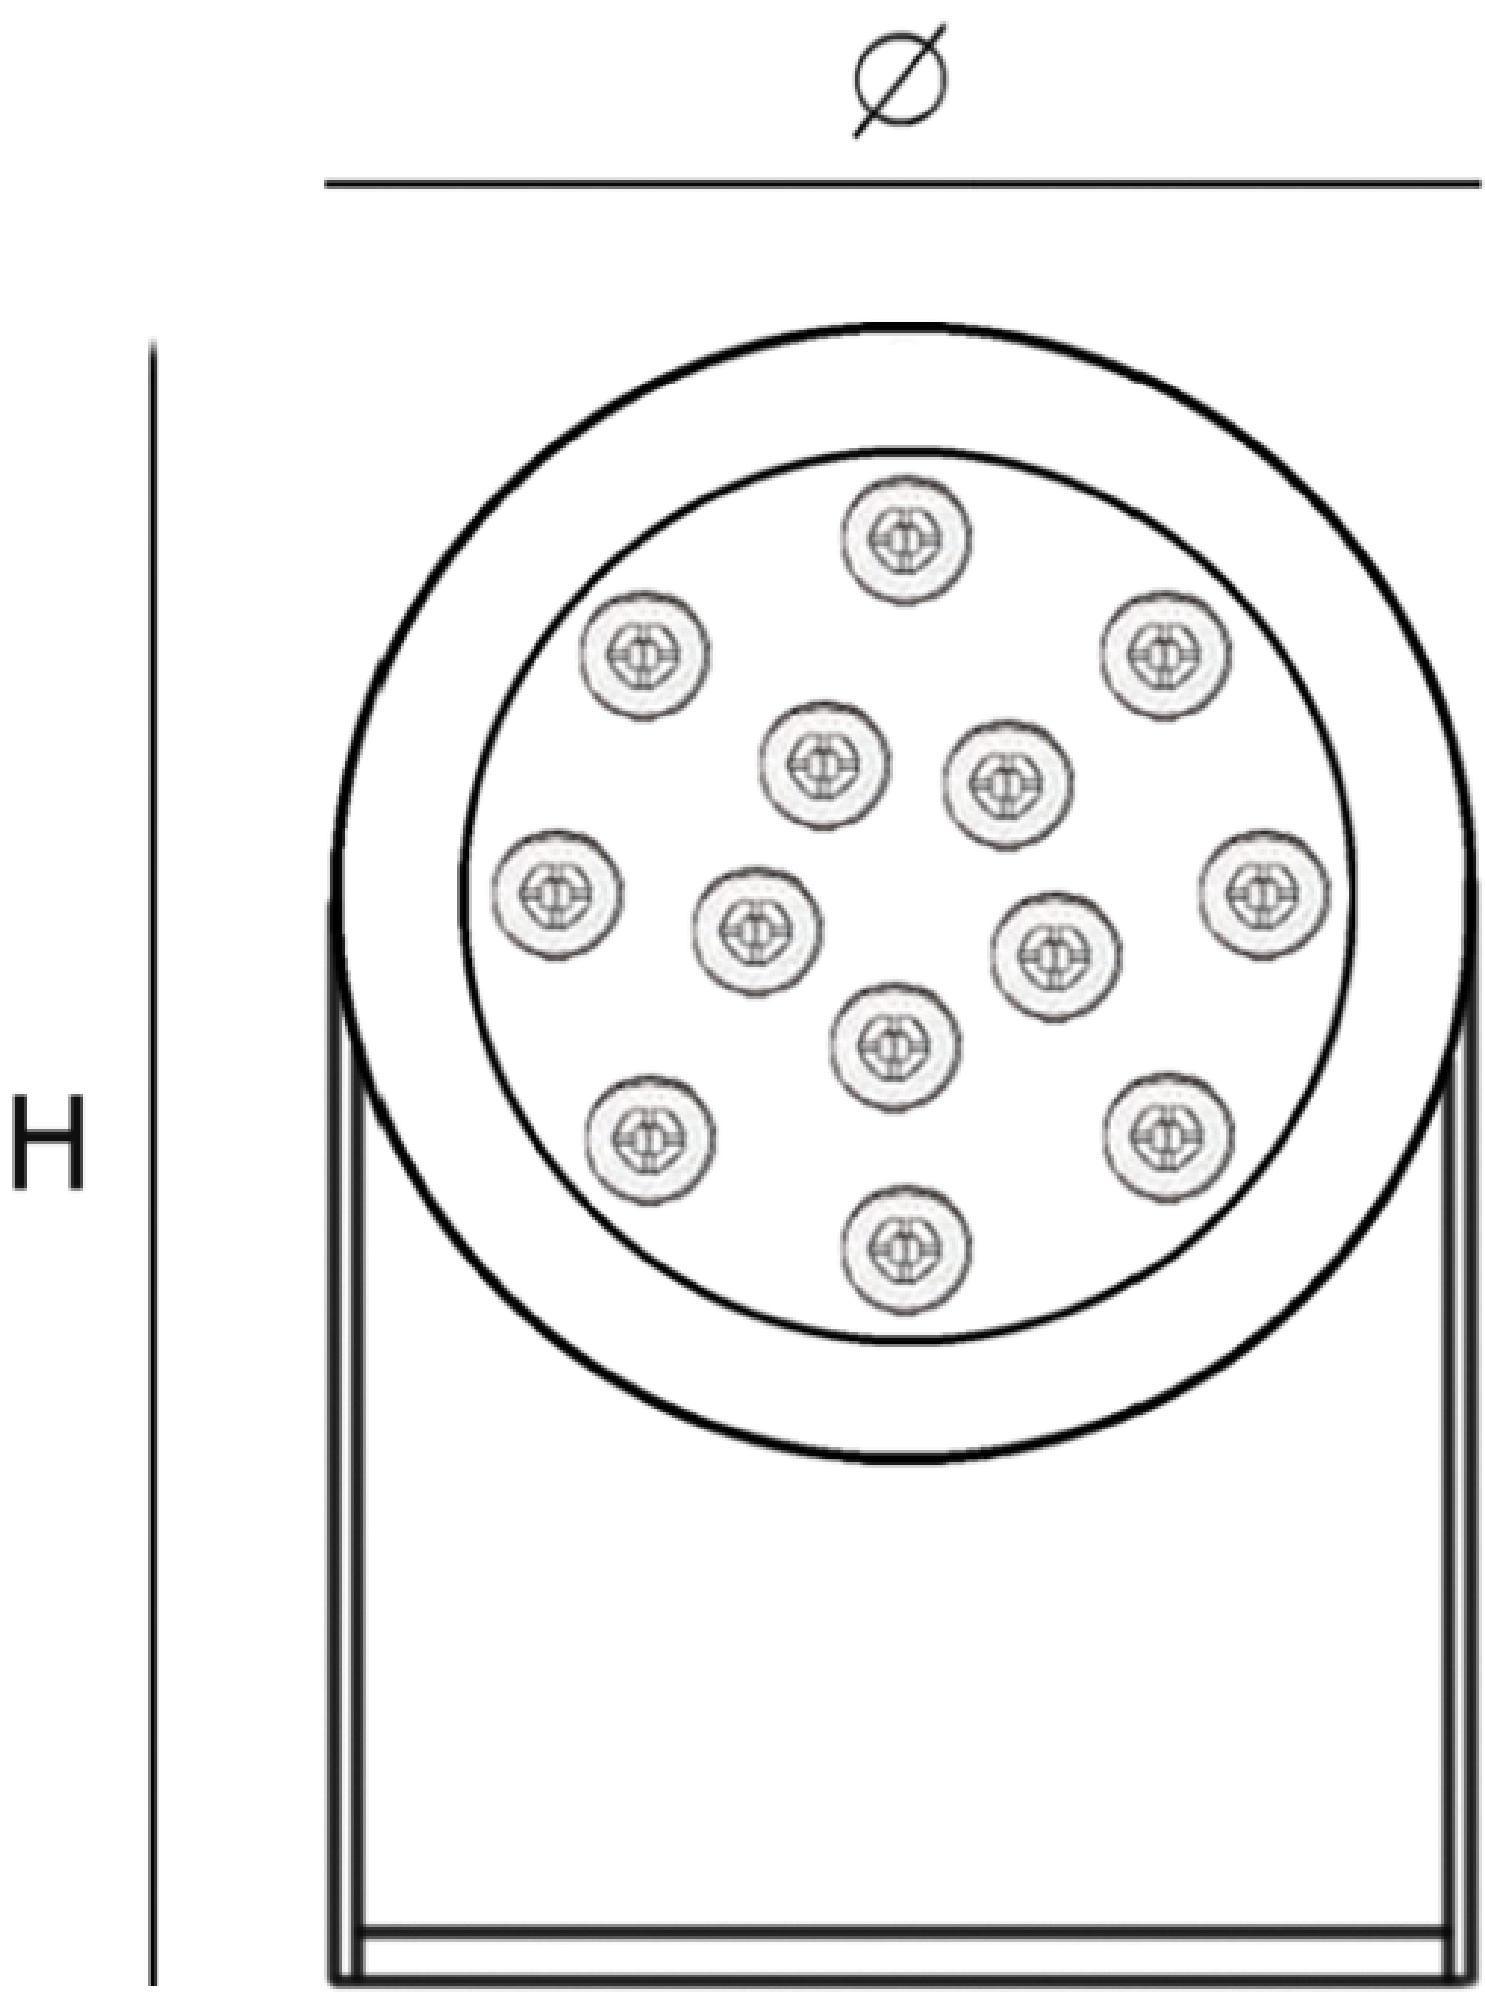

CUSTOMISZE OPTIONS

3K

Light Temperature 3000K

4K

Light Temperature 4000K

6.5K

Light Temperature 6500K

CRI >80

Color Rendering Index >80

DALI

POLAR CURVE

