

# Underwater

SLT-UN10



## PERFORMANCE DATA

**Efficacy :** 46.6 Lm/W

**Input Voltage :** 24V AC/DC

**Frequency :** 50-60Hz

**Color Rendering :** CRI 80

**Color Temperature :** RGB

**Life Time :** 50.000 hrs

**Optic :** 30°

**Class :** III

## MECHANICAL SPECIFICATIONS

**Material :** Stainless Steel

**Mounting :** Surface Under Water


**Lens :** Tampered Glass 8 mm Thickness

**Finish :** Stainless Steel

**Protection Class :** IP 68

**Mechanical Resistance :** IK 09

## OPTICS

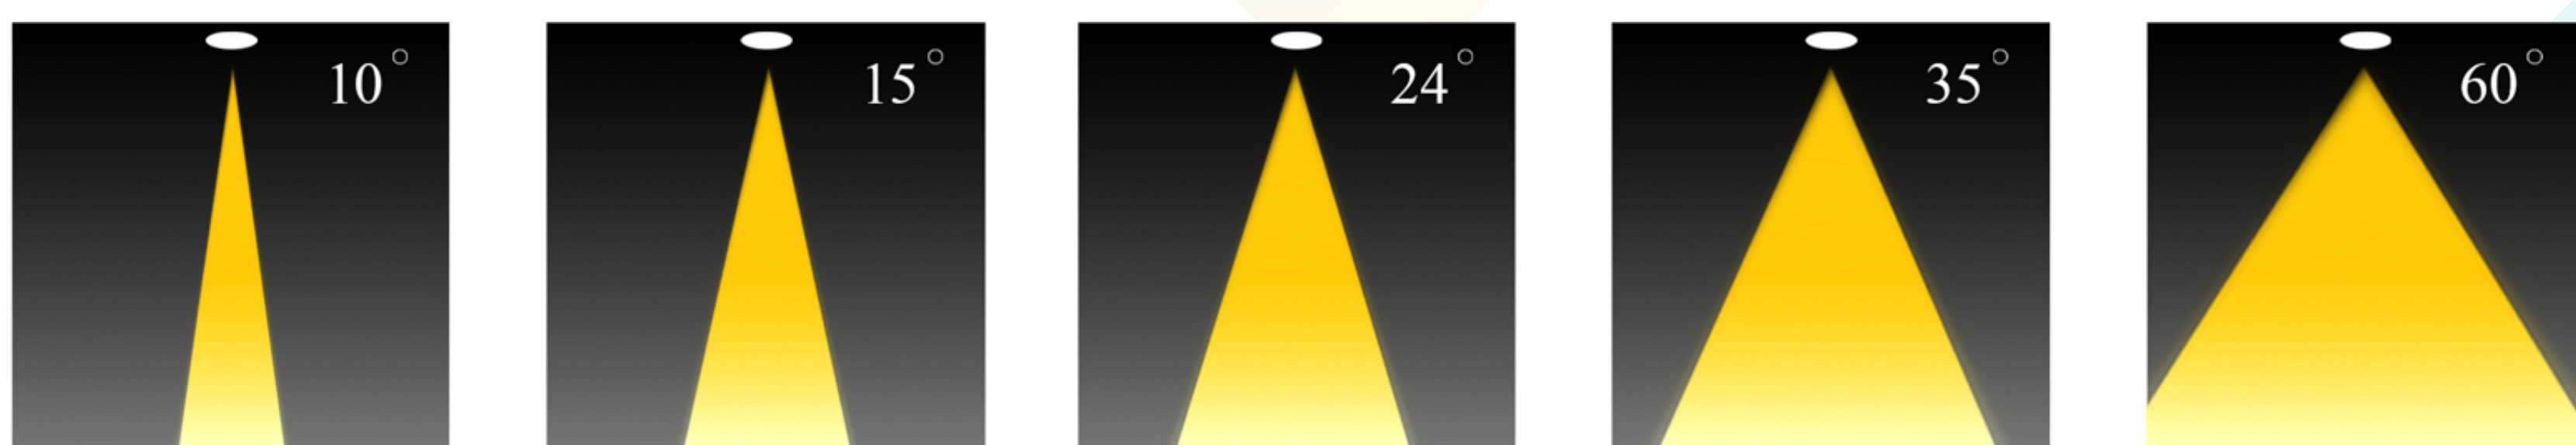

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions Ø x H mm	Driver	LED Chip	Weight Kg
UN10RGB378030CX045	45	46.6	RGB With DMX	175x181 mm	Remote Driver (Meanwell) + DMX Controller	Cree	4




DMX Controller



Build-in DMX decoder



Fixture

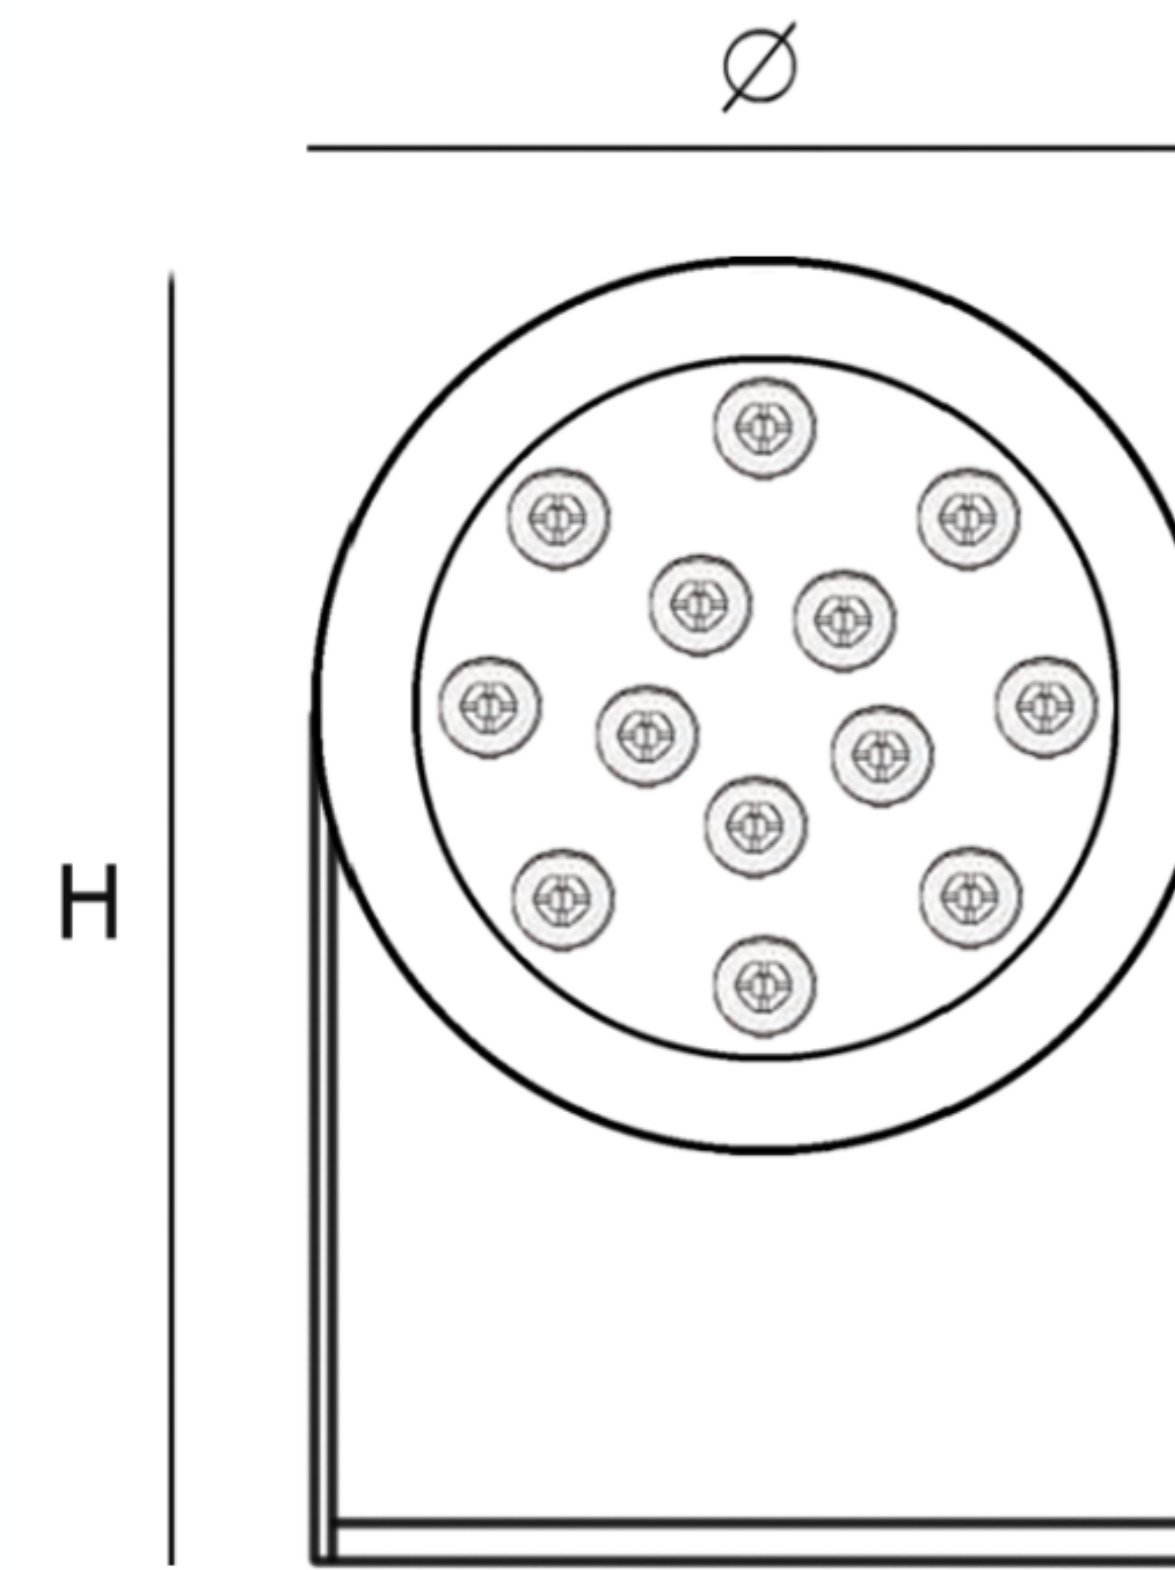

## CUSTOMISZE OPTIONS

3K

Light Temperature  
3000K

4K

Light Temperature  
4000K

6.5K

Light Temperature  
6500K

CRI  
>80

Color Rendering Index >80

DALI

## POLAR CURVE

