

Up & Down

UD-E27



PERFORMANCE DATA

Efficacy : 90 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 15,000- 25,000 hrs

Optic : 120°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum and extruded Aluminum body

Mounting : Wall light, up and down version



Lens : Clear Glass

Finish : Gray RAL 7016


Protection Class : IP 65

Mechanical resistance : IK 08

OPTICS

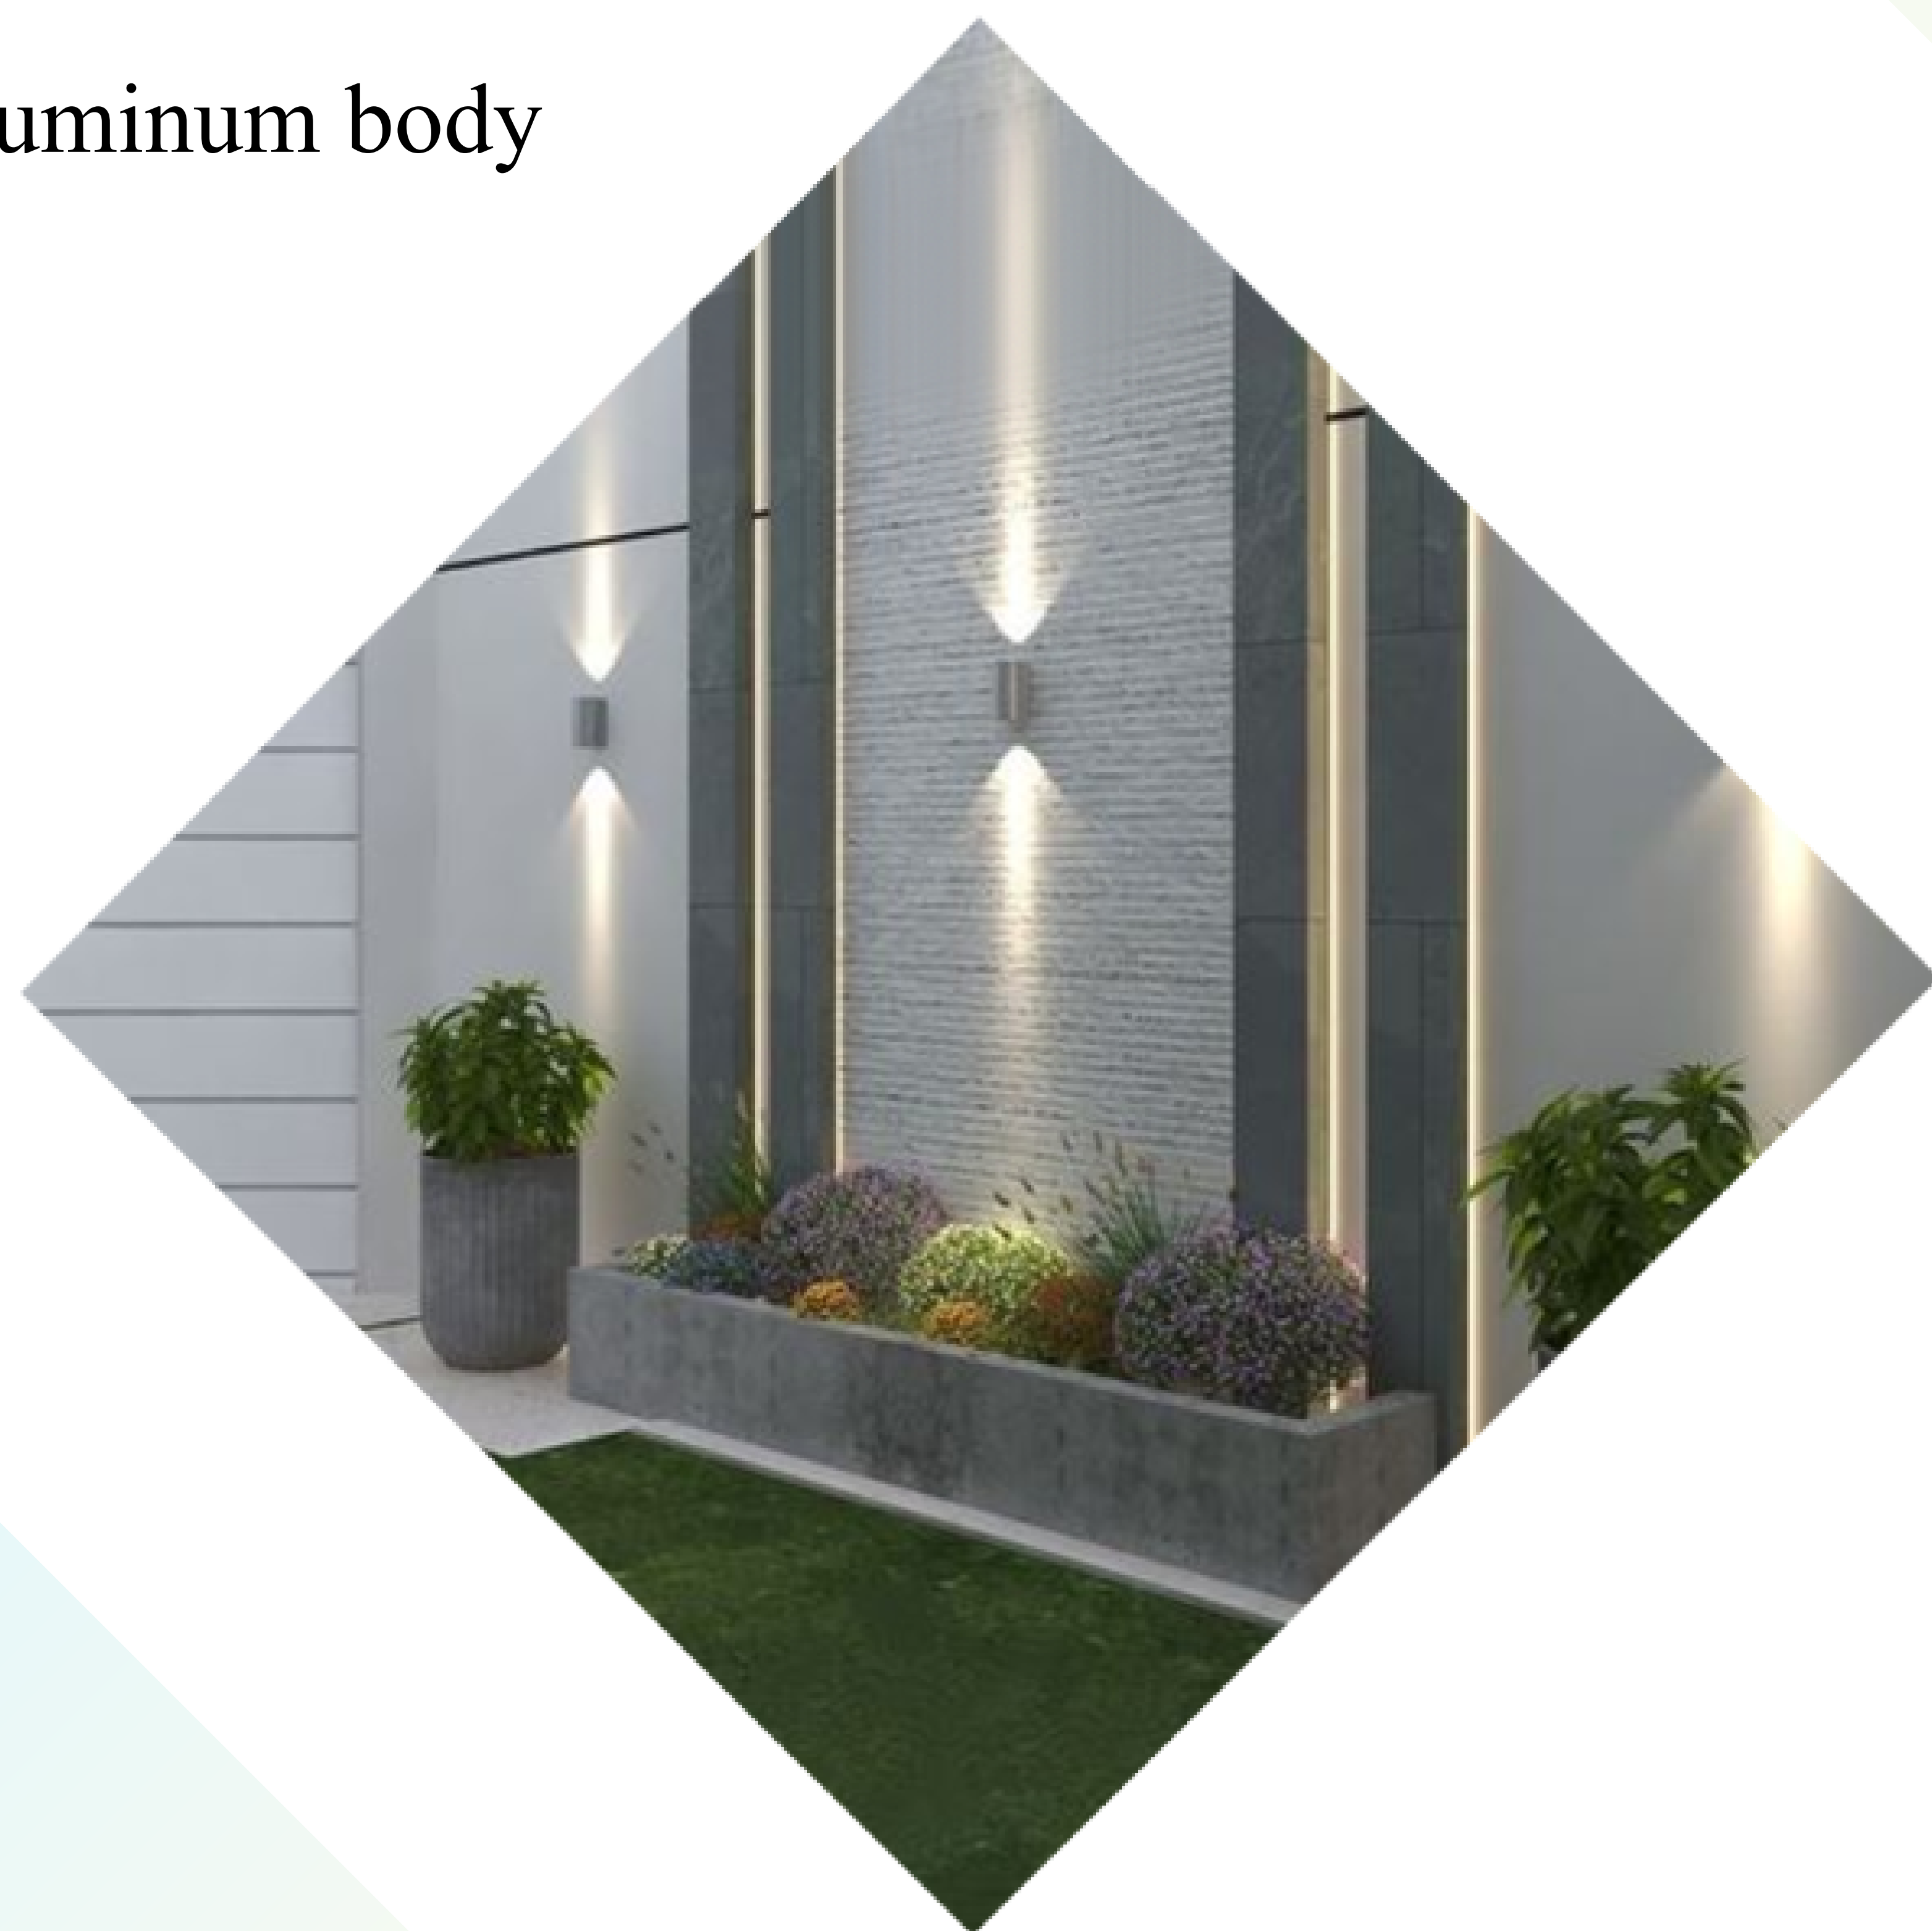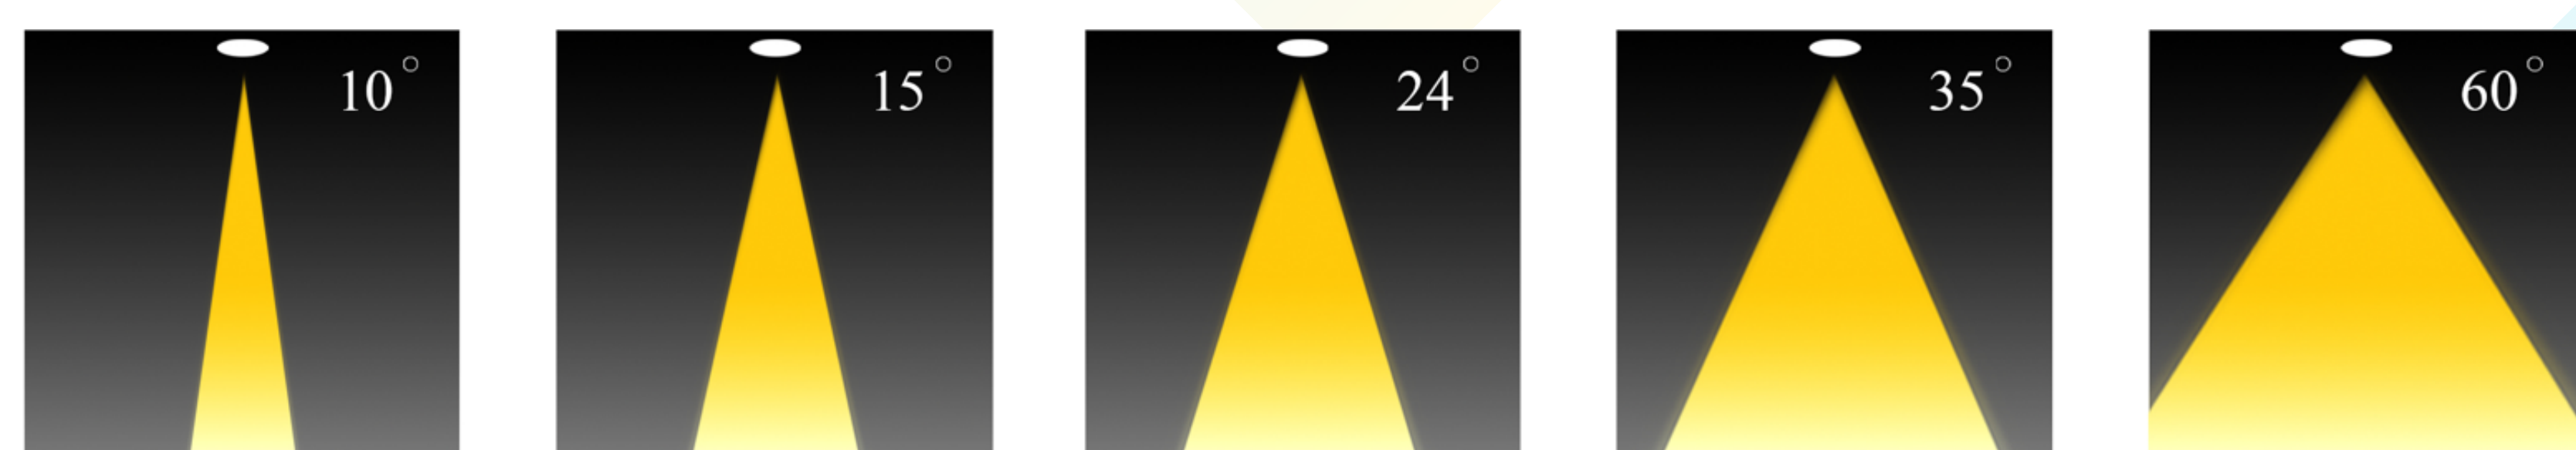

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	Lamp Base	Weight Kg
UD202	2*9 2*12 2*15	90	3000 4000 6000	108x300 mm	N/A	E27	0.765

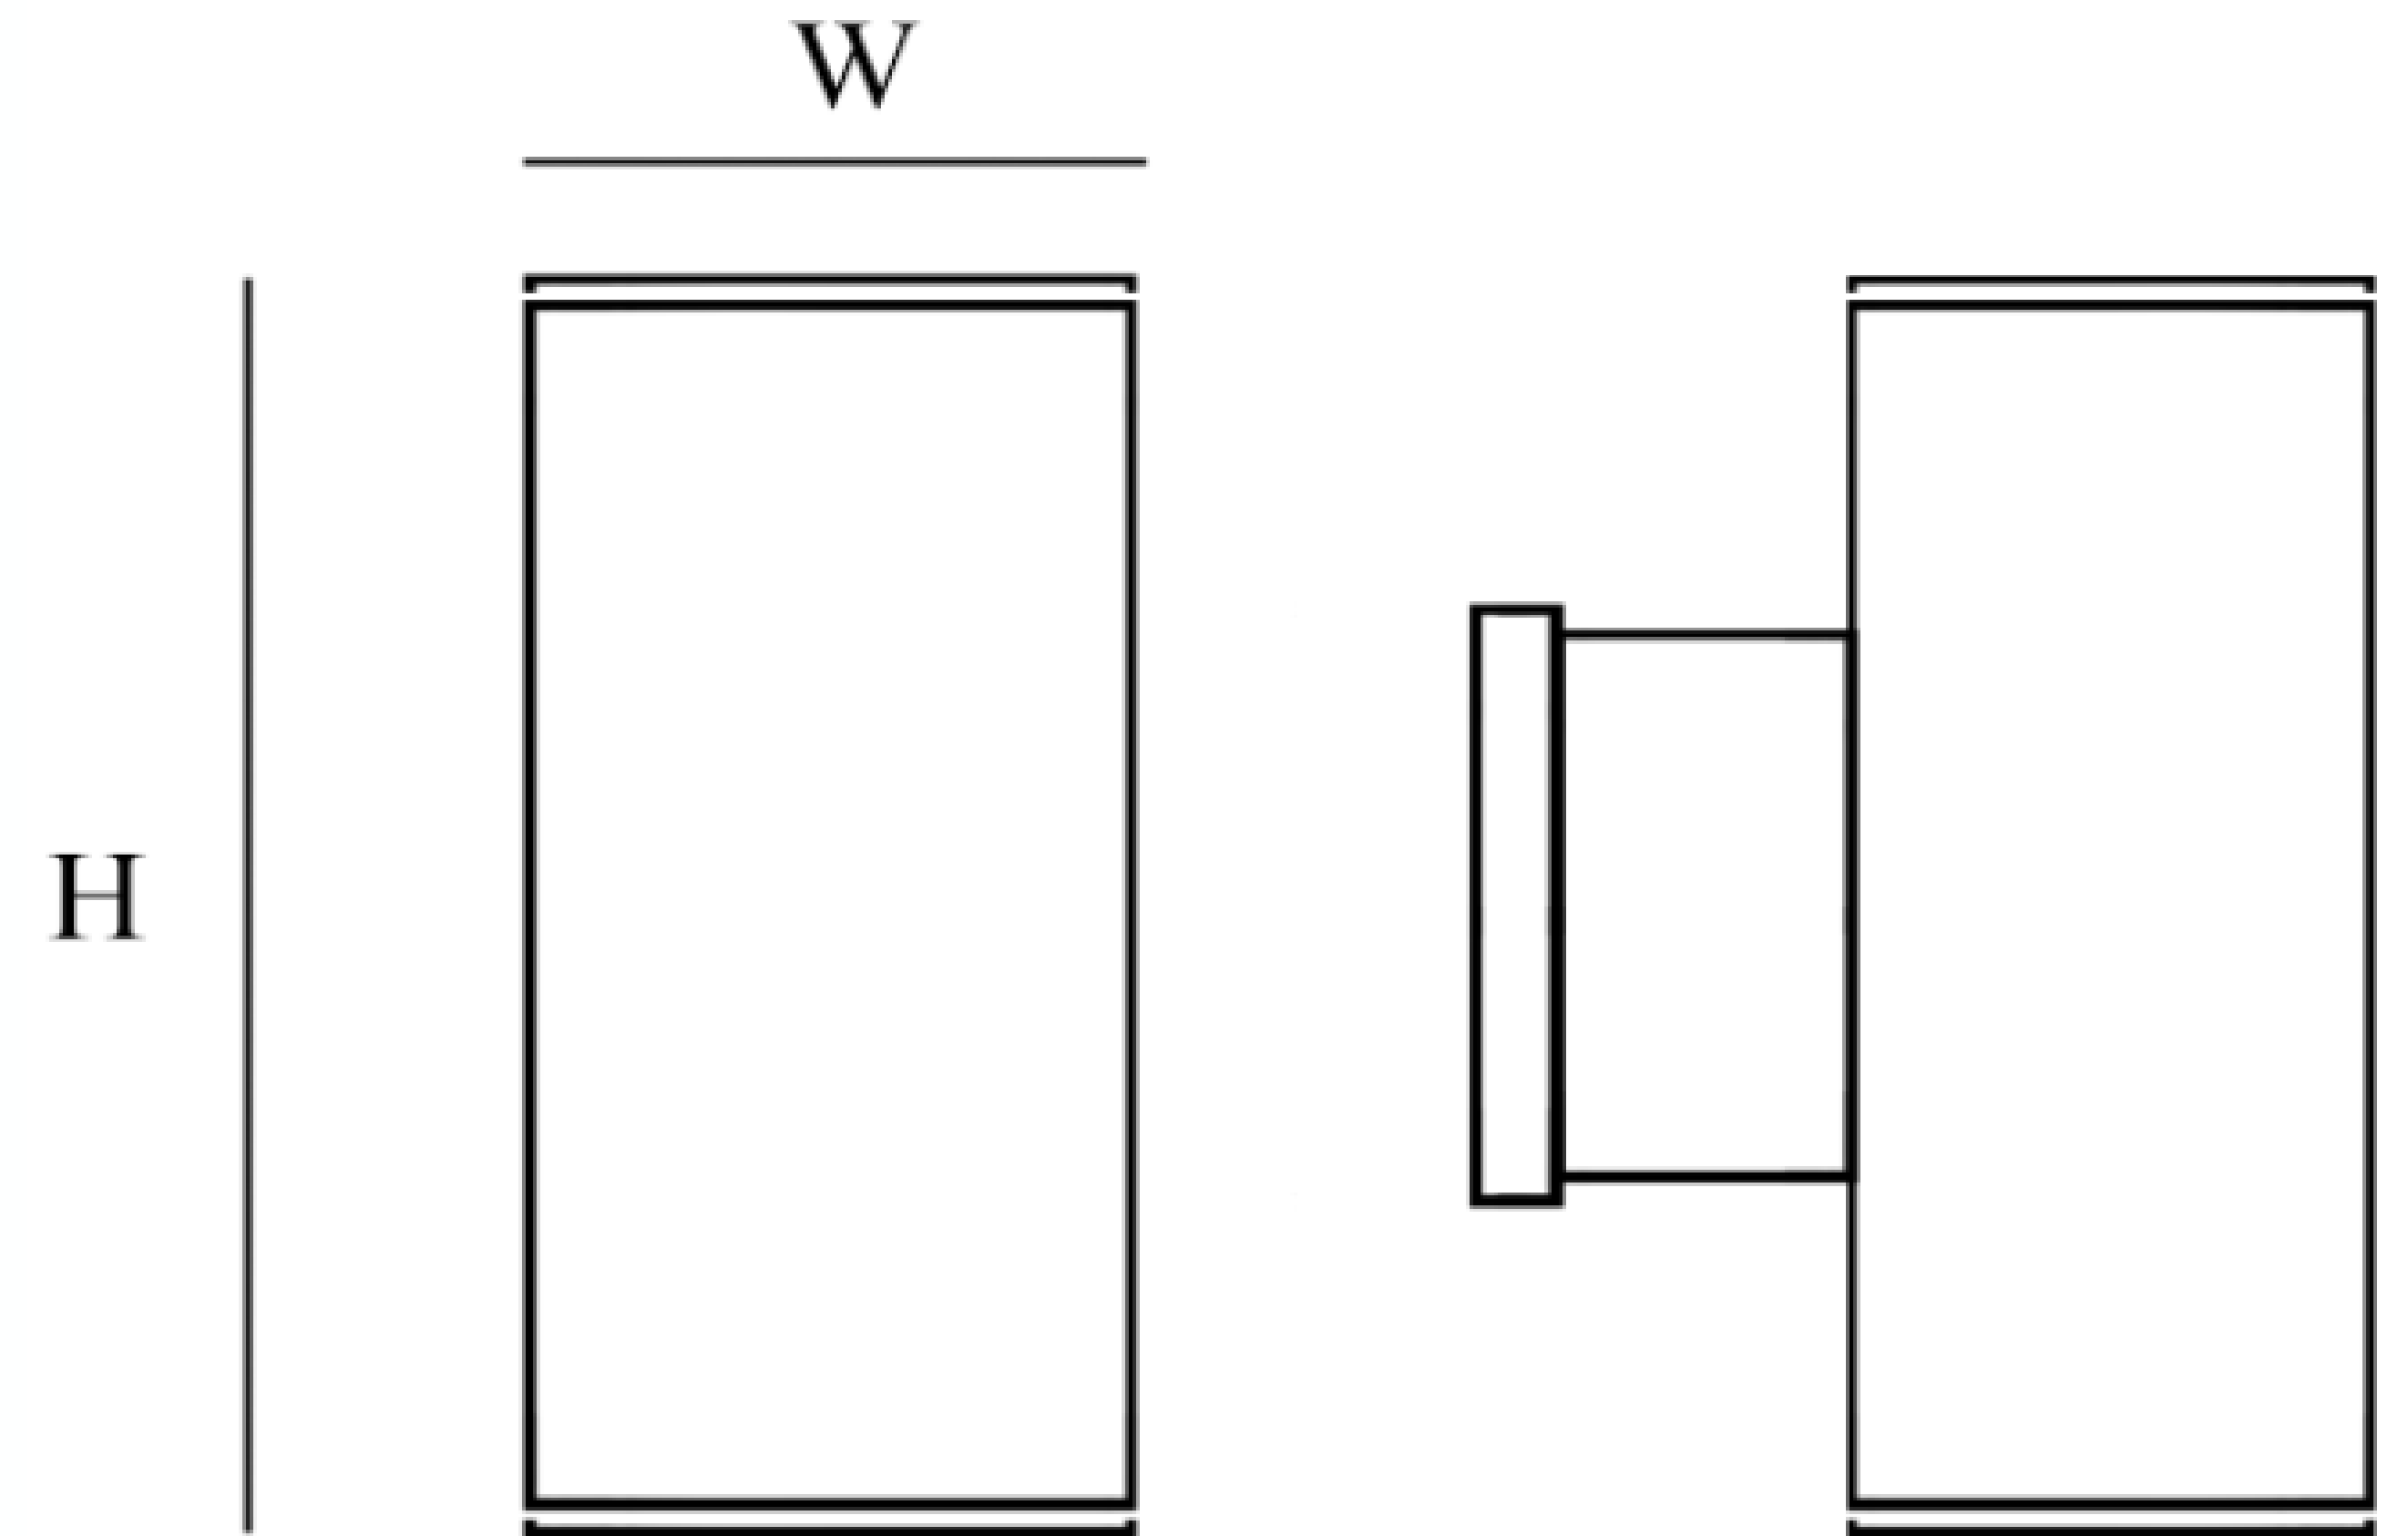

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

POLAR CURVE

