

Up & Down

UD02



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Optic : 36°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum

Mounting : Surface wall mounted


Lens : Clear Glass

Finish : Gray RAL 7016


Protection Class : IP 65

Mechanical resistance : IK 08

OPTICS

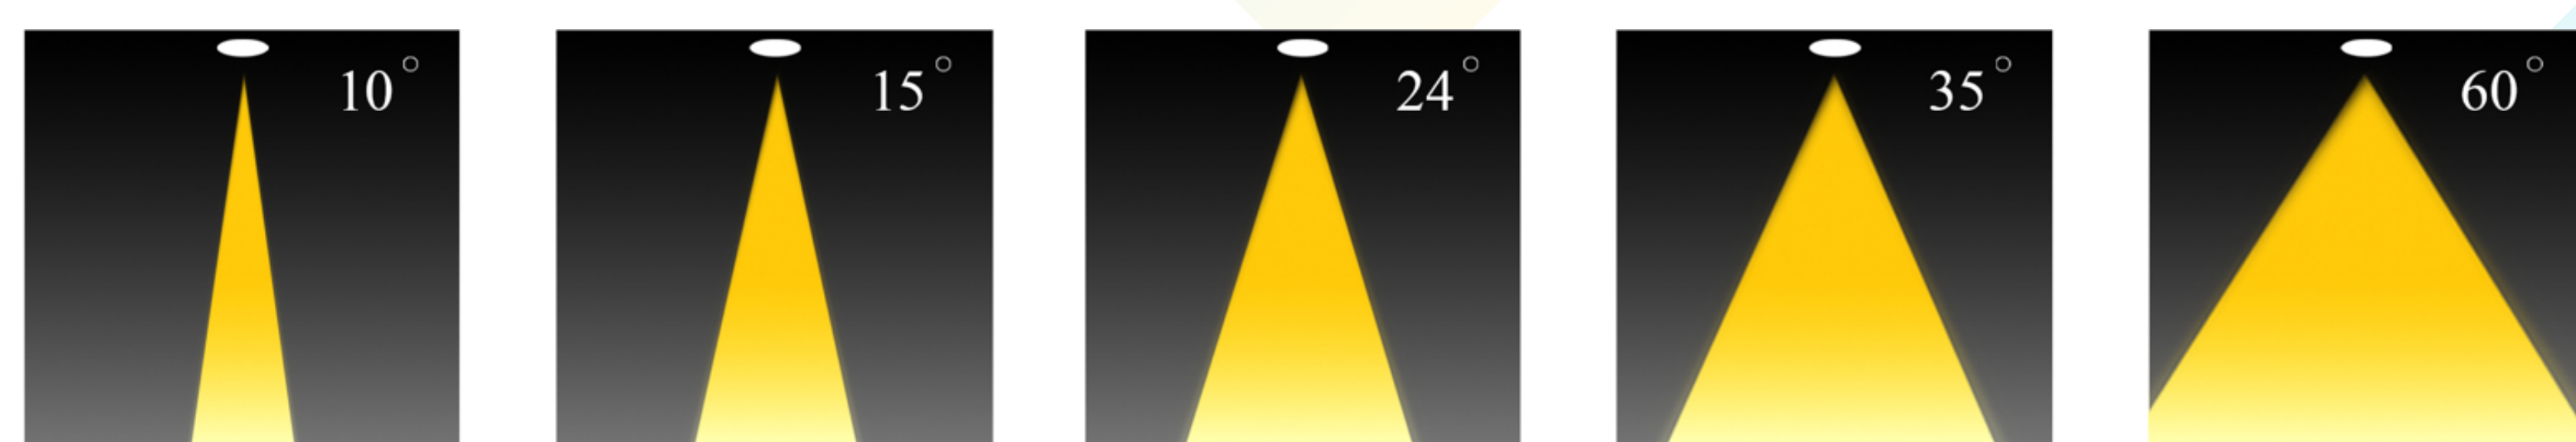

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	LED Chip	Weight
UD02230XXXXOTXXX	2*5 2*7	100	3000 4000		Tridonic	Osram	

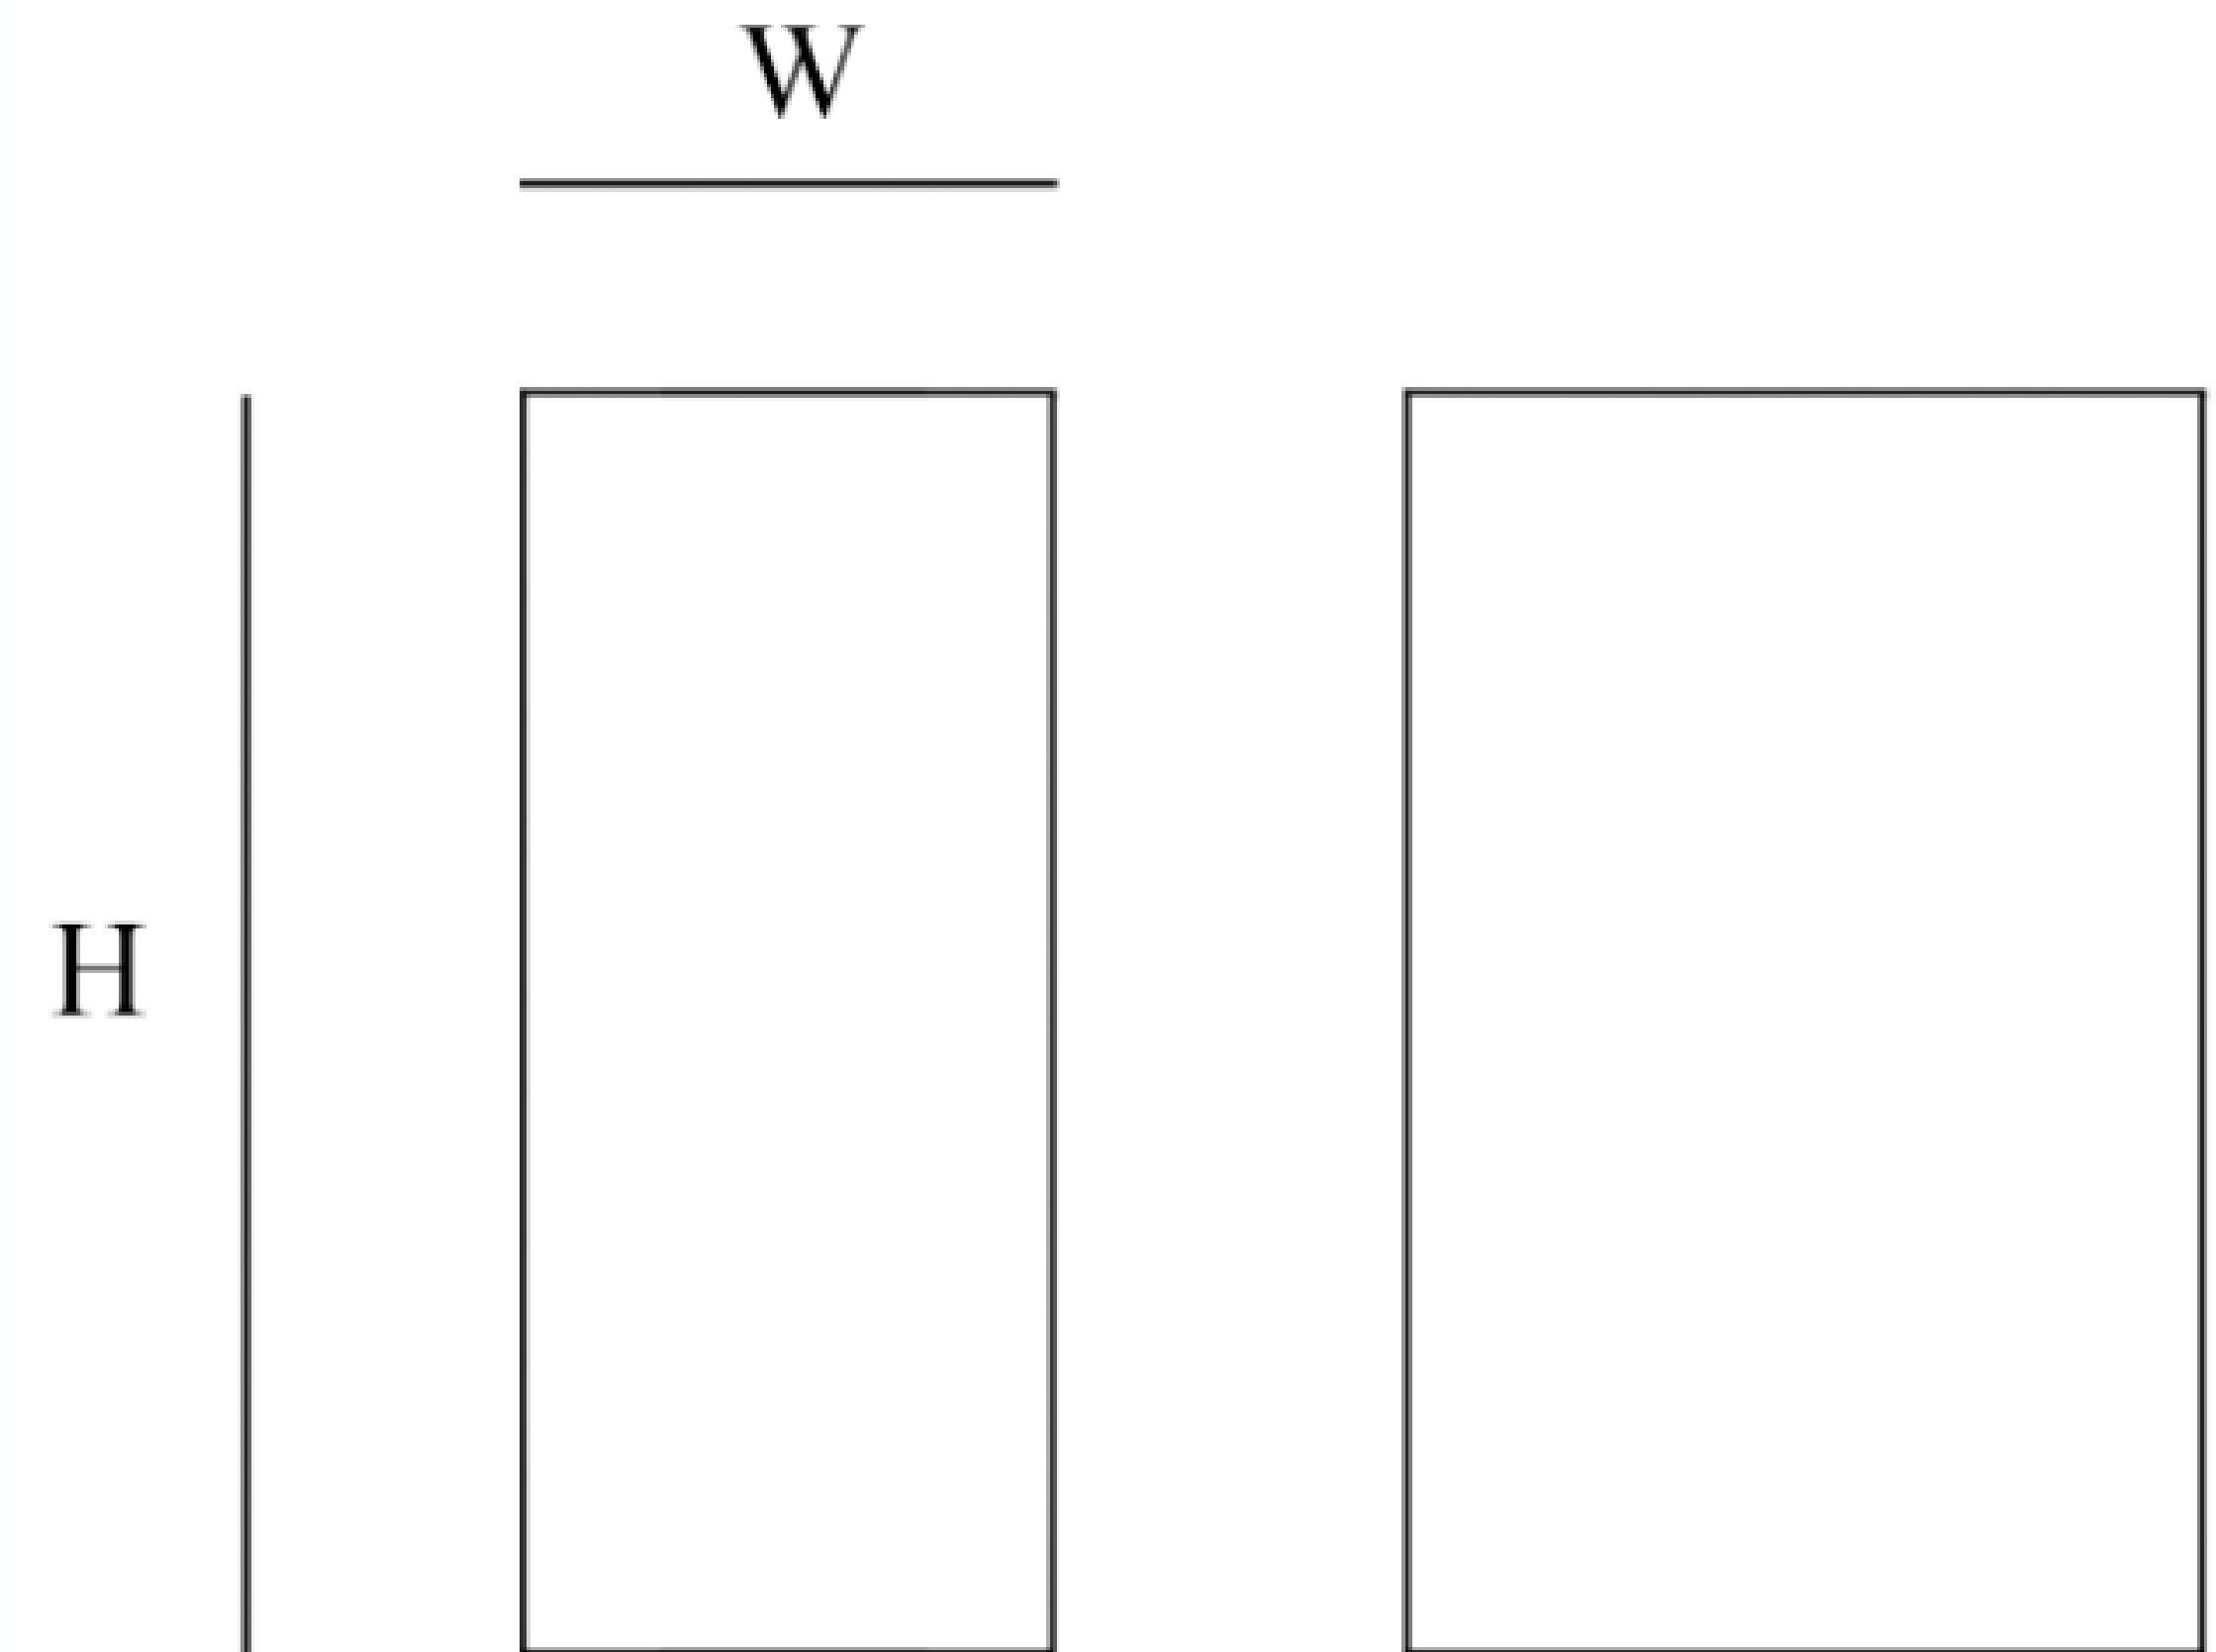

CUSTOMISZE OPTIONS

3K

Light
Temperature
3000K

4K

Light
Temperature
4000K

6.5K

Light
Temperature
6500K

CRI
>80

Color
Rendering
Index >80

DALI

POLAR CURVE

