

Up & Down

UD07



PERFORMANCE DATA

Efficacy : 100 Lm/W

Input Voltage : 110-240V

Frequency : 50Hz

Color Rendering : CRI 80

Color Temperature : 3000K

Life Time : 50,000 hrs

Beam Angle : 24°

Class : I

MECHANICAL SPECIFICATIONS

Material : Die-casting Aluminum and extruded Aluminum

Mounting : Wall light, up and down version


Lens : Clear Glass

Finish : Gray RAL 7016


Protection Class : IP 65

Mechanical resistance : IK 08

OPTICS

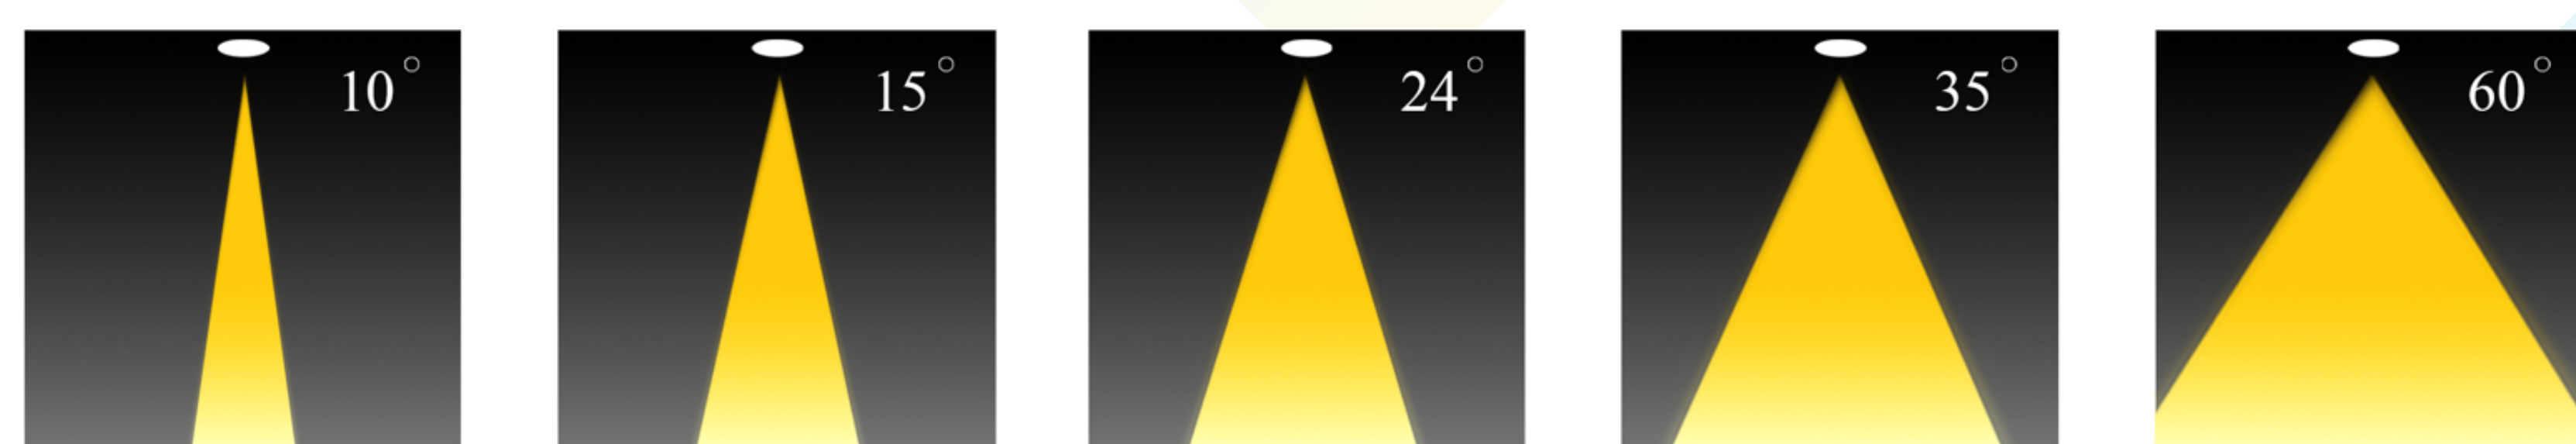

Code	Power W	Efficacy Lm/W	Colour Temp. K	Dimensions WxH mm	Driver	LED Chip	Weight
UD07230XXXXOTXXX	2*5 2*7	100	3000	90x180 mm	Tridonic	Osram	

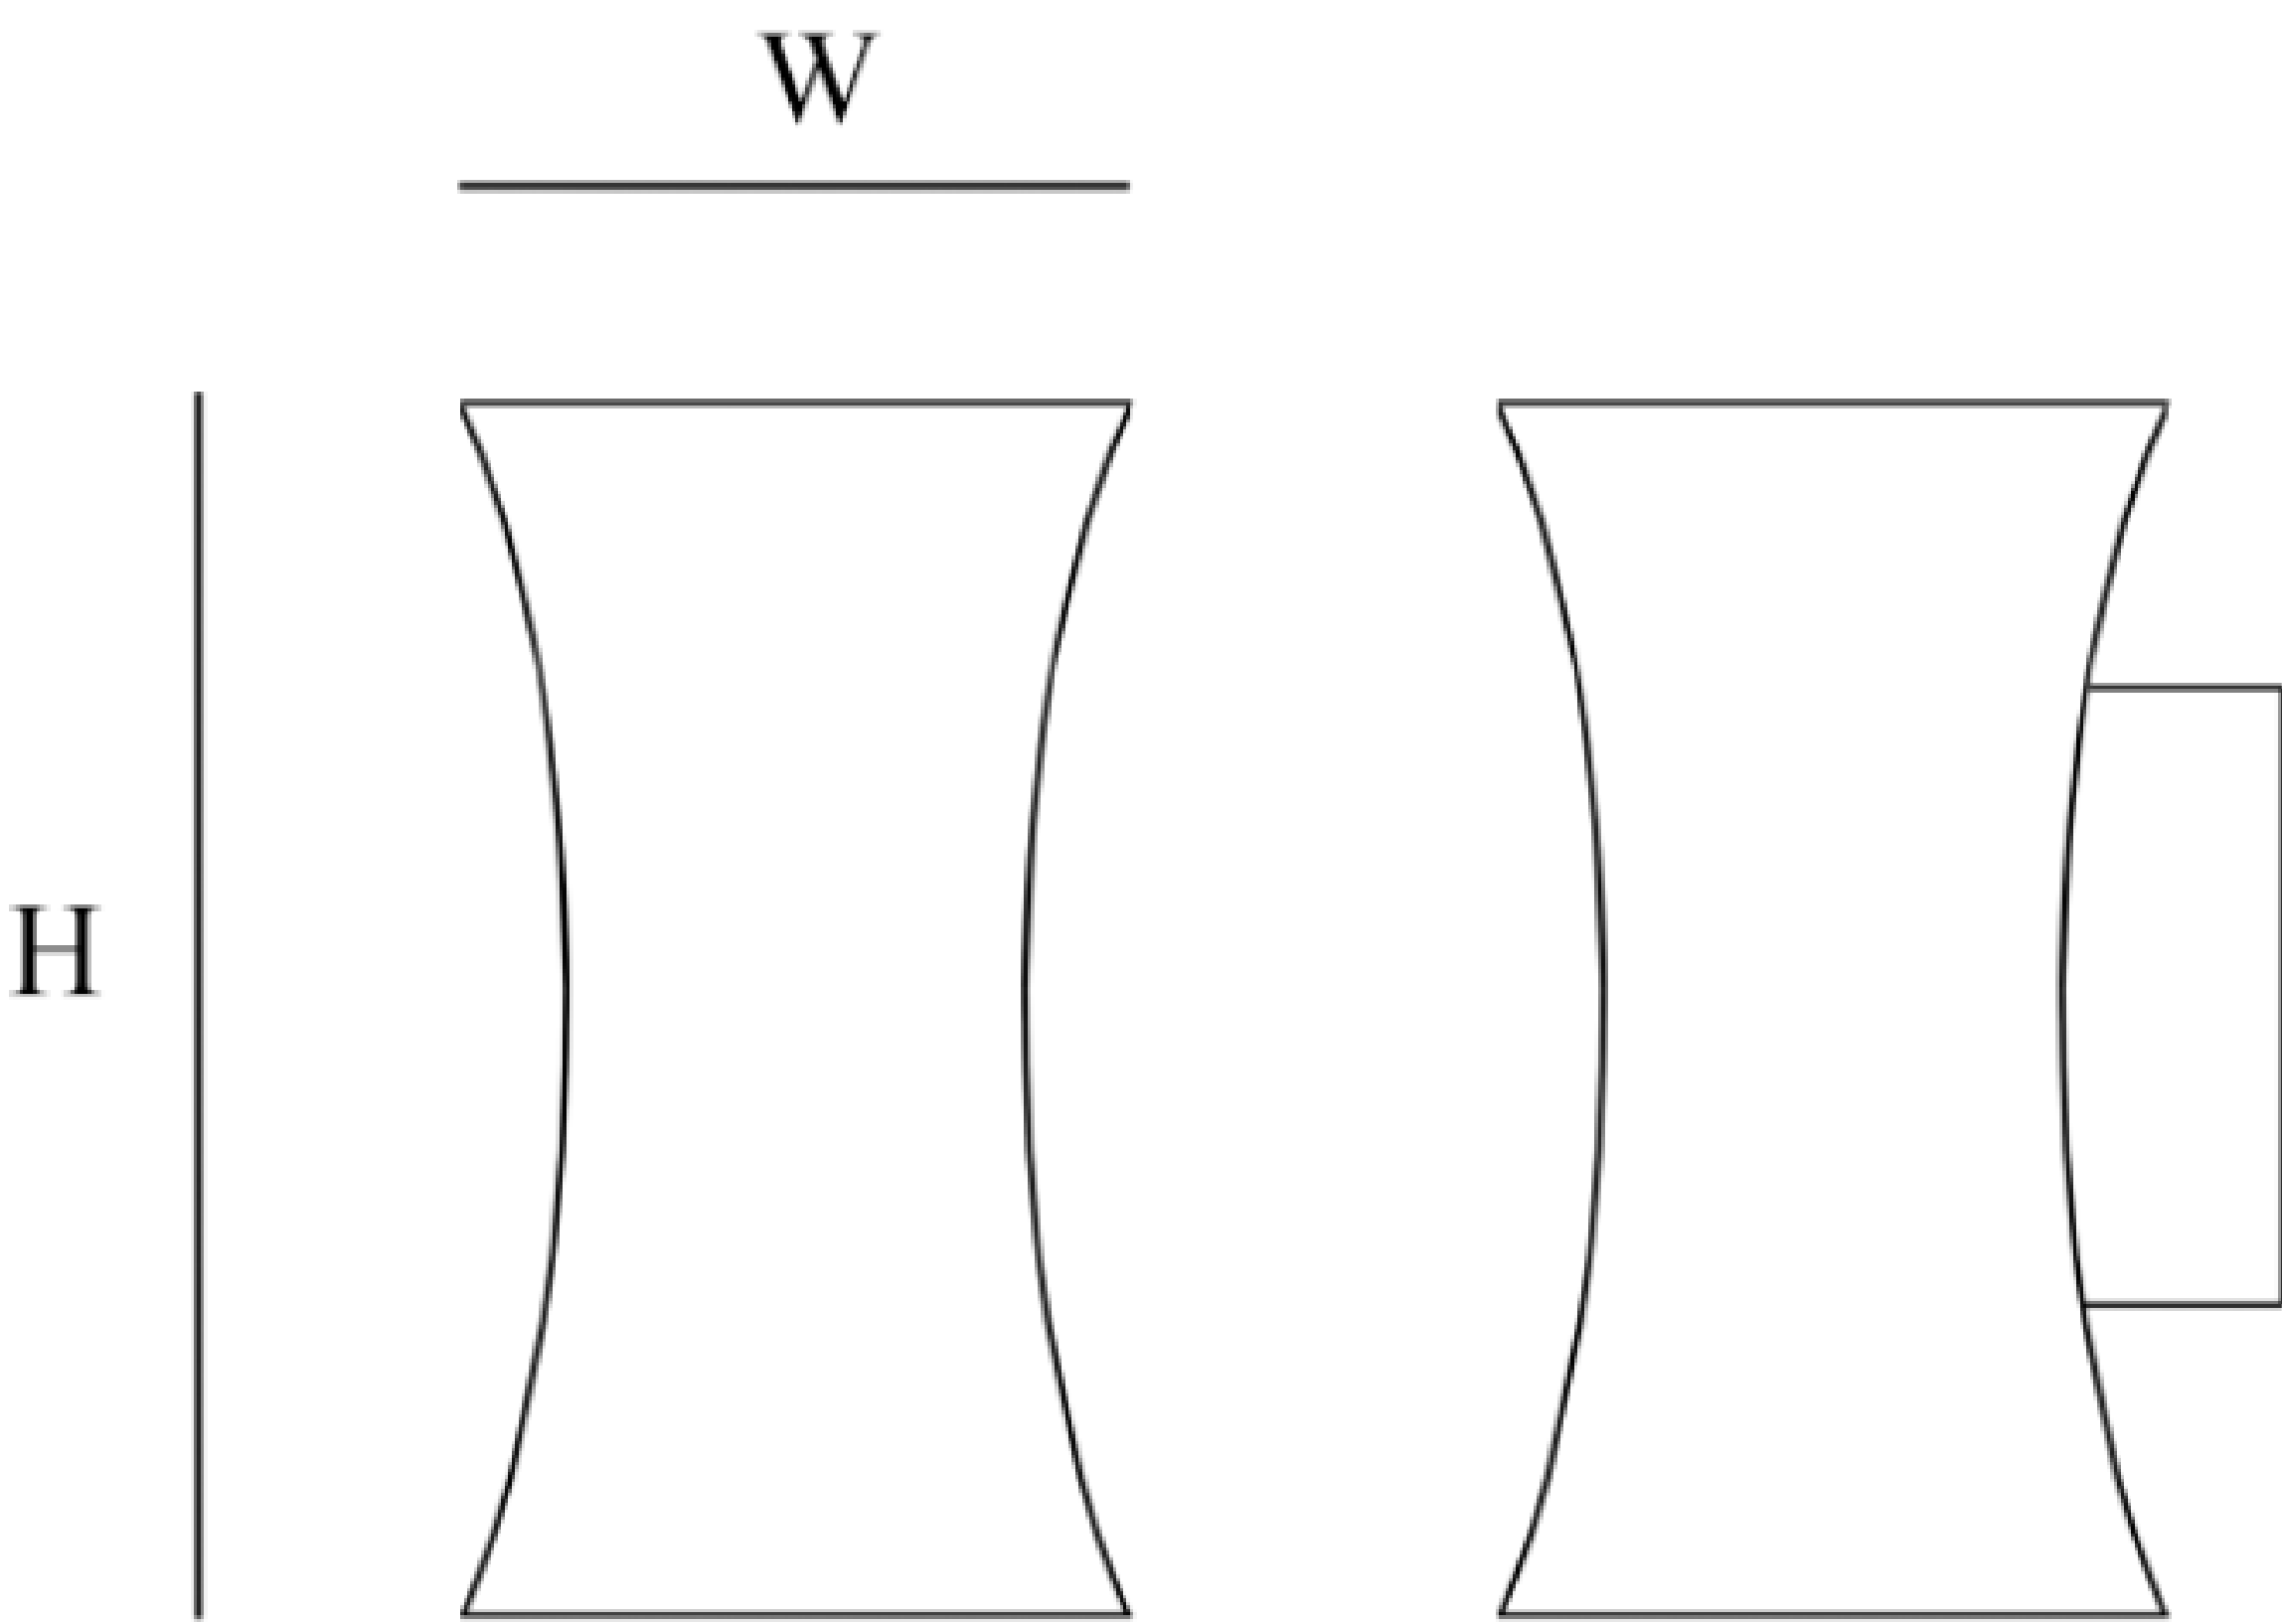

CUSTOMISZE OPTIONS

3K

Light Temperature
3000K

4K

Light Temperature
4000K

6.5K

Light Temperature
6500K

CRI
>80

Color Rendering
Index >80

DALI

POLAR CURVE

